

Q Series



Long tool life and smooth surface finish

For various machining applications from steel
to hard materials <68HRC

NEW

New and improved PVD coating
for VG, VGL and H series



**KEEPS YOU
AHEAD**



For general machining


Q Series

Long tool life and smooth surface finish in medium – finishing application. Stable machining in steel, stainless steel and hard material <68 HRC.



1 Varied interval flute design


Superior anti vibration performance due to variable pitch flute design



2 Wide variety of materials to be machined

High efficiency machining for steel, stainless steel and hardened material <68HRC

3 Wide variety of machining operations

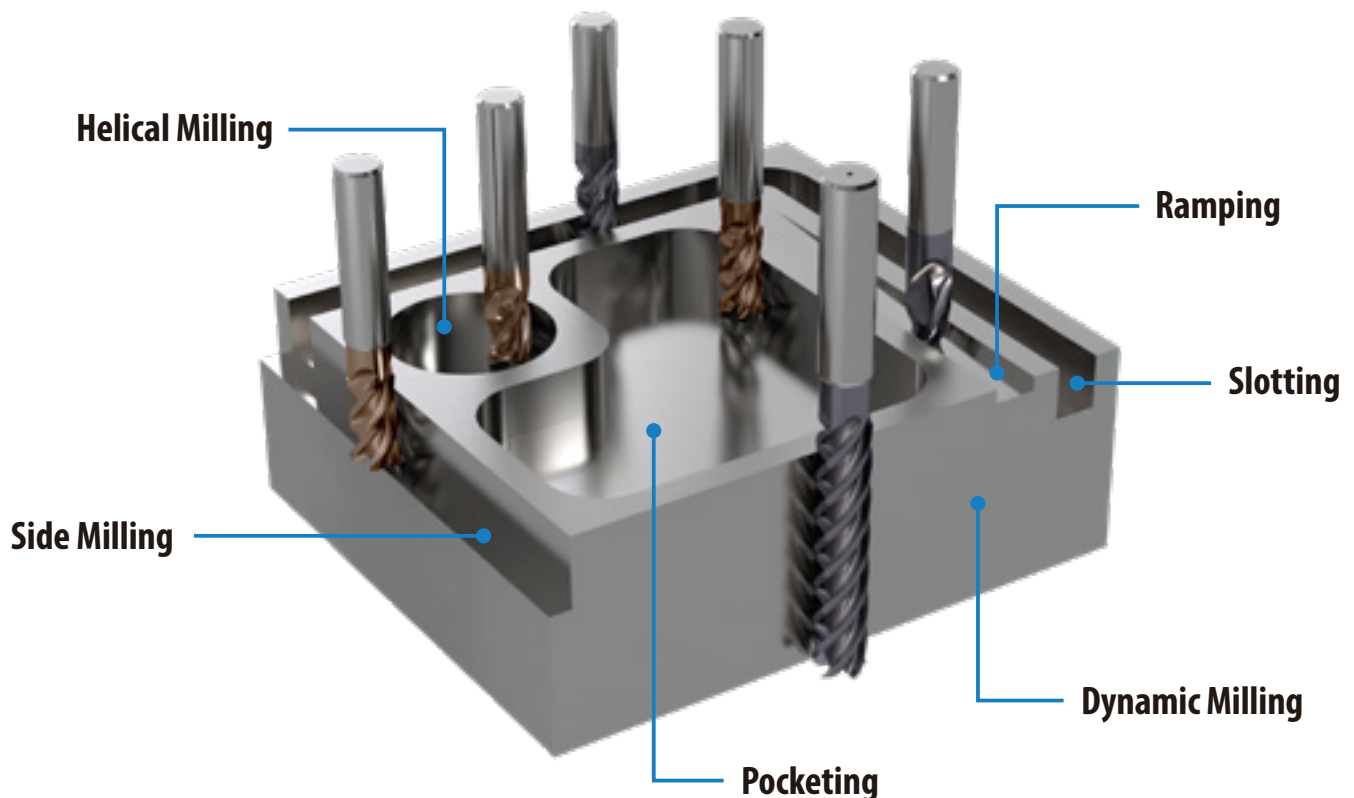


Tool selection guide

Application and selection

Purpose	Series	Workpiece material						Description	No. of flutes	Corner shape	DC (mm)	Length of cut	Coolant holes	Shape (Shank type)	Features
		P	H	M	S	K	N								
		Steel ~30HRC	Hard materials ~68HRC	Stainless steel	Titanium alloys	Cast iron	Aluminum & Non-ferrous metals								
General	Standard	★		★		★	★	2QFSM	2	Square	3-20	Medium	No	 Cylindrical	Superior cutting edge preparation for extended tool life. Improved edge strength for high chipping resistance.
		★		★		★	★	3QFSM	3	Square					
General / High performance	VG	★		★	★	★	★	4QFSM-VG	4	Square	3-20	Medium	No	 Cylindrical	Varied interval flute design and with positive rake angle. Superior anti vibration performance and improved edge strength for high chipping resistance.
General / High performance / Torus	VGL	★		★	★	★	★	4QFRM-VGL	4	Radius	3-20	Medium	No	 Weldon	Varied interval flute design and with positive rake angle. Superior anti vibration performance and improved edge strength for high chipping resistance. Long reach by recess.
Exotic material	VE	☆		★	★			4QFSM-VE	4	Square	3-20	Medium	No	 Cylindrical	Low cutting force design for smooth cutting operations. Positive rake angle for smooth chip evacuation. Varied interval flute design with sharp edge.
		☆		★	★			4QFRM-VE		Radius					
		☆		★	★			5QFRM-VE	5	Radius	6-20				
Trochoidal milling	VTL	★		★	★	★		5QECL-VTL	5	Chamfer	6-16	Long	Yes	 Weldon	Odd number of cutting edges for improved smooth running during trochoidal milling. Unique chipbreaker geometry produces controlled, short chips. Internal coolant supply - Optimal cooling and lubrication in the milling process and improved chip evacuation.
Hard material	H		★					4QFSM-H	4	Square	3-20	Medium	No	 Cylindrical	Longer tool life and stable machining at hard materials due to superior wear resistance from the new and improved PVD coating. Stability oriented design for reliable machining process.
			★					4QFRM-H		Radius					

★ : 1st Recommendation ☆ : 2nd Recommendation


2/3QFSM (Square type)

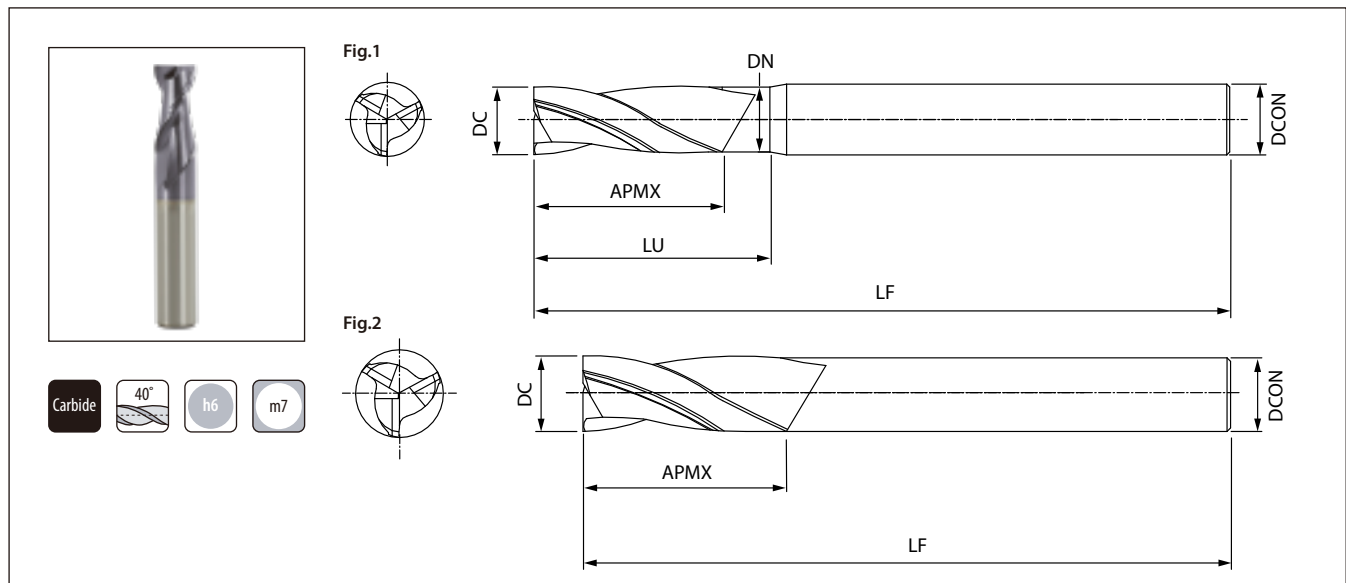

Dimensions (mm)

Description	Availability	øDC	APMX	DN	LU	DCON (h6)	LF	ZEFP	Shape
2QFSM030-090-03	●	3.0	9.0	-	-	3.0	40.0	2	Fig. 2
2QFSM030-090-06	●	3.0	9.0	3.0	11.0	6.0	50.0	2	Fig. 1
2QFSM040-120-04	●	4.0	12.0	-	-	4.0	50.0	2	Fig. 2
2QFSM040-120-06	●	4.0	12.0	4.0	14.0	6.0	50.0	2	Fig. 1
2QFSM050-150-05	●	5.0	15.0	-	-	5.0	50.0	2	Fig. 2
2QFSM050-150-06	●	5.0	15.0	5.0	17.0	6.0	50.0	2	Fig. 1
2QFSM060-160-06	●	6.0	16.0	-	-	6.0	50.0	2	Fig. 2
2QFSM060-200-06	●	6.0	20.0	-	-	6.0	60.0	2	Fig. 2
2QFSM080-200-08	●	8.0	20.0	-	-	8.0	64.0	2	Fig. 2
2QFSM100-220-10	●	10.0	22.0	-	-	10.0	70.0	2	Fig. 2
2QFSM120-250-12	●	12.0	25.0	-	-	12.0	90.0	2	Fig. 2
2QFSM160-320-16	●	16.0	32.0	-	-	16.0	90.0	2	Fig. 2
2QFSM200-380-20	●	20.0	38.0	-	-	20.0	100.0	2	Fig. 2
3QFSM030-090-03	●	3.0	9.0	-	-	3.0	40.0	3	Fig. 2
3QFSM030-090-06	●	3.0	9.0	3.0	11.0	6.0	50.0	3	Fig. 1
3QFSM040-120-04	●	4.0	12.0	-	-	4.0	50.0	3	Fig. 2
3QFSM040-120-06	●	4.0	12.0	4.0	14.0	6.0	50.0	3	Fig. 1
3QFSM050-150-05	●	5.0	15.0	-	-	5.0	50.0	3	Fig. 2
3QFSM050-150-06	●	5.0	15.0	5.0	17.0	6.0	50.0	3	Fig. 1
3QFSM060-160-06	●	6.0	16.0	-	-	6.0	50.0	3	Fig. 2
3QFSM060-200-06	●	6.0	20.0	-	-	6.0	60.0	3	Fig. 2
3QFSM080-200-08	●	8.0	20.0	-	-	8.0	64.0	3	Fig. 2
3QFSM100-220-10	●	10.0	22.0	-	-	10.0	70.0	3	Fig. 2
3QFSM120-250-12	●	12.0	25.0	-	-	12.0	75.0	3	Fig. 2
3QFSM160-320-16	●	16.0	32.0	-	-	16.0	90.0	3	Fig. 2
3QFSM200-380-20	●	20.0	38.0	-	-	20.0	100.0	3	Fig. 2


● : Available

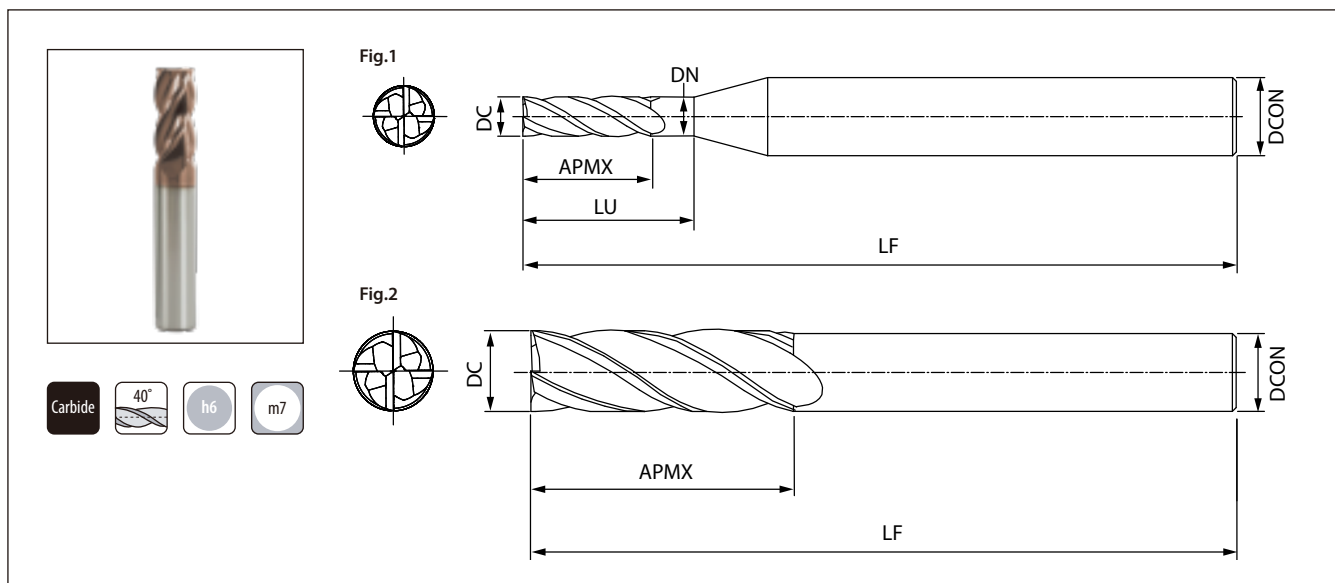

Dimensions (mm)

Description	Availability	øDC	APMX	DN	LU	DCON (h6)	LF	ZEFP	Shape
4QFSM030-090-03-VG	●	3.0	9.0	-	-	3.0	50.0	4	Fig. 2
4QFSM030-090-06-VG	●	3.0	9.0	3.0	11.0	6.0	50.0	4	Fig. 1
4QFSM040-120-04-VG	●	4.0	12.0	-	-	4.0	50.0	4	Fig. 2
4QFSM040-120-06-VG	●	4.0	12.0	4.0	14.0	6.0	50.0	4	Fig. 1
4QFSM050-150-05-VG	●	5.0	15.0	-	-	5.0	50.0	4	Fig. 2
4QFSM060-160-06-VG	●	6.0	16.0	-	-	6.0	50.0	4	Fig. 2
4QFSM060-200-06-VG	●	6.0	20.0	-	-	6.0	60.0	4	Fig. 2
4QFSM080-220-08-VG	●	8.0	22.0	-	-	8.0	64.0	4	Fig. 2
4QFSM100-270-10-VG	●	10.0	27.0	-	-	10.0	70.0	4	Fig. 2
4QFSM100-220-10-VG	●	10.0	22.0	-	-	10.0	75.0	4	Fig. 2
4QFSM120-320-12-VG	●	12.0	32.0	-	-	12.0	75.0	4	Fig. 2
4QFSM160-320-16-VG	●	16.0	32.0	-	-	16.0	90.0	4	Fig. 2
4QFSM200-380-20-VG	●	20.0	38.0	-	-	20.0	100.0	4	Fig. 2

●: Available

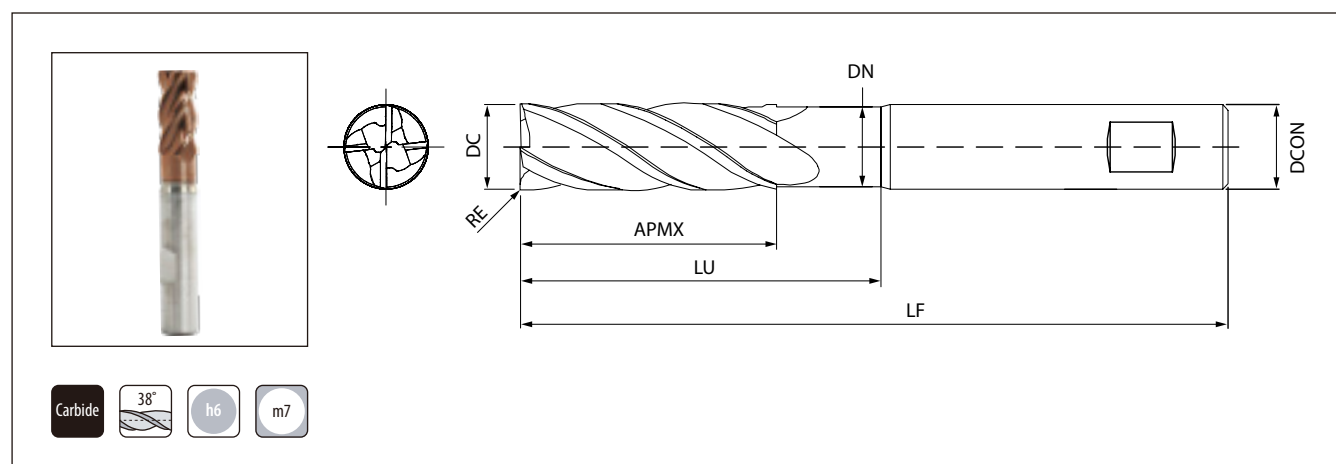


Dimensions (mm)

Description	Availability	øDC	RE	APMX	DN	LU	DCON (h6)	LF	ZEFP
4QFRM030-090-06-R03-VGL	●	3.0	0.3	9.0	2.8	15.0	6.0	57.0	4
4QFRM030-090-06-R05-VGL	●	3.0	0.5	9.0	2.8	15.0	6.0	57.0	4
4QFRM040-120-06-R03-VGL	●	4.0	0.3	12.0	3.7	20.0	6.0	57.0	4
4QFRM040-120-06-R05-VGL	●	4.0	0.5	12.0	3.7	20.0	6.0	57.0	4
4QFRM050-150-06-R03-VGL	●	5.0	0.3	15.0	4.6	22.0	6.0	57.0	4
4QFRM050-150-06-R05-VGL	●	5.0	0.5	15.0	4.6	22.0	6.0	57.0	4
4QFRM060-160-06-R03-VGL	●	6.0	0.3	16.0	5.5	22.0	6.0	57.0	4
4QFRM060-160-06-R05-VGL	●	6.0	0.5	16.0	5.5	22.0	6.0	57.0	4
4QFRM060-160-06-R10-VGL	●	6.0	1.0	16.0	5.5	22.0	6.0	57.0	4
4QFRM080-200-08-R03-VGL	●	8.0	0.3	20.0	7.4	26.0	8.0	64.0	4
4QFRM080-200-08-R05-VGL	●	8.0	0.5	20.0	7.4	26.0	8.0	64.0	4
4QFRM080-200-08-R10-VGL	●	8.0	1.0	20.0	7.4	26.0	8.0	64.0	4
4QFRM080-200-08-R20-VGL	●	8.0	2.0	20.0	7.4	26.0	8.0	64.0	4
4QFRM100-220-10-R05-VGL	●	10.0	0.5	22.0	9.2	30.0	10.0	70.0	4
4QFRM100-220-10-R10-VGL	●	10.0	1.0	22.0	9.2	30.0	10.0	70.0	4
4QFRM100-220-10-R20-VGL	●	10.0	2.0	22.0	9.2	30.0	10.0	70.0	4
4QFRM120-250-12-R05-VGL	●	12.0	0.5	25.0	11.0	35.0	12.0	83.0	4
4QFRM120-250-12-R10-VGL	●	12.0	1.0	25.0	11.0	35.0	12.0	83.0	4
4QFRM120-250-12-R20-VGL	●	12.0	2.0	25.0	11.0	35.0	12.0	83.0	4
4QFRM160-320-16-R05-VGL	●	16.0	0.5	32.0	15.0	42.0	16.0	90.0	4
4QFRM160-320-16-R10-VGL	●	16.0	1.0	32.0	15.0	42.0	16.0	90.0	4
4QFRM160-320-16-R20-VGL	●	16.0	2.0	32.0	15.0	42.0	16.0	90.0	4
4QFRM160-320-16-R30-VGL	●	16.0	3.0	32.0	15.0	42.0	16.0	90.0	4
4QFRM200-380-20-R05-VGL	●	20.0	0.5	38.0	19.0	50.0	20.0	100.0	4
4QFRM200-380-20-R10-VGL	●	20.0	1.0	38.0	19.0	50.0	20.0	100.0	4
4QFRM200-380-20-R20-VGL	●	20.0	2.0	38.0	19.0	50.0	20.0	100.0	4
4QFRM200-380-20-R30-VGL	●	20.0	3.0	38.0	19.0	50.0	20.0	100.0	4

● : Available

4QFSM-VE (Square type)

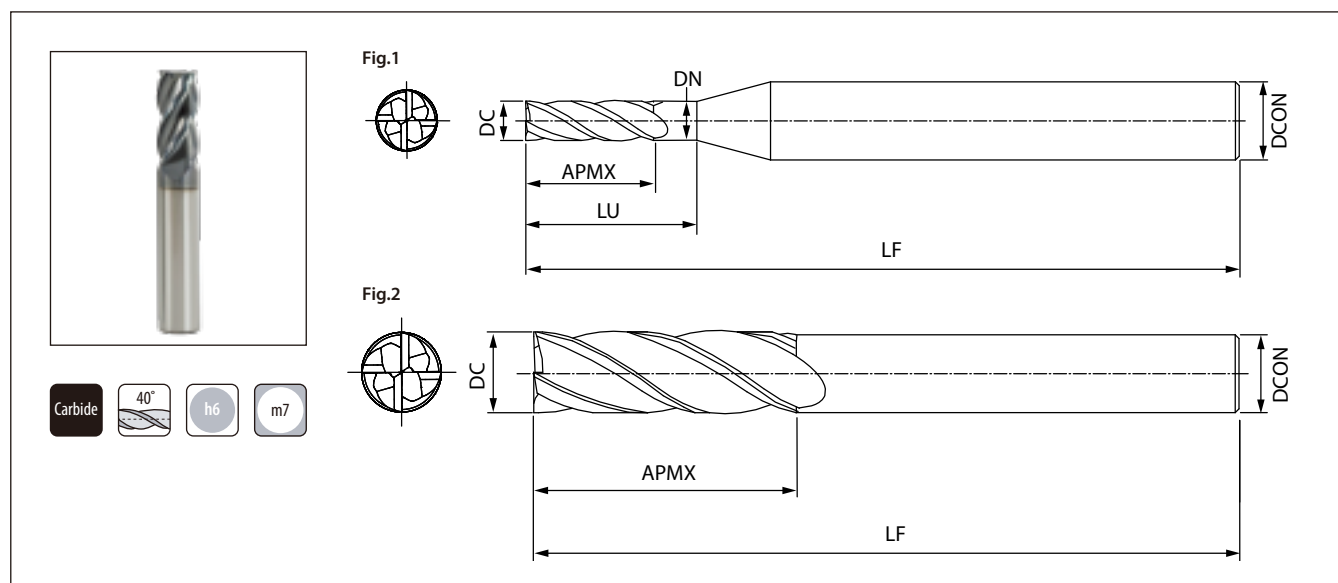


Dimensions (mm)

Description	Availability	øDC	APMX	DN	LU	DCON (h6)	LF	ZEFP	Shape
4QFSM030-090-06-VE	●	3.0	9.0	3.0	11.0	6.0	50.0	4	Fig. 1
4QFSM040-120-06-VE	●	4.0	12.0	4.0	14.0	6.0	50.0	4	Fig. 1
4QFSM050-130-06-VE	●	5.0	13.0	5.0	15.0	6.0	50.0	4	Fig. 1
4QFSM060-130-06-VE	●	6.0	13.0	-	-	6.0	50.0	4	Fig. 2
4QFSM080-200-08-VE	●	8.0	20.0	-	-	8.0	64.0	4	Fig. 2
4QFSM100-220-10-VE	●	10.0	22.0	-	-	10.0	70.0	4	Fig. 2
4QFSM120-260-12-VE	●	12.0	26.0	-	-	12.0	75.0	4	Fig. 2
4QFSM160-320-16-VE	●	16.0	32.0	-	-	16.0	90.0	4	Fig. 2
4QFSM200-380-20-VE	●	20.0	38.0	-	-	20.0	100.0	4	Fig. 2

● : Available

4/5QFRM-VE (Radius type)

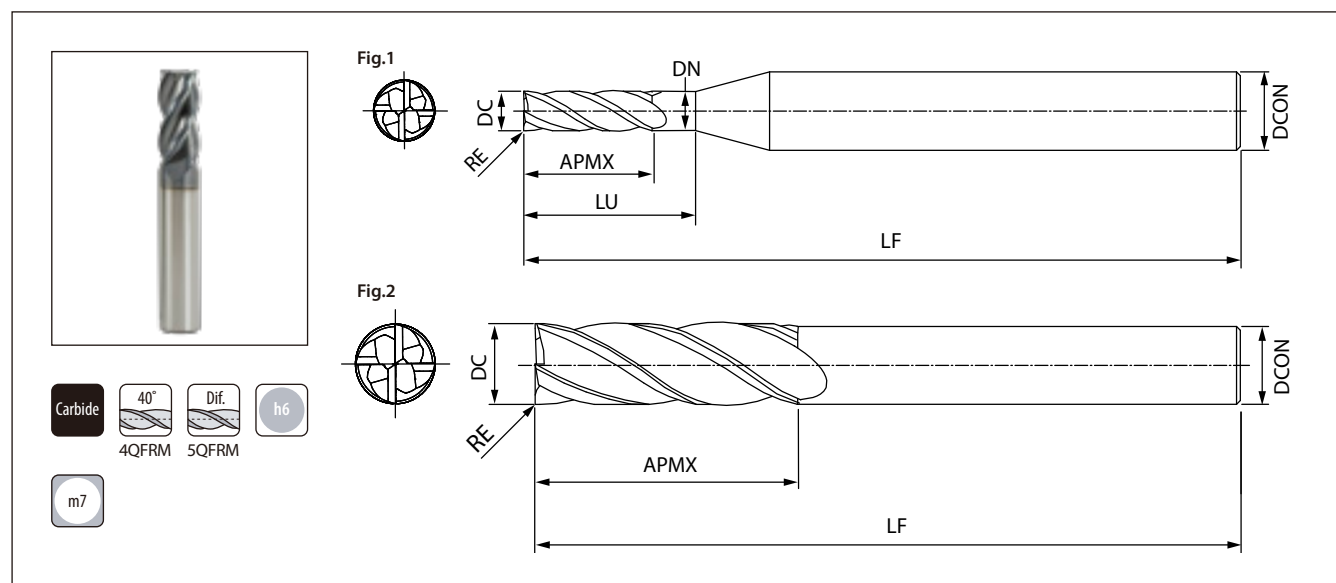

Dimensions (mm)

Description	Availability	øDC	RE	APMX	DN	LU	DCON (h6)	LF	ZEFP	Shape
4QFRM030-090-03-R03-VE	●	3.0	0.3	9.0	-	-	3.0	40.0	4	Fig. 2
4QFRM030-090-03-R05-VE	●	3.0	0.5	9.0	-	-	3.0	40.0	4	Fig. 2
4QFRM030-090-06-R03-VE	●	3.0	0.3	9.0	3.0	11.0	6.0	50.0	4	Fig. 1
4QFRM030-090-06-R05-VE	●	3.0	0.5	9.0	3.0	11.0	6.0	50.0	4	Fig. 1
4QFRM040-120-04-R03-VE	●	4.0	0.3	12.0	-	-	4.0	50.0	4	Fig. 2
4QFRM040-120-04-R05-VE	●	4.0	0.5	12.0	-	-	4.0	50.0	4	Fig. 2
4QFRM040-120-06-R03-VE	●	4.0	0.3	12.0	4.0	14.0	6.0	50.0	4	Fig. 1
4QFRM040-120-06-R05-VE	●	4.0	0.5	12.0	4.0	14.0	6.0	50.0	4	Fig. 1
4QFRM050-150-06-R03-VE	●	5.0	0.3	15.0	5.0	17.0	6.0	50.0	4	Fig. 1
4QFRM050-150-06-R05-VE	●	5.0	0.5	15.0	5.0	17.0	6.0	50.0	4	Fig. 1
4QFRM060-160-06-R03-VE	●	6.0	0.3	16.0	-	-	6.0	50.0	4	Fig. 2
4QFRM060-160-06-R05-VE	●	6.0	0.5	16.0	-	-	6.0	50.0	4	Fig. 2
4QFRM060-160-06-R10-VE	●	6.0	1.0	16.0	-	-	6.0	50.0	4	Fig. 2
4QFRM080-200-08-R03-VE	●	8.0	0.3	20.0	-	-	8.0	64.0	4	Fig. 2
4QFRM080-200-08-R05-VE	●	8.0	0.5	20.0	-	-	8.0	64.0	4	Fig. 2
4QFRM080-200-08-R10-VE	●	8.0	1.0	20.0	-	-	8.0	64.0	4	Fig. 2
4QFRM080-200-08-R20-VE	●	8.0	2.0	20.0	-	-	8.0	64.0	4	Fig. 2
4QFRM100-220-10-R05-VE	●	10.0	0.5	22.0	-	-	10.0	70.0	4	Fig. 2
4QFRM100-220-10-R10-VE	●	10.0	1.0	22.0	-	-	10.0	70.0	4	Fig. 2
4QFRM100-220-10-R15-VE	●	10.0	1.5	22.0	-	-	10.0	70.0	4	Fig. 2
4QFRM100-220-10-R20-VE	●	10.0	2.0	22.0	-	-	10.0	70.0	4	Fig. 2
4QFRM120-250-12-R05-VE	●	12.0	0.5	25.0	-	-	12.0	75.0	4	Fig. 2
4QFRM120-250-12-R10-VE	●	12.0	1.0	25.0	-	-	12.0	75.0	4	Fig. 2
4QFRM120-250-12-R20-VE	●	12.0	2.0	25.0	-	-	12.0	75.0	4	Fig. 2
4QFRM120-250-12-R30-VE	●	12.0	3.0	25.0	-	-	12.0	75.0	4	Fig. 2

● : Available


4/5QFRM-VE (Radius type)

Dimensions (mm)

Description	Availability	øDC	RE	APMX	DN	LU	DCON (h6)	LF	ZEFP	Shape
4QFRM160-320-16-R10-VE	●	16.0	1.0	32.0	-	-	16.0	90.0	4	Fig. 2
4QFRM160-320-16-R20-VE	●	16.0	2.0	32.0	-	-	16.0	90.0	4	Fig. 2
4QFRM160-320-16-R30-VE	●	16.0	3.0	32.0	-	-	16.0	90.0	4	Fig. 2
4QFRM200-380-20-R10-VE	●	20.0	1.0	38.0	-	-	20.0	100.0	4	Fig. 2
4QFRM200-380-20-R20-VE	●	20.0	2.0	38.0	-	-	20.0	100.0	4	Fig. 2
4QFRM200-380-20-R30-VE	●	20.0	3.0	38.0	-	-	20.0	100.0	4	Fig. 2
5QFRM060-250-06-R01-VE	●	6.0	0.1	25.0	-	-	6.0	75.0	5	Fig. 2
5QFRM080-250-08-R02-VE	●	8.0	0.2	25.0	-	-	8.0	75.0	5	Fig. 2
5QFRM100-380-10-R02-VE	●	10.0	0.2	38.0	-	-	10.0	100.0	5	Fig. 2
5QFRM120-450-12-R03-VE	●	12.0	0.3	45.0	-	-	12.0	100.0	5	Fig. 2
5QFRM160-550-16-R03-VE	●	16.0	0.3	55.0	-	-	16.0	125.0	5	Fig. 2
5QFRM200-650-20-R03-VE	●	20.0	0.3	65.0	-	-	20.0	125.0	5	Fig. 2

● : Available


5QECL-VTL (Chamfer type, Weldon)

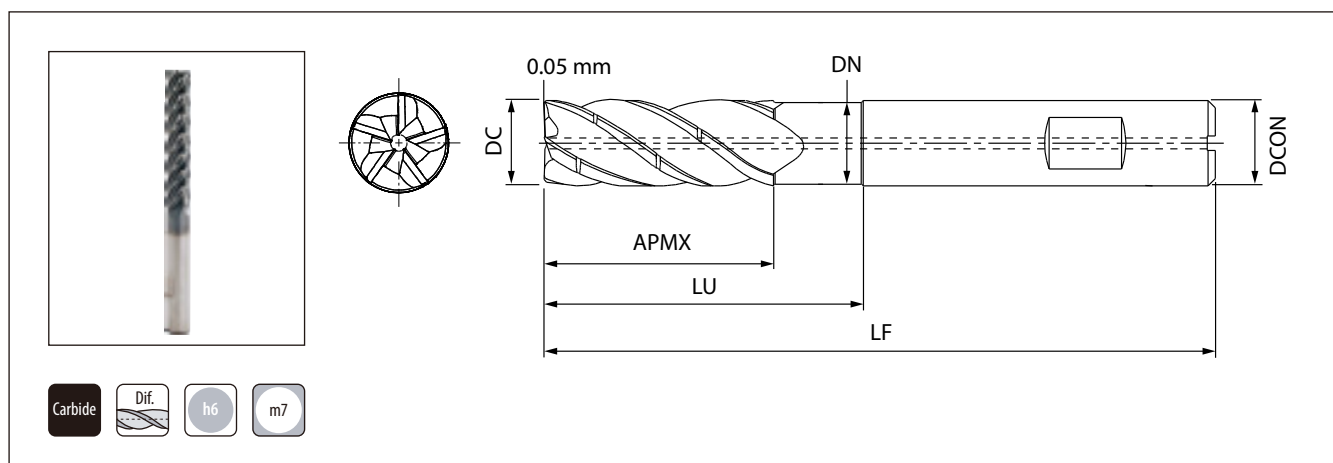

Dimensions (mm)

Description	Availability	øDC	APMX	DN	LU	DCON (h6)	LF	ZEFP
5QECL060-320-06VTL	●	6.0	32.0	5.60	38.0	6.0	75.0	5
5QECL080-420-08VTL	●	8.0	42.0	7.60	46.0	8.0	83.0	5
5QECL100-520-10VTL	●	10.0	52.0	9.50	59.0	10.0	100.0	5
5QECL120-620-12VTL	●	12.0	62.0	11.40	73.0	12.0	119.0	5
5QECL160-820-16VTL	●	16.0	82.0	15.20	91.0	16.0	140.0	5


● : Available

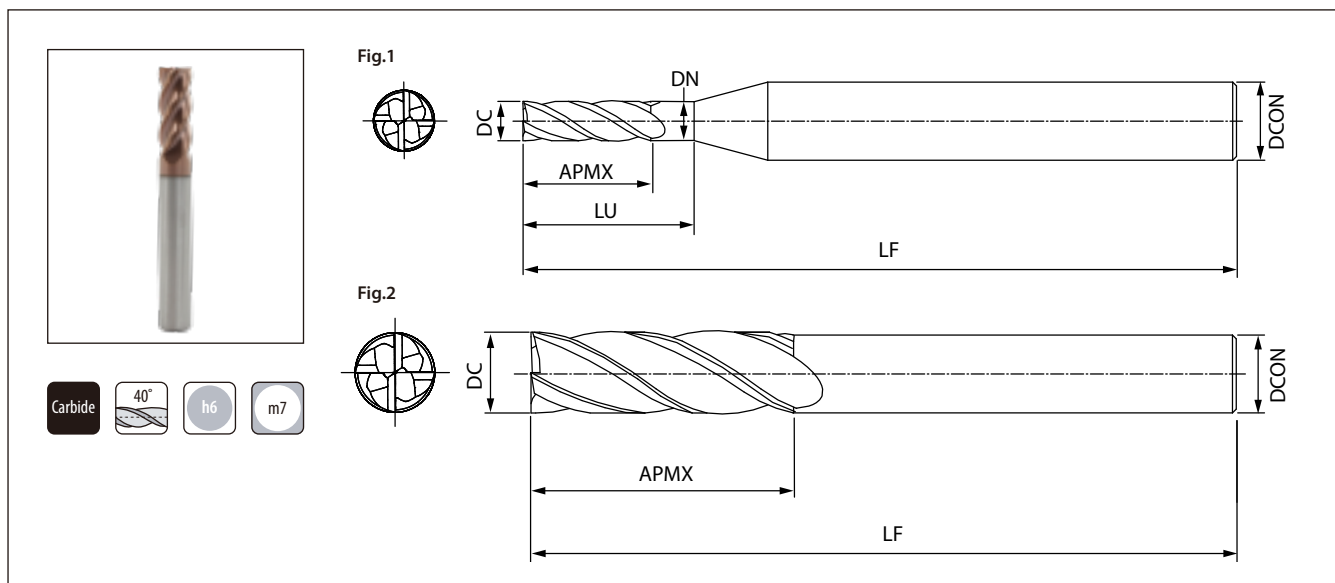

Dimensions (mm)

Description	Availability	DC	APMX	DN	LU	DCON (h6)	LF	ZEFP	Shape
4QFSM030-090-06-H	●	3.0	9.0	3.0	11.0	6.0	50.0	4	Fig. 1
4QFSM040-120-06-H	●	4.0	12.0	4.0	14.0	6.0	50.0	4	Fig. 1
4QFSM050-150-06-H	●	5.0	15.0	5.0	17.0	6.0	50.0	4	Fig. 1
4QFSM060-160-06-H	●	6.0	16.0	-	-	6.0	50.0	4	Fig. 2
4QFSM080-200-08-H	●	8.0	20.0	-	-	8.0	64.0	4	Fig. 2
4QFSM100-220-10-H	●	10.0	22.0	-	-	10.0	70.0	4	Fig. 2
4QFSM120-250-12-H	●	12.0	25.0	-	-	12.0	75.0	4	Fig. 2
4QFSM160-320-16-H	●	16.0	32.0	-	-	16.0	90.0	4	Fig. 2
4QFSM200-380-20-H	●	20.0	38.0	-	-	20.0	100.0	4	Fig. 2

● : Available

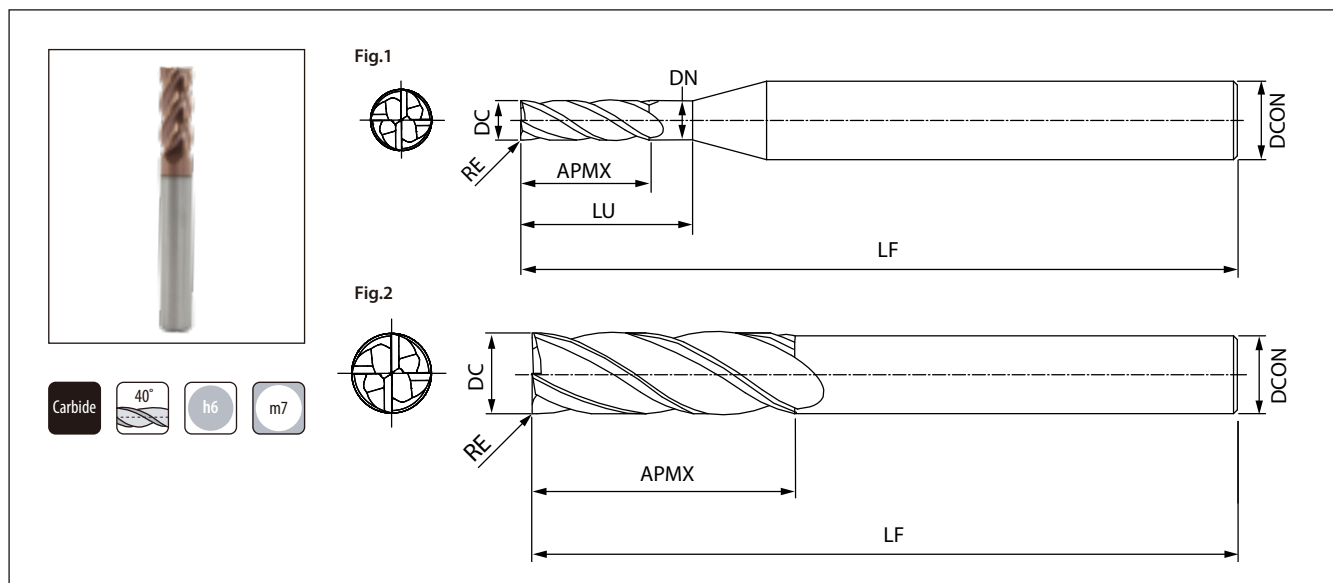
Dimensions (mm)

Description	Availability	DC	RE	APMX	DN	LU	DCON (h6)	LF	ZEFP	Shape
4QFRM030-090-03-R03-H	●	3.0	0.3	9.0	-	-	3.0	40.0	4	Fig. 2
4QFRM030-090-03-R05-H	●	3.0	0.5	9.0	-	-	3.0	40.0	4	Fig. 2
4QFRM030-090-06-R03-H	●	3.0	0.3	9.0	3.0	11.0	6.0	50.0	4	Fig. 1
4QFRM030-090-06-R05-H	●	3.0	0.5	9.0	3.0	11.0	6.0	50.0	4	Fig. 1
4QFRM040-120-04-R03-H	●	4.0	0.3	12.0	-	-	4.0	50.0	4	Fig. 2
4QFRM040-120-04-R05-H	●	4.0	0.5	12.0	-	-	4.0	50.0	4	Fig. 2
4QFRM040-120-06-R03-H	●	4.0	0.3	12.0	4.0	14.0	6.0	50.0	4	Fig. 1
4QFRM040-120-06-R05-H	●	4.0	0.5	12.0	4.0	14.0	6.0	50.0	4	Fig. 1
4QFRM050-150-06-R03-H	●	5.0	0.3	15.0	5.0	17.0	6.0	50.0	4	Fig. 1
4QFRM050-150-06-R05-H	●	5.0	0.5	15.0	5.0	17.0	6.0	50.0	4	Fig. 1
4QFRM060-160-06-R03-H	●	6.0	0.3	16.0	-	-	6.0	50.0	4	Fig. 2
4QFRM060-160-06-R05-H	●	6.0	0.5	16.0	-	-	6.0	50.0	4	Fig. 2
4QFRM060-160-06-R10-H	●	6.0	1.0	16.0	-	-	6.0	50.0	4	Fig. 2
4QFRM080-200-08-R03-H	●	8.0	0.3	20.0	-	-	8.0	64.0	4	Fig. 2
4QFRM080-200-08-R05-H	●	8.0	0.5	20.0	-	-	8.0	64.0	4	Fig. 2
4QFRM080-200-08-R10-H	●	8.0	1.0	20.0	-	-	8.0	64.0	4	Fig. 2
4QFRM080-200-08-R20-H	●	8.0	2.0	20.0	-	-	8.0	64.0	4	Fig. 2
4QFRM100-220-10-R05-H	●	10.0	0.5	22.0	-	-	10.0	70.0	4	Fig. 2
4QFRM100-220-10-R10-H	●	10.0	1.0	22.0	-	-	10.0	70.0	4	Fig. 2
4QFRM100-220-10-R15-H	●	10.0	1.5	22.0	-	-	10.0	70.0	4	Fig. 2
4QFRM100-220-10-R20-H	●	10.0	2.0	22.0	-	-	10.0	70.0	4	Fig. 2
4QFRM120-250-12-R05-H	●	12.0	0.5	25.0	-	-	12.0	75.0	4	Fig. 2
4QFRM120-250-12-R10-H	●	12.0	1.0	25.0	-	-	12.0	75.0	4	Fig. 2
4QFRM120-250-12-R20-H	●	12.0	2.0	25.0	-	-	12.0	75.0	4	Fig. 2
4QFRM120-250-12-R30-H	●	12.0	3.0	25.0	-	-	12.0	75.0	4	Fig. 2
4QFRM160-320-16-R10-H	●	16.0	1.0	32.0	-	-	16.0	90.0	4	Fig. 2
4QFRM160-320-16-R20-H	●	16.0	2.0	32.0	-	-	16.0	90.0	4	Fig. 2
4QFRM160-320-16-R30-H	●	16.0	3.0	32.0	-	-	16.0	90.0	4	Fig. 2
4QFRM200-380-20-R10-H	●	20.0	1.0	38.0	-	-	20.0	100.0	4	Fig. 2
4QFRM200-380-20-R20-H	●	20.0	2.0	38.0	-	-	20.0	100.0	4	Fig. 2
4QFRM200-380-20-R30-H	●	20.0	3.0	38.0	-	-	20.0	100.0	4	Fig. 2

Cutting conditions

2QFSM

Application	Workpiece	D. o. C. (ap×ae)(mm)	Dc (mm)	ø3	ø4	ø5	ø6	ø8	ø10	ø12	ø16	ø20
Shouldering	Carbon steel	0.80 Dc × 0.45 Dc	Revolution [min-1]	11,671	8,754	7,003	5,836	4,377	3,501	2,918	2,188	1,751
			Table feed [mm/min]	444	455	476	502	525	546	566	613	655
	Stainless steel	0.70 Dc × 0.45 Dc	Revolution [min-1]	8,488	6,366	5,093	4,244	3,183	2,546	2,122	1,592	1,273
			Table feed [mm/min]	306	331	357	382	407	433	458	509	560
	Grey cast iron	0.80 Dc × 0.45 Dc	Revolution [min-1]	11,671	8,754	7,003	5,836	4,377	3,501	2,918	2,188	1,751
			Table feed [mm/min]	444	455	476	502	525	546	566	613	655
	Ductile cast iron	0.65 Dc × 0.45 Dc	Revolution [min-1]	7,427	5,570	4,456	3,714	2,785	2,228	1,857	1,393	1,114
			Table feed [mm/min]	208	234	258	290	318	343	368	423	479
	Titanium alloy	0.80 Dc × 0.45 Dc	Revolution [min-1]	6,366	4,775	3,820	3,183	2,387	1,910	1,592	1,194	955
			Table feed [mm/min]	229	258	290	312	344	371	398	451	506
	Non ferrous metal	0.85 Dc × 0.45 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	509	535	570	594	611	642	671	719	769
Slotting	Carbon steel	0.60 Dc × 1.00 Dc	Revolution [min-1]	11,671	8,754	7,003	5,836	4,377	3,501	2,918	2,188	1,751
			Table feed [mm/min]	257	280	280	303	315	329	338	368	396
	Stainless steel	0.50 Dc × 1.00 Dc	Revolution [min-1]	8,488	6,366	5,093	4,244	3,183	2,546	2,122	1,592	1,273
			Table feed [mm/min]	187	204	224	238	255	270	289	321	351
	Grey cast iron	0.60 Dc × 1.00 Dc	Revolution [min-1]	11,671	8,754	7,003	5,836	4,377	3,501	2,918	2,188	1,751
			Table feed [mm/min]	257	280	280	303	315	329	338	368	396
	Ductile cast iron	0.55 Dc × 1.00 Dc	Revolution [min-1]	7,427	5,570	4,456	3,714	2,785	2,228	1,857	1,393	1,114
			Table feed [mm/min]	104	123	134	156	167	183	197	226	254
	Titanium alloy	0.45 Dc × 1.00 Dc	Revolution [min-1]	6,366	4,775	3,820	3,183	2,387	1,910	1,592	1,194	955
			Table feed [mm/min]	153	172	183	204	224	241	258	294	328
	Non ferrous metal	0.65 Dc × 1.00 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	306	306	326	340	357	377	390	420	453

3QFSM

Application	Workpiece	D. o. C. (ap×ae)(mm)	Dc (mm)	ø3	ø4	ø5	ø6	ø8	ø10	ø12	ø16	ø20
Shouldering	Carbon steel	0.80 Dc × 0.45 Dc	Revolution [min-1]	11,671	8,754	7,003	5,836	4,377	3,501	2,918	2,188	1,751
			Table feed [mm/min]	665	683	714	753	788	819	849	919	982
	Stainless steel	0.70 Dc × 0.45 Dc	Revolution [min-1]	8,488	6,366	5,093	4,244	3,183	2,546	2,122	1,592	1,273
			Table feed [mm/min]	458	497	535	573	611	649	688	764	840
	Grey cast iron	0.80 Dc × 0.45 Dc	Revolution [min-1]	11,671	8,754	7,003	5,836	4,377	3,501	2,918	2,188	1,751
			Table feed [mm/min]	665	683	714	753	788	819	849	919	982
	Ductile cast iron	0.65 Dc × 0.45 Dc	Revolution [min-1]	7,427	5,570	4,456	3,714	2,785	2,228	1,857	1,393	1,114
			Table feed [mm/min]	312	351	388	434	476	515	551	635	719
	Titanium alloy	0.80 Dc × 0.45 Dc	Revolution [min-1]	6,366	4,775	3,820	3,183	2,387	1,910	1,592	1,194	955
			Table feed [mm/min]	344	387	435	468	516	556	597	677	759
	Non ferrous metal	0.85 Dc × 0.45 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	764	802	856	891	917	963	1,006	1,079	1,154
Slotting	Carbon steel	0.60 Dc × 1.00 Dc	Revolution [min-1]	11,671	8,754	7,003	5,836	4,377	3,501	2,918	2,188	1,751
			Table feed [mm/min]	385	420	420	455	473	494	508	551	593
	Stainless steel	0.50 Dc × 1.00 Dc	Revolution [min-1]	8,488	6,366	5,093	4,244	3,183	2,546	2,122	1,592	1,273
			Table feed [mm/min]	280	306	336	357	382	405	433	482	527
	Grey cast iron	0.60 Dc × 1.00 Dc	Revolution [min-1]	11,671	8,754	7,003	5,836	4,377	3,501	2,918	2,188	1,751
			Table feed [mm/min]	385	420	420	455	473	494	508	551	593
	Ductile cast iron	0.55 Dc × 1.00 Dc	Revolution [min-1]	7,427	5,570	4,456	3,714	2,785	2,228	1,857	1,393	1,114
			Table feed [mm/min]	156	184	201	234	251	274	295	338	381
	Titanium alloy	0.45 Dc × 1.00 Dc	Revolution [min-1]	6,366	4,775	3,820	3,183	2,387	1,910	1,592	1,194	955
			Table feed [mm/min]	229	258	275	306	337	361	387	440	493
	Non ferrous metal	0.65 Dc × 1.00 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	458	458	489	509	535	565	586	630	680

Cutting conditions

4QFSM-VG / 4QFRM-VGL

Application	Workpiece	D. α. C. (ap×ae)(mm)	Dc (mm)	ø3	ø4	ø5	ø6	ø8	ø10	ø12	ø16	ø20
Shouldering	Carbon steel	1.15 Dc × 0.30 Dc	Revolution [min-1]	21,221	15,915	12,732	10,610	7,958	6,366	5,305	3,979	3,183
			Table feed [mm/min]	764	828	866	849	891	891	955	1,003	1,044
	Alloy steel 520 < Rm < 1200	1.00 Dc × 0.30 Dc	Revolution [min-1]	19,629	14,722	11,777	9,815	7,361	5,889	4,907	3,680	2,944
			Table feed [mm/min]	1,413	1,590	1,602	1,610	1,796	1,790	2,002	2,105	2,202
	Prehardened steel 35 ≤ HRC < 45	1.00 Dc × 0.30 Dc	Revolution [min-1]	14,854	11,141	8,913	7,427	5,570	4,456	3,714	2,785	2,228
			Table feed [mm/min]	1,010	980	1,105	1,099	1,248	1,248	1,396	1,549	1,649
	Stainless steel (high machinability)	1.00 Dc × 0.30 Dc	Revolution [min-1]	10,610	7,958	6,366	5,305	3,979	3,183	2,653	1,989	1,592
			Table feed [mm/min]	297	286	357	340	382	382	403	454	547
	Stainless steel (low machinability)	0.70 Dc × 0.30 Dc	Revolution [min-1]	5,305	3,979	3,183	2,653	1,989	1,592	1,326	995	796
			Table feed [mm/min]	170	159	166	170	183	178	202	219	239
	Grey cast iron	1.00 Dc × 0.30 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098
Slotting	Carbon steel	0.60 Dc × 1.00 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098
	Alloy steel 520 < Rm < 1200	0.50 Dc × 1.00 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098
	Prehardened steel 35 ≤ HRC < 45	0.50 Dc × 1.00 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098
	Stainless steel (high machinability)	0.50 Dc × 1.00 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098
	Stainless steel (low machinability)	0.30 Dc × 1.00 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098
	Grey cast iron	0.60 Dc × 1.00 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098
	Titanium alloy	0.30 Dc × 1.00 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098
	Wrought aluminum Si < 9%	0.80 Dc × 0.30 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098
	Cast aluminum Si ≥ 9%	1.10 Dc × 0.30 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366	5,093	4,244	3,183	2,546
			Table feed [mm/min]	1,630	1,630	1,711	1,698	1,808	1,793	1,867	1,948	2,098

4QFSM-VE / 4QFRM-VE

Application	Workpiece	D. α. C. (ap×ae)(mm)	Dc (mm)	ø3	ø4	ø5	ø6	ø8	ø10	ø12	ø16	ø20
Shouldering	Carbon steel	0.80 Dc × 0.45 Dc	Revolution [min-1]	14,854	11,141	8,913	7,427	5,570	4,456	3,714	2,785	2,228
			Table feed [mm/min]	1,070	1,159	1,176	1,248	1,315	1,355	1,411	1,526	1,640
	Alloy steel 520 < Rm < 1200	0.80 Dc × 0.45 Dc	Revolution [min-1]	13,793	10,345	8,276	6,897	5,173	4,138	3,448	2,586	2,069
			Table feed [mm/min]	1,214	1,283	1,324	1,379	1,448	1,506	1,559	1,666	1,779
	Prehardened steel 35 ≤ HRC < 45	0.75 Dc × 0.45 Dc	Revolution [min-1]	12,732	9,549	7,639	6,366	4,775	3,820	3,183	2,387	1,910
			Table feed [mm/min]	917	993	1,039	1,095	1,165	1,222	1,273	1,394	1,513
	Stainless steel (high machinability)	0.70 Dc × 0.45 Dc	Revolution [min-1]	10,610	7,958	6,366	5,305	3,979	3,183	2,653	1,989	1,592
			Table feed [mm/min]	764	828	891	955	1,019	1,082	1,146	1,273	1,401
	Stainless steel (low machinability)	0.65 Dc × 0.45 Dc	Revolution [min-1]	6,366	4,775	3,820	3,183	2,387	1,910	1,592	1,194	955
			Table feed [mm/min]	484	554	611	688	754	817	891	1,027	1,161
	Grey cast iron	0.80 Dc × 0.45 Dc	Revolution [min-1]	14,854	11,141	8,913	7,427	5,570	4,456	3,714	2,785	2,228
			Table feed [mm/min]	1,070	1,159	1,176	1,248	1,315	1,355	1,411	1,526	1,640
Slotting	Ductile cast iron	0.65 Dc × 0.45 Dc	Revolution [min-1]	9,549	7,162	5,730	4,775	3,581	2,865	2,387	1,790	1,432
			Table feed [mm/min]	497	573	642	726	788	859	926	1,060	1,197
	Titanium alloy	0.65 Dc × 0.45 Dc	Revolution [min-1]	7,427	5,570	4,456	3,714	2,785	2,228	1,857	1,393	1,114
			Table feed [mm/min]	594	646	713	787	858	927	988	1,131	1,266
	Carbon steel	0.60 Dc × 1.00 Dc	Revolution [min-1]	14,854	11,141	8,913	7,427	5,570	4,456	3,714	2,785	2,228
			Table feed [mm/min]	654	668	713	743	780	820	847	914	980
	Alloy steel 520 < Rm < 1200	0.60 Dc × 1.00 Dc	Revolution [min-1]	13,793	10,345	8,276	6,897	5,173	4,138	3,448	2,586	2,069
			Table feed [mm/min]	717	786	795	828	869	894	938	1,003	1,068
	Prehardened steel 35 ≤ HRC < 45	0.55 Dc × 1.00 Dc	Revolution [min-1]	12,732	9,549	7,639	6,366	4,775	3,820	3,183	2,387	1,910
			Table feed [mm/min]	560	611	642	662	707	749	777	859	924
	Stainless steel (high machinability)	0.50 Dc × 1.00 Dc	Revolution [min-1]	10,610	7,958	6,366	5,305	3,979	3,183	2,653	1,989	1,592
			Table feed [mm/min]	467	509	560	594	637	675	722	804	879
	Stainless steel (low machinability)	0.45 Dc × 1.00 Dc	Revolution [min-1]	6,366	4,775	3,820	3,183	2,387	1,910	1,592	1,194	955
			Table feed [mm/min]	306	363	397	446	487	535	579	668	756
	Grey cast iron	0.60 Dc × 1.00 Dc	Revolution [min-1]	14,854	11,141	8,913	7,427	5,570	4,456	3,714	2,785	2,228
			Table feed [mm/min]	654	668	713	743	780	820	847	914	980
	Ductile cast iron	0.45 Dc × 1.00 Dc	Revolution [min-1]	9,549	7,162	5,730	4,775	3,581	2,865	2,387	1,790	1,432
			Table feed [mm/min]	344	372	413	458	516	561	602	688	779
	Titanium alloy	0.45 Dc × 1.00 Dc	Revolution [min-1]	7,427	5,570	4,456	3,714	2,785	2,228	1,857	1,393	1,114
			Table feed [mm/min]	386	423	463	505	557	597	646	735	820

Cutting conditions

5QFRM-VE

Application	Workpiece	D. o. C. (ap×ae)(mm)	Dc (mm)	ø6	ø8	ø10	ø12	ø16	ø20
Shouldering	Carbon steel	0.80 Dc × 0.45 Dc	Revolution [min-1]	7,427	5,570	4,456	3,714	2,785	2,228
			Table feed [mm/min]	1,560	1,643	1,693	1,764	1,908	2,050
	Alloy steel 520 < Rm < 1200	0.80 Dc × 0.45 Dc	Revolution [min-1]	6,897	5,173	4,138	3,448	2,586	2,069
			Table feed [mm/min]	1,724	1,810	1,883	1,948	2,082	2,224
	Prehardened steel 35 ≤ HRC < 45	0.75 Dc × 0.45 Dc	Revolution [min-1]	6,366	4,775	3,820	3,183	2,387	1,910
			Table feed [mm/min]	1,369	1,456	1,528	1,592	1,743	1,891
	Stainless steel (high machinability)	0.70 Dc × 0.45 Dc	Revolution [min-1]	5,040	3,780	3,024	2,520	1,890	1,512
			Table feed [mm/min]	1,184	1,266	1,346	1,424	1,588	1,746
	Stainless steel (low machinability)	0.65 Dc × 0.45 Dc	Revolution [min-1]	2,653	1,989	1,592	1,326	995	796
			Table feed [mm/min]	849	945	1,027	1,114	1,283	1,452
	Grey cast iron	0.80 Dc × 0.45 Dc	Revolution [min-1]	7,427	5,570	4,456	3,714	2,785	2,228
			Table feed [mm/min]	1,560	1,643	1,693	1,764	1,908	2,050
Trochoidal	Carbon steel	1.50 Dc × 0.12 Dc	Revolution [min-1]	5,305	3,979	3,183	2,653	1,989	1,592
			Table feed [mm/min]	902	975	1,066	1,154	1,323	1,496
	Alloy steel 520 < Rm < 1200	1.50 Dc × 0.12 Dc	Revolution [min-1]	3,183	2,387	1,910	1,592	1,194	955
			Table feed [mm/min]	987	1,074	1,155	1,241	1,409	1,580
	Prehardened steel 35 ≤ HRC < 45	1.50 Dc × 0.12 Dc	Revolution [min-1]	13,263	9,947	7,958	6,631	4,974	3,979
			Table feed [mm/min]	3,183	3,183	3,183	3,183	3,183	3,183
	Stainless steel (high machinability)	1.50 Dc × 0.12 Dc	Revolution [min-1]	11,671	8,754	7,003	5,836	4,377	3,501
			Table feed [mm/min]	2,451	2,451	2,451	2,451	2,451	2,451
	Stainless steel (low machinability)	1.50 Dc × 0.12 Dc	Revolution [min-1]	10,610	7,958	6,366	5,305	3,979	3,183
			Table feed [mm/min]	1,592	1,592	1,592	1,592	1,592	1,592
	Grey cast iron	1.50 Dc × 0.12 Dc	Revolution [min-1]	5,305	3,979	3,183	2,653	1,989	1,592
			Table feed [mm/min]	637	637	637	637	637	637
	Ductile cast iron	1.50 Dc × 0.12 Dc	Revolution [min-1]	4,775	3,581	2,865	2,387	1,790	1,432
			Table feed [mm/min]	573	573	573	573	573	573
	Titanium alloy	1.50 Dc × 0.12 Dc	Revolution [min-1]	10,610	7,958	6,366	5,305	3,979	3,183
			Table feed [mm/min]	2,228	2,228	2,228	2,228	2,228	2,228
	Grey cast iron	1.50 Dc × 0.12 Dc	Revolution [min-1]	7,427	5,570	4,456	3,714	2,785	2,228
			Table feed [mm/min]	1,114	1,114	1,114	1,114	1,114	1,114
	Ductile cast iron	1.50 Dc × 0.12 Dc	Revolution [min-1]	4,775	3,581	2,865	2,387	1,790	1,432
			Table feed [mm/min]	573	573	573	573	573	573

5QECL-VTL

Application	Workpiece	D. o. C. (ap×ae)(mm)	Dc (mm)	ø6	ø8	ø10	ø12	ø16
Shouldering	Carbon steel	1.00 Dc × 0.25 Dc	Revolution [min-1]	15,650	11,738	9,390	7,825	5,869
			Table feed [mm/min]	3,365	3,521	3,662	3,795	3,580
	Alloy steel 520 < Rm < 1200	1.00 Dc × 0.20 Dc	Revolution [min-1]	13,263	9,947	7,958	6,631	4,974
			Table feed [mm/min]	2,454	2,536	2,666	2,752	2,611
	Stainless steel (high machinability)	1.00 Dc × 0.18 Dc	Revolution [min-1]	10,876	8,157	6,525	5,438	4,078
			Table feed [mm/min]	2,012	2,121	2,219	2,338	2,182
	Grey cast iron	1.00 Dc × 0.25 Dc	Revolution [min-1]	14,324	10,743	8,594	7,162	5,371
			Table feed [mm/min]	3,080	3,223	3,395	3,509	3,303
	Titanium alloy	1.00 Dc × 0.15 Dc	Revolution [min-1]	5,570	4,178	3,342	2,785	2,089
			Table feed [mm/min]	1,198	1,274	1,354	1,462	1,337
Trochoidal	Carbon steel	2.00 Dc × 0.09 Dc	Revolution [min-1]	18,303	13,727	10,982	9,151	6,684
			Table feed [mm/min]	3,935	4,118	4,283	4,438	4,221
	Alloy steel 520 < Rm < 1200	2.00 Dc × 0.09 Dc	Revolution [min-1]	15,560	11,738	9,390	7,825	5,869
			Table feed [mm/min]	2,895	2,993	3,146	3,247	3,081
	Stainless steel (high machinability)	2.00 Dc × 0.09 Dc	Revolution [min-1]	12,732	9,549	7,639	6,366	4,775
			Table feed [mm/min]	2,292	2,435	2,597	2,737	2,531
	Grey cast iron	2.00 Dc × 0.09 Dc	Revolution [min-1]	16,977	12,732	10,186	8,488	6,366
			Table feed [mm/min]	3,565	3,756	3,922	4,074	3,820
	Titanium alloy	2.00 Dc × 0.09 Dc	Revolution [min-1]	6,631	4,974	3,979	3,316	2,487
			Table feed [mm/min]	1,426	1,542	1,671	1,757	1,617

4QFSM-H / 4QFRM-H

Application	Workpiece	D. o. C. (ap×ae)(mm)	Dc (mm)	ø3	ø4	ø5	ø6	ø8	ø10	ø12	ø16	ø20
Shouldering	Hard material 45 ≤ HRC < 52	0.40 Dc × 0.30 Dc	Revolution [min-1]	6,366	4,775	3,820	3,183	2,387	1,910	1,592	1,194	955
			Table feed [mm/min]	993	1,165	1,115	1,159	1,060	1,001	1,063	979	1,001
	Hard material 52 ≤ HRC ≤ 68	0.30 Dc × 0.30 Dc	Revolution [min-1]	5,305	3,979	3,183	2,653	1,989	1,592	1,326	995	796
			Table feed [mm/min]	891	955	1,019	1,061	963	898	960	879	901
Slotting	Hard material 45 ≤ HRC < 52	0.12 Dc × 1.00 Dc	Revolution [min-1]	5,836	4,377	3,501	2,918	2,188	1,751	1,459	1,094	875
			Table feed [mm/min]	607	665	616	665	560	497	560	481	501
	Hard material 52 ≤ HRC ≤ 68	0.09 Dc × 1.00 Dc	Revolution [min-1]	4,775	3,581	2,865	2,387	1,790	1,432	1,194	895	716
			Table feed [mm/min]	248	244	309	344	322	258	301	251	281

KDA Applicable to a wide range of machining applications

Type N

General purpose design without coolant holes.
Economical style for machining with external coolant.

Type C

Coolant-through design
Provides higher efficiency and stable machining with stainless steel etc.



DRXR MagicDrill Less vibration and excellent chip evacuation

High efficiency indexable drill with three types of chipbreakers for various applications



GM

for general purpose



SM

for stainless steel and low carbon steel



GH

for hard material, with interruption

