

CUTTING TOOLS


CERAMIC | CERMET | PCBN/PCD | TOOL HOLDER | MILLING CUTTER



SPEEDY SOLUTION!!



Ceramic
A22



Cermet
A84



PCBN/PCD
A108



Tool Hoder
A138



Milling Cutter
A188

High Speed!

High Quality!

High Performance!



INTRODUCTION

Union Materials Corporation has accumulated technologies and experiences over 40 years through developing and manufacturing various high-tech materials. Including hard ferrite magnets which are awarded Best Supplier from Robert Bosch GmbH for seven times consecutively in last 18 years, Union Materials Corporation manufactures various ceramic-based parts, cutting tools and industrial ceramics for automotive, electrical & electronic engineering and machinery industry.

Union cutting tool products are advanced materials developed with high technologies through long-term experiences, continuous studies and applications to commercialization of new materials. We have attained many great achievements in the field of various cutting tools for automotive, steel mill, aerospace and machinery field.

As of March 14 2017, Union Corporation has been the largest shareholder of Union Materials Corporation. We started new era with new company name, Union Materials Corporation since September 28, 2017 in accordance with the change of major shareholder which was originally Ssangyong Cement to Union Corporation.

Union Materials Corporation firmly promises to engage in its current business activities and will endeavor to support our customers for satisfaction.

CONTENTS



GRADE INFORMATION

A1 - A21

TURNING & MILLING

A22 - A293

INDEX

A37 - A309



Seoul HQ Office



Daegu plant



TURNING & MILLING

INSERT

Grade Information	A4
Application Index	A14
Identification System	A18
Ceramic	A24
- Turning / Roll Turning	
- Grooving	
- Milling / Wiper	
- Special	
Cermet	A86
- Turning	
- Milling	
- Special	
PCBN / PCD	A110
- PCBN	
- PCD	
- Special	

TOOL HOLDER

Application Index	A 140
Identification System	A 142
External Toolholder	A 144
Special	A 181

MILLING CUTTER

Application Index	A 190
Face Milling Cutter	A 192
Ball Endmill	A 232
Chamfer Cutter	A 234
Aluminum Cutter	A 237
Special	A 246

TECHNICAL DATA

Test Results	A 290
Trouble Shooting	A 293
Hardness Conversion Table	A 294
Grade Comparison	A 297
Comparison of Work-piece	A 298

GRADE INFORMATION

CERAMIC

SiC-Whisker	SW400	High Speed Steel, High Chrome Steel in medium or low speed cutting. Roughing and medium cutting with heavy interruption
	SW800	Nickel Base Alloy, Cobalt base Alloy in high speed cutting. Roughing and medium cutting with continuous or light interruption.
	WT400	AlTiN/TiN coated on SW400 grade
	WT800	AlTiN/TiN coated on SW800 grade
AlTiN/TiN Coating	WT400	AlTiN/TiN coated on SW400 grade
	WT800	AlTiN/TiN coated on SW800 grade
Al ₂ O ₃ +TiC(N)	ST100	Finishing for steel and cast iron
	ST300	General machining for steel and cast iron
	ST500	Fine finishing for hardened steel and cast iron
	ST900	Fine finishing for hardened steel and cast iron in high speed
	TC100	TiN coated on ST100 grade
	TC300	TiN coated on ST300 grade
	TC900	TiN coated on ST900 grade
	TM300	AlTiN coated on ST300 grade
	TM300	AlTiN coated on ST300 grade
	TM300	AlTiN coated on ST300 grade
TiC+Al ₂ O ₃	SD200	Turning & Milling for ductile cast iron
Al ₂ O ₃ +ZrO ₂	SZ200	Medium cutting for cast iron and steel
	SZ300	Medium cutting for hardened cast iron
Si ₃ N ₄	SN26	Roughing for cast iron with interruption
	SN300	Roughing for cast iron with heavy interruption
	SN400	General machining for cast iron
	SN500	Roughing for cast iron in high speed
	SN600	Roughing for cast iron with interrupted in high speed
	SN800 (SiAlON)	General machining for Ni-based alloy and cast iron (Dry)
	SN950 (SiAlON)	General machining for Ni & Co-based alloy (Wet/Dry)
	SN1000 (SiAlON)	General machining for Ni & Co-based alloy and cast iron
	NC400	AlTiN/TiN coated on SN400 grade
	NC600	AlTiN/TiN coated on SN600 grade
	NC1000	AlTiN/TiN coated on SN1000 grade
AlTiN/TiN Coating	NC400	AlTiN/TiN coated on SN400 grade
	NC600	AlTiN/TiN coated on SN600 grade
	NC1000	AlTiN/TiN coated on SN1000 grade

CERMET

TiCN	TX515 (TX915)	Finishing and boring for carbon steel and alloy steel (TiN Coated on TX515 grade)
	TX520 (TX920)	General machining and bearing for steel (TiN Coated on TX520 grade)
	TX530 (TX930)	General application for milling (TiN Coated on TX530 grade)

CARBIDE


WC, PVD coating	UW100	Finishing & medium cutting of super alloy
-----------------	-------	---

PCBN/PCD


PCBN	SBN1000 (SBC1000)	Medium and finishing for cast iron (AlTiN/TiSiN Coated on SBN1000)
	SBN2000 (SBC2000)	Continuous cutting for hardened steel (AlTiN/TiSiN Coated on SBN2000)
	SBN3000 (SBC3000)	Moderately interrupted turning and finishing milling for steel (AlTiN/TiSiN Coated on SBN3000)
	SBN4000 (SBC4000)	Heavy interrupted cutting of hardened steel (AlTiN/TiSiN Coated on SBN4000)
	SBN5000 (SBC5000)	Solid PCBN for cast iron (AlTiN/TiSiN Coated on SBN5000)
PCD	SPD1000	Machining for extremely abrasive materials (plastic composites)
	SPD2000	General machining for aluminum alloys and copper
	SPD3000	Machining for aluminum alloys(>11% Si) and sintered carbide
	SPD4000	Machining for CFRP and aluminum alloys (Si 18~21%)

GRADE INFORMATION

Application Range

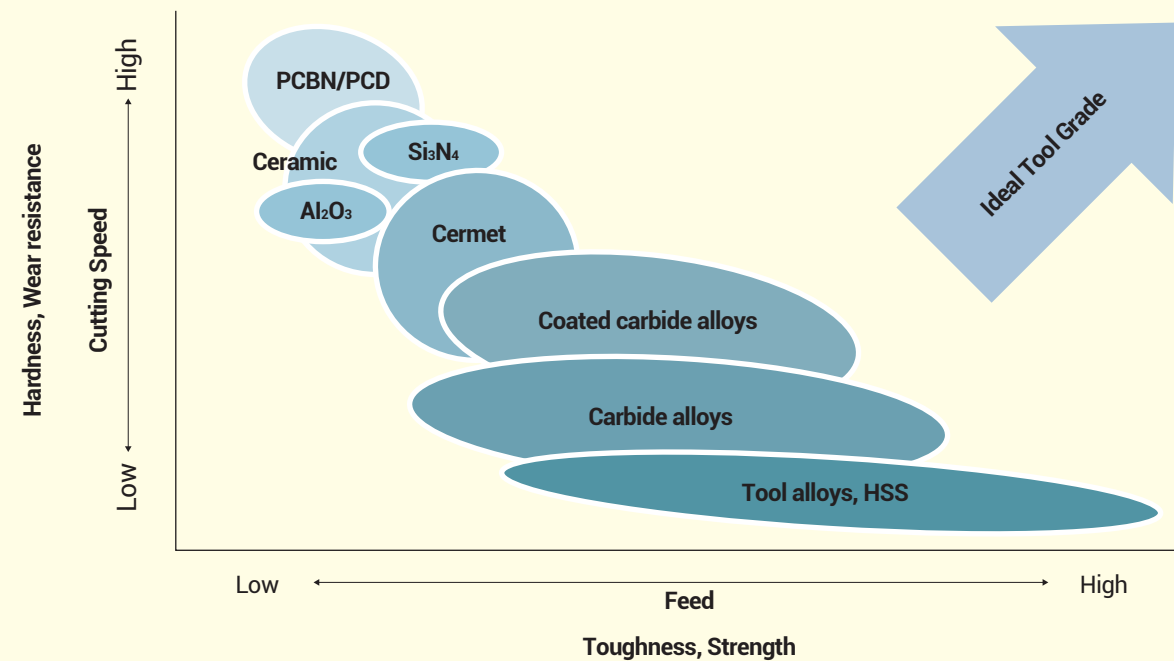

Mechanical Properties

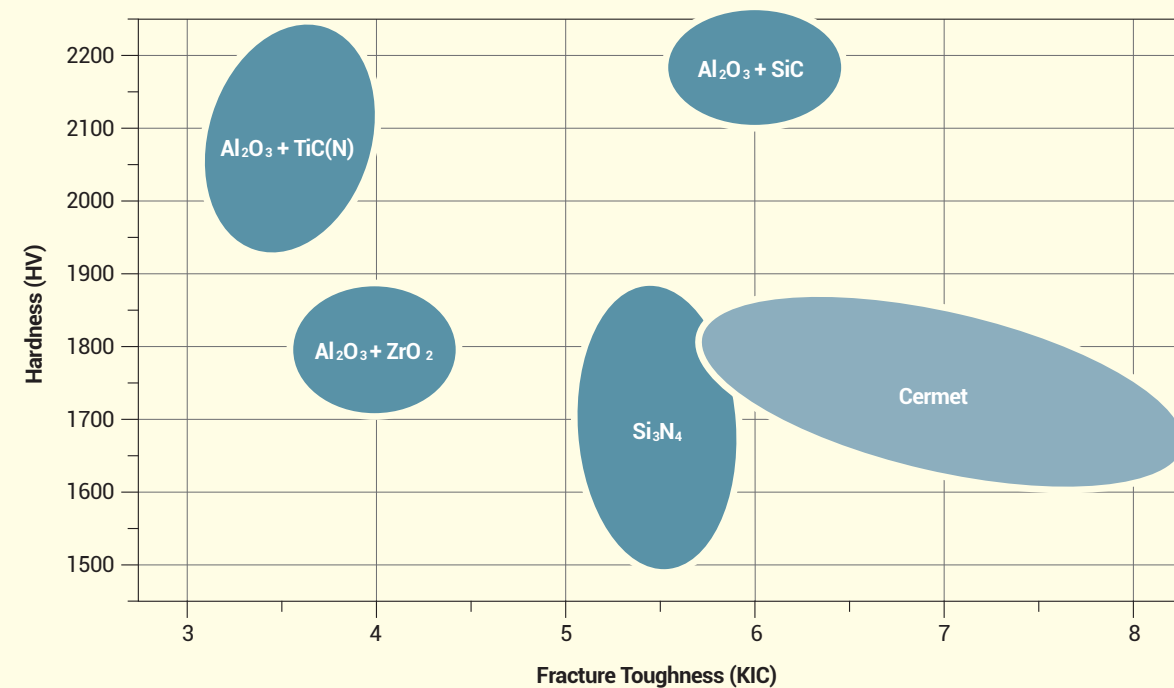

CERAMIC

Union Ceramics take pride in its outstanding wear resistance and thermal shock resistance with high speed cutting. Pure raw materials give stability and fine microstructure to the products. Through proper or optimum process, shaped bodies are completely condensed so that finished goods are strong and resistant against fracture and wear.

- Improved work efficiency by increasing cutting speed on extremely higher than carbide inserts.
- Longer tool life through excellent wear resistance
- Precise cutting and superior surface roughness

	Whisker	SW400	Excellent flank & Notch wear in high speed cutting Al_2O_3+SiC	High Speed Steel, High Chrome Steel in medium or low speed cutting Roughing and medium cutting with heavy interruption	 Tougher Harder
		SW800	Excellent flank & Notch wear in high speed cutting Al_2O_3+SiC	Nickel Base Alloy, Cobalt Base Alloy in high speed cutting Roughing and finishing with continuous or light interruption	
		WT400	Improved notch wear resistance & tool life $AlTiN+TiN$ multi coating on SW400	High Speed Steel & High Chrome Steel Roughing and medium cutting with heavy interruption	
		WT800	Improved notch wear resistance & tool life $AlTiN+TiN$ multi coating on SW800	Nickel Base Alloy & Cobalt Base Alloys Roughing and finishing with light interruption	
	Al_2O_3 Series	ST100	Tougher than ST300 High thermal shock resistance Al_2O_3+TiC	Universal grade for machining cast iron and steel	 Tougher Harder
		ST300	Excellent wear resistance Al_2O_3+TiCN	A basic choice for machining steel and cast iron	
		ST500	Alternative to PCBN, Fine microstructure Al_2O_3+TiCN	Fine finishing for hardened steel and cast iron	
		ST900	Excellent wear and thermal shock resistance Al_2O_3+TiCN	Fine finishing for hardened steel and cast iron in high speed	
		TC100	Good wear resistance TiN coating on ST100	Finishing for steel and cast iron	
		TC300	Excellent wear resistance TiN coating on ST300	Finishing for steel and cast iron	
		TC900	Excellent wear resistance TiN coating on ST900	Finishing for hardened steel and cast iron	
		TM300	Excellent wear resistance & thermal shock resistance $AlTiN$ coating on ST300	Finishing for steel and cast iron	
	ZrO_2 Series	SD200	High thermal shock resistance, Usable with coolant $TiC+Al_2O_3$	Machining ductile cast iron Finishing for ductile cast iron and hard materials	Finishing for ductile cast iron
		SZ200	Toughened by zirconia, High chemical stability $Al_2O_3+ZrO_2$	Finishing, semi-finishing of cast iron and steel	Tougher
	Si_3N_4 Series	SZ300	Harder alternative to SZ200 $Al_2O_3+ZrO_2$	Finishing, semi-finishing of cast iron and steel	Harder
		SN26	Good toughness and thermal shock resistance Well balanced wear resistance and toughness Si_3N_4	First choice for roughing with interrupted cuts Roll turning and milling of cast iron and steel	Roughing in lower speed
		SN300	Tougher alternative to SN400 Good toughness and thermal shock resistance Si_3N_4	Roughing and high speed cutting with interruption	Tougher
		SN400	Excellent wear resistance in high speed cutting Si_3N_4	Frist choice for roughing of cast iron High speed machining with interrupted cuts	Harder
		SN500	Harder alternative to SN400 Improved wear resistance at hugh speed cutting Si_3N_4	High speed roughing for cast iron	
		SN600	Excellent wear resistance in interrupted cutting Si_3N_4	Roughing for cast iron with interruption and high speed	Tougher
		NC400	Excellent wear resistance & thermal shock resistance $AlTiN+TiN$ multi coating on SN400	Cast iron in roughing and semi-finishing cutting	Harder
		NC600	Excellent wear resistance & thermal shock resistance $AlTiN+TiN$ multi coating on SN600	Cast iron in roughing and semi-finishing cutting	Harder
	$SiAlON$ Series	SN800	Excellent wear resistance $SiAlON$	In Dry cutting condition, great performance against notch wear Machining for steel and HRSA materials in high speed	
		SN950	Excellent strength and wear resistance $SiAlON$	Great performance for roughing & finishing A basic choice for machining HRSA materials	
		SN1000	Excellent thermal shock resistance and wear resistance $SiAlON$	Medium or low speed cutting of HRSA materials and cast iron Roughing and medium cutting with heavy interruption	
		NC1000	Excellent thermal shock resistance and wear resistance $AlTiN+TiN$ multi coating on SN1000	Medium or low speed cutting of HRSA materials and cast iron Roughing and medium cutting with heavy interruption	

GRADE INFORMATION

Physical Properties

Grade	Coated	Composition	Color	Density (g/cm³)	Hardness (Hv)	Toughness (MPa·m ^{1/2})
SW400	WT400	Al ₂ O ₃ + SiC	Green	3.8	2,100	6.0
		(AlTiN+TiN)	Gold			
SW800	WT800	Al ₂ O ₃ + SiC	Green	3.7	2,100	6.5
		(AlTiN+TiN)	Gold			
ST100	TC100	Al ₂ O ₃ + TiC	Black	4.2	2,100	4.5
		(TiN)	Gold			
ST300	TC300 TM300	Al ₂ O ₃ + TiCN	Black	4.4	2,150	4.0
		(TiN)	Gold			
		(AlTiN)	Black			
ST500		Al ₂ O ₃ + TiCN	Black	4.3	2,200	4.0
ST900	TC900	Al ₂ O ₃ + TiCN	Black	4.3	2,200	4.5
		(TiN)	Gold			
SD200		TiC + Al ₂ O ₃	Black	4.6	2,250	5.0
SZ200		Al ₂ O ₃ + ZrO ₂	White	4.1	1,800	4.5
SZ300		Al ₂ O ₃ + ZrO ₂	Pink	4.1	1,850	4.0
SN26		Si ₃ N ₄	Black	3.3	1,600	6.0
SN300		Si ₃ N ₄	Gray	3.2	1,600	6.5
SN400	NC400	Si ₃ N ₄	Gray	3.2	1,650	6.5
		(AlTiN+TiN)	Gold			
SN500		Si ₃ N ₄	Gray	3.2	1,650	6.5
SN600	NC600	Si ₃ N ₄	Black	3.2	1,700	7.0
		(AlTiN+TiN)	Gold			
SN800		Si ₃ N ₄ + Al ₂ O ₃	Black	3.2	1,900	6.5
SN950		Si ₃ N ₄ + Al ₂ O ₃	Black	3.3	1,750	7.5
SN1000	NC1000	Si ₃ N ₄ + Al ₂ O ₃	Black	3.3	1,800	7.0
		(AlTiN+TiN)	Gold			

Choice of Ceramic Grade for Workpiece

Workpiece		ST100/ST300 TC100/TC300 TM300	ST500 ST900 TC900	SD200	SZ200 SZ300	SN26 SN300/SN400 SN500/SN600 NC400/NC600	SN800	SN950 SN1000 NC1000	SW400 WT400	SW800 WT800
Cast Iron	Gray cast iron	◎	○	○	◎	◎	◎	○		
	Chilled cast iron	○	○		○	○	◎	○		
	Ductile cast iron	○		◎		○	○	○		
Steel	Mild steel	○			○					
	Carbon steel	○			○					
	Alloy steel	◎	○		○		○	○	○	○
	Forged steel	○	◎							
	Heat treated steel	○	◎							
	High speed steel	○	◎						◎	○
	High manganese steel	○	○			○	○	○	◎	○
	Stainless steel									
	Heat resistant super alloy						○	◎	○	◎

◎ : Excellent ○ : Good

Choice of Ceramic Grade for Workpiece

Application	Grade	Workpiece		Machining Type	Speed (V) (m/min)	Feed (f) (mm/rev)	Depth (DOC) (mm)	
Turning	ST100 ST300 ST500 ST900 TC100 TC300 TC900 TM300	Gray Cast Iron	Gray Cast Iron (FC) Malleable (FCMB)	Rough Finish	150 ~ 800 200 ~ 1,200	0.2 ~ 0.5 0.3 ~ 0.5	3 ~ 6 0.1 ~ 0.5	
			Chilled Cast Iron	Rough Finish	30 ~ 100 50 ~ 200	0.1 ~ 0.2 0.05 ~ 0.15	0.5 ~ 1.5 0.1 ~ 0.5	
		Steel	Carbon Steel Alloy Steel Bearing Steel	Rough Finish	150 ~ 400 200 ~ 800	0.2 ~ 0.5 0.05 ~ 0.2	2 ~ 5 0.1 ~ 0.5	
			Hard Steel (HRC 45≥)	Rough Finish	20 ~ 100 40 ~ 200	0.1 ~ 0.2 0.05 ~ 0.5	0.5 ~ 1.5 0.1 ~ 0.5	
		SD200	Ductile Cast Iron Nodular Cast Iron		Rough Finish	100 ~ 400 200 ~ 800	0.1 ~ 0.2 0.05 ~ 0.25	1 ~ 2 0.1 ~ 0.5
		SZ200 SZ300	Gray Cast Iron (FC) Steel (HRC 45±)		Rough Finish	200 ~ 700 300 ~ 1,200	0.2 ~ 0.4 0.05 ~ 0.3	2 ~ 5 0.1 ~ 0.5
		SN26 SN300 SN400 SN500 SN600 NC400 NC600	Gray Cast Iron	Gray Cast Iron (FC) Malleable (FCMB)	Rough Finish	150 ~ 1,100 250 ~ 1,200	0.3 ~ 0.8 0.15 ~ 0.4	< 5 < 1
				Chilled Cast Iron	Rough Finish	20 ~ 100 60 ~ 200	1.0 ~ 2.0 0.5 ~ 1.0	< 5 < 1
	NEW SN800 SN950 SN1000	Ni-Based Alloy Non-Ferrous Metal Inconel		Rough Finish	150 ~ 250 150 ~ 450	0.2 ~ 0.4 0.1 ~ 0.2	< 5 < 1	
		SW400 SW800 WT400 WT800		High temperature alloys Inconel Stellite	Rough Finish	180 ~ 360 180 ~ 450	0.1 ~ 0.25 0.1 ~ 0.30	1 ~ 3 0.5 ~ 2.0
	Milling	SN26 SN300 SN400 SN500 SN600 NC400 NC600	Gray Cast Iron (FC)		Rough Finish	100 ~ 1,200 150 ~ 1,500	0.3 ~ 0.5 0.3 ~ 0.7	< 5 < 3
			Ductile Cast Iron Alloy Steel		Rough Finish	90 ~ 500 100 ~ 700	0.1 ~ 0.3 0.1 ~ 0.4	< 5 < 3
SN800 SN1000		High temperature alloys Inconel Stellite		Finish	700 ~ 1,000	0.05 ~ 0.15 / tooth	0.5 ~ 2.5	
SW400 SW800 WT400 WT800		High temperature alloys Inconel		Rough	150 ~ 400	0.05 ~ 0.1 / tooth	1 ~ 3	

GRADE INFORMATION

CERMET

A matrix of TiCN with carbide as a metal binder, Union Cermets are tougher than ceramics and harder than tungsten carbides. It shows greater wear resistance than carbide and its cutting speed is also much higher than carbide. Cermet inserts give excellent surface finish and high-speed machining.

- Four different grades for different workpiece and cutting condition.
- Ideal for high-speed finishing and milling of mild steel, carbon steel and alloy steel.
- Excellent performance in turning, grooving, boring, bearing and milling.

	TX515	Wear resistance and high mechanical strength TiCN	Finishing and boring for carbon steel and alloy steel	Harder ↑ ↓ Tougher
	TX915	TiN coating		
	TX520	Excellent thermal conductivity and wear resistance TiCN	The first choice for machining steel Turning, grooving, boring and bearing for steel	
	TX920	TiN coating		
	TX530	The toughest cermet grade TiCN	Wide range of milling for steel materials	
	TX930	TiN coating		

Physical Properties

Grade	Composition	Color	Density (g/cm3)	Hardness (HRA)	Toughness (MPa·m ^{1/2})	Thermal Conductivity (cal/cm. sec. °C)
TX515	TiCN	Silver	6.48	93.00	7.50	0.08
TX520	TiCN	Silver	6.53	92.50	8.00	0.09
TX530	TiCN	Silver	6.35	91.00	8.40	0.09
TX915	TX515+TiN PVD	Gold	6.48	98.00	7.50	-
TX920	TX520+TiN PVD	Gold	6.53	97.50	8.00	-
TX930	TX530+TiN PVD	Gold	6.35	96.00	8.40	-

Choice of Ceramic Grade for Workpiece


	TX515/TX915	TX520/TX920	TX530/TX930
MILD STEEL	◎	◎	○
CARBON STEEL	◎	◎	◎
ALLOY STEEL	○	○	○
FORGED STEEL			
HEAT TREATED STEEL			
HEAT RESISTANT STEEL	◎	◎	◎

◎ : Excellent ○ : Good

Choice of Ceramic Grade for Workpiece

Application	Grade	Workpiece	Machining Type	Speed (V) (m/min)	Feed (f) (mm/rev)	Depth (DOC) (mm)
Turning	TX515/TX915	Mild Steel, Carbon Steel, Alloy Steel	Finishing Medium	100 ~ 500	0.03 ~ 0.3	0.1 ~ 2.0
	TX520/TX920	Bearing Steel, General Steel	Finishing Medium	100 ~ 400	0.03 ~ 0.3	0.1 ~ 2.0
Milling	TX530/TX930	Mild Steel, Carbon Steel, Alloy Steel	Medium Roughing	100 ~ 400 100 ~ 500	0.1 ~ 0.3 0.1 ~ 0.5	< 5 < 3

Choice of Chipbreaker

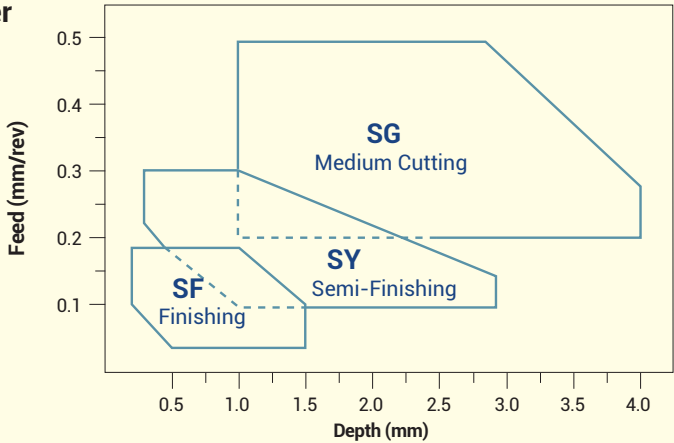

Chipbreaker Type	Shape	Machining Type	Characteristics
SF		Finishing	Sharp and narrow C/B Optimum for D=0.10~1.50, f=0.05~0.20 Specialized for shaft machining
SY		Semi-finishing	General performing C/B Optimum for D=0.30~2.50, f=0.10~0.30 Low carbon steel, pipe (STKM) machining
SG		Medium cutting	Wider C/B design Optimum for D=1.00~5.00, f=0.20~0.50 Low carbon steel

CARBIDE

Grade Information

Grade	Microstructure	Application Range		
UW100		Finishing & Medium cutting of super alloys(HRSA, Ti-Alloy etc) High temperature oxidation resistance and predictable wear tendency		
Composition	Color	Density(g/cm ³)	Hardness(HRA)	Toughness(MPa·m ^{1/2})
WC, PVD coating	Black	15.0	92.50	9.00

Recommended Cutting Condition

Work Material	Machining	Vc	Feed(mm/rev)	DOC(mm)	Coolant
HRSA(Inconel 718)	Finishing	100-300	0.05~0.2	~1.0	○
Ti - Alloy(Ti6Al4V)	Finishing	50-150	0.05~0.2	~1.0	○

GRADE INFORMATION

PCBN / PCD

Union PCBN is an ultra hard cutting tool consisting of polycrystalline cubic boron nitride with metallic or ceramic binder. It is available both tip brazed and solid CBN.

Union PCD is an ultra hard cutting tool consisting of polycrystalline diamond which is tip brazed to a carbide insert according to the various applications.

- PCBN is for hardened ferrous material
- PCD is for non-ferrous material, wood and aluminum and copperalloys at extremely high speed
- Extremely hard and wear-resistant
- Dry or wet machining depending on the cutting condition

PCBN	SBN1000	Ultra high hardness Its hardness is up to 3,900 Hv Content of PCBN : 95%	Ultra cutting speed for cast iron from roughing to finishing Machining chilled cast irons and high chrome alloy steel	Harder ↑ ↓ Tougher ↑ Harder
	SBC1000	AlTiN/TiSiN Coating		
	SBN2000	Machining for continuous cut of hardened steel Its hardness is up to 2,700 Hv Content of PCBN : 50%	Precision finishing of hardened steel Recommended to use for hard materials Bearing steel, forged steel and high speed steel	
	SBC2000	AlTiN/TiSiN Coating		
	SBN3000	Best combination of wear resistance and toughness Its hardness is up to 2,700 Hv Content of PCBN : 60%	Light interrupted cut of hardened steel General purpose of turning and milling for hardened steel	
	SBC3000	AlTiN/TiSiN Coating		
	SBN4000	Good resistance to crater and flank wear Its hardness is up to 2,900 Hv Content of PCBN : 65%	Heavy interrupted cut of hardened steel	
	SBC4000	AlTiN/TiSiN Coating		
	SBN5000	Extreme wear resistance Solid CBN Content of PCBN : 93%	Rough machining of cast iron powder metal alloy	
	SBC5000	AlTiN/TiSiN Coating		
PCD	SPD1000	Machining with fine surface finish Particle size : 4~5μm	Machining of aluminum and wood Gives fine surface finish in turning operation	
	SPD2000	Ultra high hardness Great wear resistance Particle size : 8~9μm	The first choice of PCD grades Turning operation of aluminum and copper alloy Machining aluminum alloy with lower percentage of Si	
	SPD3000	Machining with interruption Particle size : 15~22μm	Milling operation of aluminum alloy Machining ultra fine alloy and powder sintered metal cutting of composites	
	SPD4000	Specialized in machining for CFRP Particle size : 2 & 30μm	Milling operation for CFRP stacks with aluminum Machining lightweight and fibrous materials.	

Recommended Cutting Conditions

Application	Grade		Workpiece	Speed (V) (m/min)	Feed (f) (mm/rev)	Depth (DOC) (mm)
Turning	PCBN	SBN1000 SBC1000	Cast iron High hardened cast iron Nodular cast iron roll Carbide roll	400 ~ 1,000 75 ~ 150 45 ~ 60 10 ~ 15	0.15 ~ 0.45 0.15 ~ 0.30 0.60 ~ 0.80 0.15 ~ 0.25	0.10 ~ 2.00 0.10 ~ 1.80 2.00 ~ 3.50 0.50 ~ 2.50
		SBN2000 SBC2000	High hardened steel (roughing) High hardened steel (finishing, >H _R C 45) Hardened alloy steel (>H _R C 35)	60 ~ 140 100 ~ 140 100 ~ 240	0.15 ~ 0.40 0.10 ~ 0.20 0.05 ~ 0.30	0.70 ~ 2.30 0.10 ~ 0.75 0.10 ~ 2.50
		SBN3000 SBC3000	Hardened steel Heat resistance sintered steel	80 ~ 160 50 ~ 100	0.02 ~ 0.20 0.05 ~ 0.20	<0.5 <0.5
		SBN4000 SBC4000	Hardened steel Powder metal & Sintered irons superalloys	120 ~ 250 200 ~ 400 200 ~ 400	0.025 ~ 0.50 0.025 ~ 0.20 0.10 ~ 0.30	0.05 ~ 0.30 0.05 ~ 0.20 0.20 ~ 2.00
		SBN5000 SBC5000	Cast iron Ductile cast iron Hard cast iron (H _R C 59)	500 ~ 2,000 200 ~ 600 50 ~ 150	0.10 ~ 0.50 0.10 ~ 0.40 0.10 ~ 1.00	<0.5 <0.5 <0.5
	PCD	SPD1000	Plastic alloy Wood	300 ~ 1,000 1,000 ~ 2,500	0.05 ~ 0.25 0.10 ~ 0.50	0.05 ~ 3.00 0.20 ~ 4.50
		SPD2000	Aluminum / Zinc / Copper	600 ~ 1,000	0.05 ~ 0.25	0.05 ~ 0.30
		SPD2000 SPD3000 SPD3000	Aluminum alloy (Si 4~8%) (Si 9~14%) (Si 16~18%)	800 ~ 2,500 500 ~ 1,290 300 ~ 600	0.10 ~ 0.30 0.10 ~ 0.30 0.10 ~ 0.30	0.05 ~ 3.00 0.05 ~ 3.00 0.05 ~ 3.00
		SPD3000	Powdered Carbide Piece Sintered Carbide	50 ~ 250 20 ~ 40	0.10 ~ 0.40 0.05 ~ 0.20	0.10 ~ 4.00 0.02 ~ 0.45
		SPD4000	CFRP Aluminum alloy (Si 18~21%)	200 ~ 500 200 ~ 500	0.1 ~ 0.5 0.1 ~ 0.5	0.1 ~ 0.4 0.1 ~ 0.4
Milling	PCBN	SBN1000	Cast iron (H _B 180~230) Hardened cast iron (>H _B 400)	400 ~ 1,000 120 ~ 240	0.12 ~ 0.30 0.12 ~ 0.30	0.20 ~ 2.00 0.20 ~ 2.00
		SBN2000	Hardened steel (>H _R C 45) Hardened alloy steel (>H _R C 35)	120 ~ 240 120 ~ 240	0.10 ~ 0.25 0.10 ~ 0.35	0.12 ~ 1.00 0.10 ~ 1.00
		SBN3000	Hardened steel (>H _R C 45)	100 ~ 200	0.10 ~ 0.15	<0.5
		SBN4000	Hardened steel	150 ~ 250	0.025 ~ 0.30	0.05 ~ 0.20
	PCD	SPD3000	Aluminum alloy (<Si 14%) (>Si 15%)	300 ~ 3,000 100 ~ 240	0.10 ~ 0.25 0.10 ~ 0.35	0.12 ~ 1.00 0.10 ~ 1.00
		SPD4000	CFRP Aluminum alloy (Si 18~21%)	300 ~ 1,000 300 ~ 1,000	0.1 ~ 0.3 0.1 ~ 0.3	0.1 ~ 0.3 0.1 ~ 0.3



















Physical Properties








Grade	Contents of pCBN (%)	Particle size (μm)	Hardness (HV)
SBN1000 SBC1000	95	3	3,900
SBN2000 SBC2000	50	1	2,700
SBN3000 SBC3000	60	2	2,700
SBN4000 SBC4000	65	5	2,900
SBN5000 SBC5000	93	10	3,900

Grade	Particle size (μm)	Hardness (HV)
SPD1000	4 ~ 5	6,000 ~ 8,000
SPD2000	8 ~ 9	7,000 ~ 9,000
SPD3000	15 ~ 22	8,000 ~ 10,000
SPD4000	2 & 30	5,000 ~ 8,000

APPLICATION INDEX

CERAMIC














TURNING	CNGA	CNMA	CNGN	CNMN	CNGX	CNVX	CNMX
							
	Page 24	Page 25	Page 26	Page 27	Page 28	Page 28	Page 29
	CNMX .. RD	CCGX	CCGW	CPGN	DNGA	DNMA	DNGN
							
	Page 29	Page 29	Page 30	Page 31	Page 32	Page 32	Page 33
	DNGX	DNMX	DCGX	ENGN	RNGA	RNGN	RPGA
							
	Page 34	Page 34	Page 34	Page 35	Page 36	Page 36	Page 37
	RPGN	RPGN .. DP	RNGX .. DP	RBGN	RCGN	SCGA	SNMA
							
	Page 37	Page 38	Page 38	Page 39	Page 39	Page 40	Page 40
TURNING	SNGN	SNGX	SNMX	SNMX .. RD	SCGN	SCGX	SCGW
							
	Page 41	Page 42	Page 42	Page 42	Page 43	Page 43	Page 43
	SPGN	SPGN ... CR	SNHN ... CR	TNGA	TNGN	TCUN	TPGN
							
	Page 44	Page 44	Page 44	Page 45	Page 46	Page 47	Page 48
	TPUN	VNGA	VNGN	VNGX	WNGA	WNGX	CDH
							
	Page 48	Page 49	Page 49	Page 50	Page 51	Page 51	Page 52
	F-Series	F-Series	F-Series	F-Series	F-Series	F-Series	F-Series
							
	Page 53	Page 53	Page 53	Page 53	Page 54	Page 54	Page 54

TURNING	LNJ	SNGN3812R	RBGX	RCGX	RPGX	RXGX	SYBF
							
	Page 55	Page 55	Page 56	Page 56	Page 57	Page 57	Page 58
	SYBF .. K	SYBR	SGF	SGR	SSF	SSR	WFC
							
	Page 58	Page 58	Page 59	Page 59	Page 60	Page 60	Page 61
	WRC	WFP	WRP	SRG	SRGA		
							
	Page 62	Page 63	Page 64	Page 65	Page 65		
	HNEN	LNE	OEGB	OEGB ... CR	OPEN	SNCN	SNCN .. ENTN
MILLING							
	Page 66	Page 66	Page 67	Page 67	Page 67	Page 68	Page 68
	SNGN .. ING	SDCN	SDCN .. T	SDCW	SEAN	SEAN .. NW	SEAN .. T
							
	Page 68	Page 69	Page 69	Page 69	Page 70	Page 70	Page 70
	SPCN .. T	SPCW	SPEN	SPHX	SPKN	SPKN .. SP	TNCN
							
	Page 71	Page 71	Page 71	Page 72	Page 72	Page 72	Page 73
	TEKN	TPKN	CNGN .. AZ	SNCN .. ZZT	SNCN .. GZ	SNCN .. KZ	SCGN .. WZ
							
SPECIAL	Page 73	Page 73	Page 74	Page 75	Page 75	Page 75	Page 76
	SCGN .. XZ	SCGN .. ZZ	SCGN .. MZ	SCGN .. ZZM			
							
	Page 76	Page 76	Page 77	Page 77			
	SVW	GVGN	SZT 5810	SNMX	SNGF	INGN	ENDMILL
							
	Page 78	Page 78	Page 79	Page 79	Page 80	Page 80	Page 81


APPLICATION INDEX

CERMET

TURNING

CNMG .. SF	CNMG .. SY	CNMG .. SG	DNMG .. SF	DNMG .. SY	DNMG .. SG	SNMG .. SF
						
Page 86	Page 86	Page 86	Page 87	Page 87	Page 87	Page 88
SNMG .. SY	SNMG .. SG	TNMG .. SY	TNMG .. SG	VNMG .. SG	WNMG .. SY	WNMG .. SG
						
Page 88	Page 88	Page 89	Page 89	Page 89	Page 90	Page 90
CCMT	DCGW	CPGT	SPGT	TPGT	TPGT .. KC	TPGR
						
Page 91	Page 91	Page 91	Page 92	Page 92	Page 92	Page 93
SPMW	DNGG	SNGG	SNGL	TNGG	TNGG .. FS	TNGG .. F
						
Page 93	Page 94	Page 94	Page 94	Page 95	Page 95	Page 95
TNMG .. 2G						
						
Page 96						

MILLING

SDCN	SDKN	SDEN	SDEW	SNK	SEHW	SEKN
						
Page 97	Page 97	Page 97	Page 98	Page 98	Page 98	Page 99
SEKN .. R	SPKN	TEKN	TPKN	YCE	XCET	
						
Page 99	Page 99	Page 98	Page 100	Page 101	Page 101	













SPECIAL

BSN	BTN	GBF	INGN	RBAR	SBAR
					
Page 102	Page 102	Page 103	Page 103	Page 104	Page 106









APPLICATION INDEX

PCBN·PCD




PCBN

CNGA	CCGW	DNGA	DNGA ... CB	DCGW	SNGA	SNGN	SCGW
							
Page 110	Page 110	Page 110	Page 110	Page 110	Page 111	Page 111	Page 111
TNGA	TCGW	TPGN	TPGB	TPGW	VNGA	VBGW	VCGW
							
Page 111	Page 112	Page 112	Page 112	Page 112	Page 113	Page 113	Page 113
CNGA	CCGW	DCGW	SNGA	SCGW	DNGA	TNGA	TPGW
							
Page 114	Page 114	Page 114	Page 114	Page 115	Page 115	Page 115	Page 115
VNGA	VBGW	RCGX	RNGN	RPGN	TBGN	CNGN	RNGN
							
Page 116	Page 116	Page 117	Page 117	Page 117	Page 117	Page 118	Page 118
SNGN	TNGN	CNGA	RNGA	SNGA	TNGA		
							
Page 118	Page 118	Page 119	Page 119	Page 119	Page 119		

PCD

CNGA	CCGW	CPGW	DNGA	DCGW	SNGA	SNGN	SCGW
							
Page 120	Page 120	Page 120	Page 120	Page 121	Page 121	Page 121	Page 121
SPGN	SPGW	TNGA	TBGW	TCGW	TPGN	TPGB	TPGW
							
Page 122	Page 122	Page 122	Page 122	Page 123	Page 123	Page 123	Page 124
TPGT	VNGA	VBGW	VCGW				
							
Page 124	Page 124	Page 124	Page 125				

SPECIAL

TCGW/TPGW .. FS	CCGW .. FS	SCGW .. FS	SPGW .. FS	SPCN	SPKN	SFCN	TPCN
							
Page 126	Page 126	Page 127	Page 127	Page 128	Page 128	Page 129	Page 129
UGMR	UGMT	UTGR/L	NOTCH BITE	SFE .. 1C	SFE .. 2C	SBE .. 1C	SBN .. 2C
							
Page 130	Page 130	Page 131	Page 132	Page 133	Page 133	Page 134	Page 134

IDENTIFICATION SYSTEM

ISO **TURNING**
ASA **MILLING**

S N G N
S N G N
S P K N
1 2 3 4

12 04 08 E040
4 3 2
4 3
5 6 7 8 9 10 11 12

1 Shape

C D E H L
R S T V W

2 Clearance Angle

B C D E
N P O

Other Clearance Angles Requiring Descriptions

3 Tolerance

*See tables below

Symbol	d(mm)	m(mm)	s(mm)
A	±0.025	±0.005	±0.025
C	±0.025	±0.013	±0.025
E	±0.025	±0.025	±0.025
F	±0.013	±0.005	±0.025
G	±0.025	±0.025	±0.130
H	±0.013	±0.013	±0.025
J	*	±0.005	±0.025
K	*	±0.013	±0.025
L	*	±0.025	±0.025
M	*	*	±0.127
U	*	*	±0.127
N	*	*	±0.025

IC (mm)	D		C, E, H, O, S, T, R, W			
	d(mm)	m(mm)	d(mm)		m(mm)	
	M, N	M, N	J, K, L, M, N	U	M, N	U
5.56	±0.05	±0.11	±0.05	±0.08	±0.08	±0.13
6.35	±0.05	±0.11	±0.05	±0.08	±0.08	±0.13
7.94	±0.05	±0.11	±0.05	±0.08	±0.08	±0.13
9.52	±0.05	±0.11	±0.05	±0.08	±0.08	±0.13
12.70	±0.08	±0.15	±0.08	±0.13	±0.13	±0.20
15.87	±0.10	±0.18	±0.10	±0.18	±0.15	±0.27
19.05	±0.10	±0.18	±0.10	±0.18	±0.15	±0.27
25.40	-	-	±0.13	±0.25	±0.18	±0.38

4 Type

A B C F G H J M
N Q R T U W X

Diameter of inscribed circle	ASA		ISO						
	over 6.35 (IC)	over 5.56 (IC)	R	W	V	D	C	S	T
3.969	-	5	03	02	-	04	03	03	06
4.762	-	6	04	03	-	05	04	04	08
5.556	-	7	05	03	09	06	05	05	09
6.350	2	(8)	06	04	11	07	06	06	11
7.938	-	0	07	05	13	09	08	07	13
9.525	3	-	09	06	16	11	09	09	16
12.700	4	-	12	08	22	15	12	12	22
15.875	5	-	15	10	27	19	16	15	27
19.050	6	-	19	13	33	23	19	19	33
22.225	7	-	22	-	38	27	22	22	38
25.400	8	-	25	-	44	31	25	25	44
31.750	0	-	31	-	54	38	32	31	55

6 Thickness			
Thickness(mm)		ASA	
		Over 6.35(IC)	Over 5.56(IC)
1.59	01	-	2
2.38	02	-	3
3.18	03	2	4
3.97	T3	-	5
4.76	04	3	6
5.56	05	-	-
6.35	06	4	-
7.94	07	5	-
9.52	09	6	-
12.70	12	8	-

7 Nose-Radius		
(mm)	ISO	ASA
Sharp	00	0
0.2	02	Y
0.4	04	1
0.8	08	2
1.2	12	3
1.6	16	4
2.0	20	5
2.4	24	6
2.8	28	7
3.2	32	8

8 Shape and Corner

Detailed edge preparations refer to the next page.

9 Land Angle	
A	45°
D	60°
E	75°
F	85°
P	90°

10 Relief Angle for Land	
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°

11 Edge	
F	Sharp
E	Honed
T	Chamfered
S	Chamfered + Honed


12 Cutting Direction

R L N

IDENTIFICATION SYSTEM

8 Chamfer Specification

1 Mono chamfer

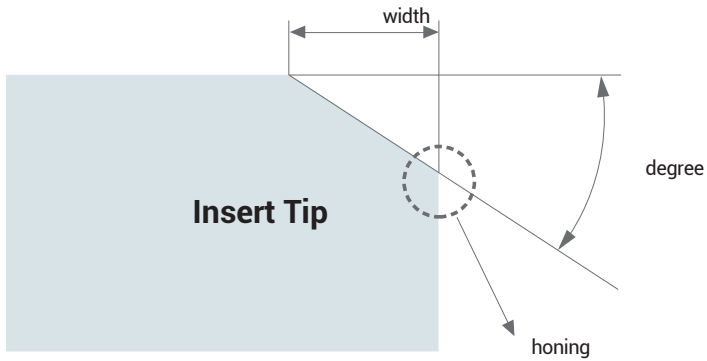


ISO

SNGN 120408 E 0 4 0

Chamfer Degree (°)	Chamfer Width (mm)		Honing (μm)
E : 20	01 : 0.05	10 : 0.50	0 : No Honing
F : 25	02 : 0.10	20 : 1.00	1 : 10
G : 30	03 : 0.15	40 : 2.00	2 : 20
	04 : 0.20		3 : 30

2 Double chamfer

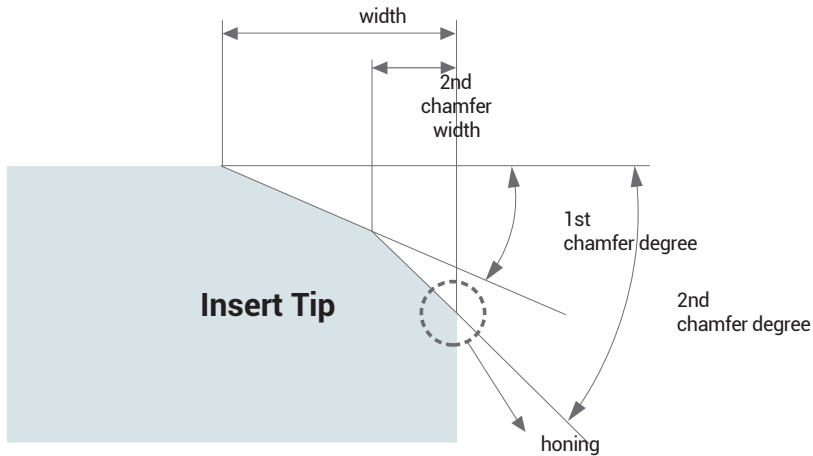


ISO

SNGN 190716 X 5 4 2

1st Chamfer Degree (°)	1st Chamfer Width (mm)		2nd Chamfer Width(mm)×Degree		Honing (μm)
W : 10 X : 15	3 : 1.00 4 : 1.20 5 : 1.50 6 : 2.00	A : 0.75 B : 1.25 D : 2.30	3 : 0.20×25 4 : 0.10×30 5 : 0.20×30	A : 0.15×30 B : 0.45×25	0 : No Honing 1 : 10 2 : 20 3 : 30 5 : 50

SiAlON (SN950)

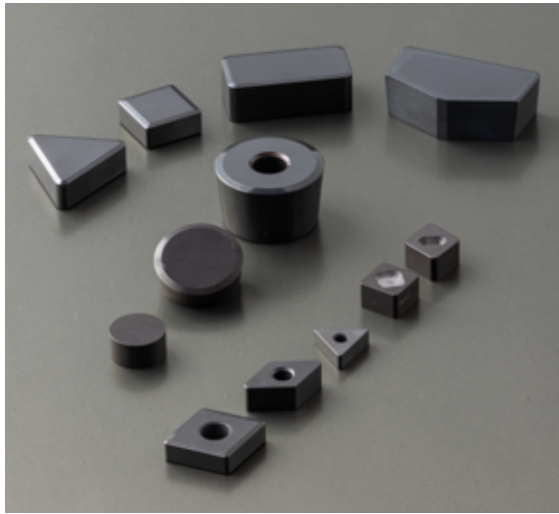

Grade	Application Range & Characteristics
SN950	- Roughing & Semi-finishing for HRSA (Heat Resistant Super Alloys) - Reinforced toughness and β'-SiAlON phase
SN800	- High Speed roughing of high temperature alloy and Inconel
SN1000	- Ni-based alloys, Co-based alloys in medium or low speed cutting

SN950 Application

- Workpiece : Inconel 718
- Insert Shape : RNGN 120700 E020 (RNG 45 T01020)
- Test conditions : Vc 230 m/min, Feed 0.2 mm/rev DOC 1.0 mm, WET
- Cutting Distance : 1.5 km


Union SN950

Competitor

	0.267mm			
0.1	0.2	0.3	0.4	
			0.429mm	
0.1	0.2	0.3	0.4	

Flank Wear (Vbmax. mm)


Whisker Grade (SW400/SW800)

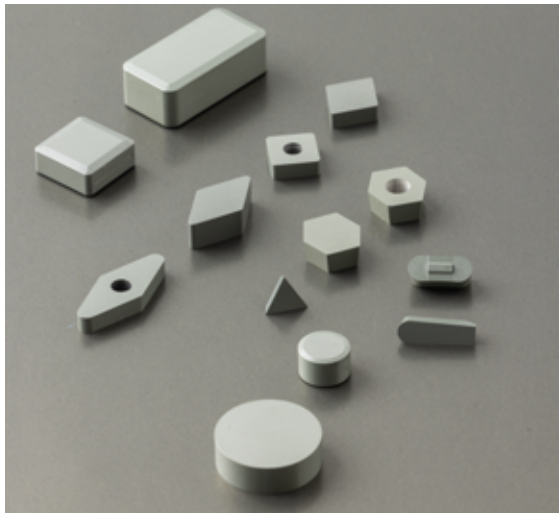

Grade	Application Range & Characteristics
SW400	- High Speed Steel, High Chrome Steel in medium or low speed cutting - Roughing & Medium cutting with heavy interruption
SW800	- Ni-based alloys, Co-based alloys in high speed cutting - Roughing & Finishing with continuous or light interruption

- Best Performance for HRSA (Inconel, Waspaloy, Stellite)
- For High-Speed machining of HRSA with Optimized Heat and Fracture resistance



CERAMIC

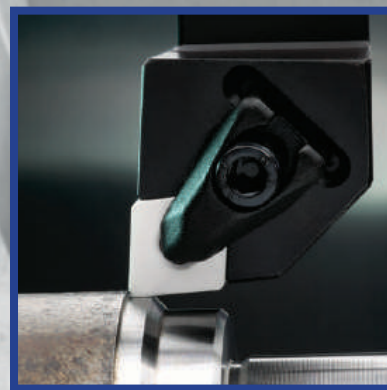

TURNING	A 24
Roll Turning	A 52
Grooving	A 58
Milling	A 66
Wiper	A 74
Special	A 78

TURNING INSERT



CNGA

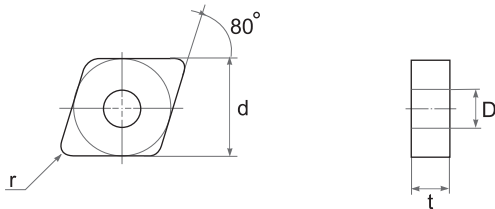

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	D																				
CNGA 120404	CNGA 431	12.70	4.76	0.4	5.16	●	●	●	●	●			●					●		●					
CNGA 120408	CNGA 432	12.70	4.76	0.8	5.16	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●			
CNGA 120412	CNGA 433	12.70	4.76	1.2	5.16	●	●			●	●		●	●	●	●	●	●		●	●	●			
CNGA 120416	CNGA 434	12.70	4.76	1.6	5.16	●	●			●			●	●	●			●		●	●	●			
CNGA 120704	CNGA 451	12.70	7.94	0.4	5.16																				
CNGA 120708	CNGA 452	12.70	7.94	0.8	5.16	●	●				●		●	●											
CNGA 120712	CNGA 453	12.70	7.94	1.2	5.16	●	●	●			●		●	●				●		●	●	●			
CNGA 120716	CNGA 454	12.70	7.94	1.6	5.16	●					●		●	●				●		●					
CNGA 160608	CNGA 542	15.87	6.35	0.8	6.35								●												
CNGA 160612	CNGA 543	15.87	6.35	1.2	6.35								●	●	●						●	●			
CNGA 160616	CNGA 544	15.87	6.35	1.6	6.35	●									●										
CNGA 160708	CNGA 552	15.87	7.94	0.8	6.35	●	●																		
CNGA 160712	CNGA 553	15.87	7.94	1.2	6.35	●	●							●											
CNGA 160716	CNGA 554	15.87	7.94	1.6	6.35									●											
CNGA 190608	CNGA 642	19.05	6.35	0.8	7.93	●							●	●				●		●					
CNGA 190612	CNGA 643	19.05	6.35	1.2	7.93								●								●	●			
CNGA 190616	CNGA 644	19.05	6.35	1.6	7.93	●	●																		
CNGA 190712	CNGA 653	19.05	7.94	1.2	7.93																				
CNGA 190716	CNGA 654	19.05	7.94	1.6	7.93	●																			

TURNING INSERT



CNMA

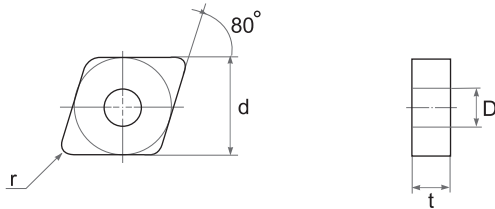

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	D																				
CNMA 120408	CNMA 432	12.70	4.76	0.8	5.16									●	●										
CNMA 120412	CNMA 433	12.70	4.76	1.2	5.16									●	●	●	●	●		●					
CNMA 120416	CNMA 434	12.70	4.76	1.6	5.16									●	●	●	●	●		●					
CNMA 160612	CNMA 543	15.87	6.35	1.2	6.35										●		●								
CNMA 160616	CNMA 544	15.87	6.35	1.6	6.35										●		●								

TURNING INSERT



CNGN

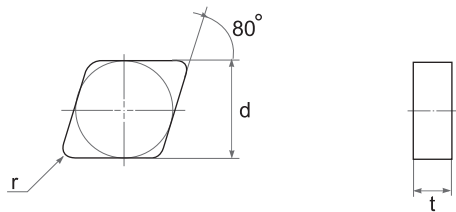

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
CNGN 090304	CNGN 321	9.52	3.18	0.4		●																		
CNGN 090308	CNGN 322	9.52	3.18	0.8			●									●	●		●					
CNGN 090312	CNGN 323	9.52	3.18	1.2												●	●		●					
CNGN 120304	CNGN 421	12.70	3.18	0.4	●																			
CNGN 120308	CNGN 422	12.70	3.18	0.8	●																			
CNGN 120312	CNGN 423	12.70	3.18	1.2	●																			
CNGN 120404	CNGN 431	12.70	4.76	0.4	●	●			●	●														
CNGN 120408	CNGN 432	12.70	4.76	0.8	●	●	●	●	●	●	●	●		●	●		●		●	●	●			
CNGN 120412	CNGN 433	12.70	4.76	1.2	●	●	●	●	●	●		●		●	●	●	●		●	●	●			
CNGN 120416	CNGN 434	12.70	4.76	1.6	●	●	●		●			●		●	●	●	●		●	●	●			
CNGN 120704	CNGN 451	12.70	7.94	0.4																●	●			
CNGN 120708	CNGN 452	12.70	7.94	0.8								●	●				●		●					
CNGN 120712	CNGN 453	12.70	7.94	1.2	●	●			●	●		●		●	●		●		●	●	●			
CNGN 120716	CNGN 454	12.70	7.94	1.6	●	●			●	●		●		●	●		●		●	●	●			
CNGN 160608	CNGN 542	15.87	6.35	0.8																				
CNGN 160612	CNGN 543	15.87	6.35	1.2	●									●						●	●			
CNGN 160616	CNGN 544	15.87	6.35	1.6	●																			
CNGN 160708	CNGN 552	15.87	7.94	0.8	●					●														
CNGN 160712	CNGN 553	15.87	7.94	1.2	●	●	●					●		●	●									
CNGN 160716	CNGN 554	15.87	7.94	1.6	●	●	●		●		●	●	●	●										
CNGN 160720	CNGN 555	15.87	7.94	2.0	●							●	●											
CNGN 190612	CNGN 643	19.05	6.35	1.2	●	●																		
CNGN 190616	CNGN 644	19.05	6.35	1.6	●	●																		
CNGN 190712	CNGN 653	19.05	7.94	1.2	●	●																		
CNGN 190716	CNGN 654	19.05	7.94	1.6	●	●																		
CNGN 190720	CNGN 655	19.05	7.94	2.0	●																			
CNGN 250724	CNGN 856	25.40	7.94	2.4	●																			
CNGN 250924	CNGN 866	25.40	9.52	2.4	●	●	●					●												

TURNING INSERT



CNMN

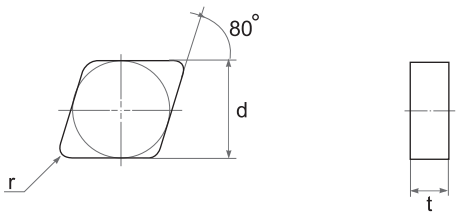

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
CNMN 120412	CNMN 433	12.70	4.76	1.2										●			●		●					
CNMN 120416	CNMN 434	12.70	4.76	1.6										●			●		●					



TURNING INSERT

CNGX

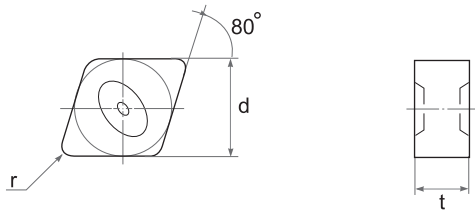

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
CNGX 120412	CNGX 433	12.70	4.76	1.2									●	●										
CNGX 120416	CNGX 434	12.70	4.76	1.6										●										
CNGX 120708	CNGX 452	12.70	7.94	0.8	●	●							●											
CNGX 120712	CNGX 453	12.70	7.94	1.2	●	●							●	●	●									
CNGX 120716	CNGX 454	12.70	7.94	1.6	●	●							●	●	●	●								
CNGX 160708	CNGX 552	15.87	7.94	0.8									●											
CNGX 160712	CNGX 553	15.87	7.94	1.2									●	●	●									
CNGX 160716	CNGX 554	15.87	7.94	1.6									●	●										


CNVX

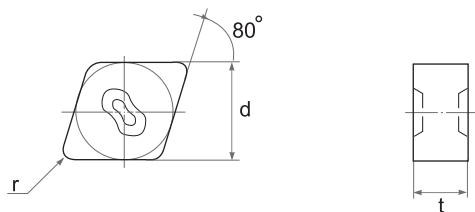

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
CNVX 120412	CNVX 433	12.70	4.76	1.2										●										
CNVX 120416	CNVX 434	12.70	4.76	1.6										●										
CNVX 120708	CNVX 452	12.70	7.94	0.8	●					●			●											
CNVX 120712	CNVX 453	12.70	7.94	1.2	●	●				●			●	●	●	●	●		●					
CNVX 120716	CNVX 454	12.70	7.94	1.6		●		●		●			●	●	●	●	●		●					


TURNING INSERT

CNMX

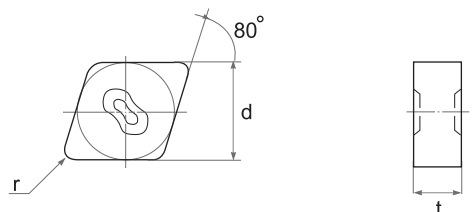


Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
CNMX 120712	CNMX 453	12.70	7.94	1.2										●	●	●								
CNMX 120716	CNMX 454	12.70	7.94	1.6										●	●	●	●		●					

CNMX .. RD

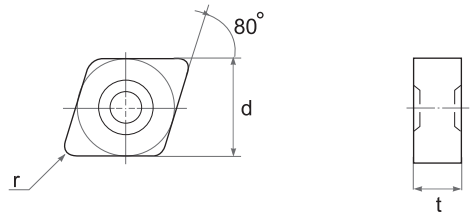

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
CNMX 120716 RD	CNMX 454 RD	12.7	7.94	1.6									●	●										


CCGX

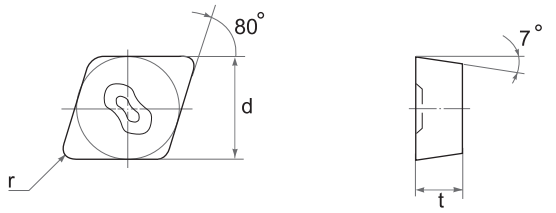

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
CCGX 120608	CCGX 442	12.70	6.35	0.8										●										
CCGX 120612	CCGX 443	12.70	6.35	1.2										●	●	●	●		●					
CCGX 120616	CCGX 444	12.70	6.35	1.6										●										

TURNING INSERT



CCGW

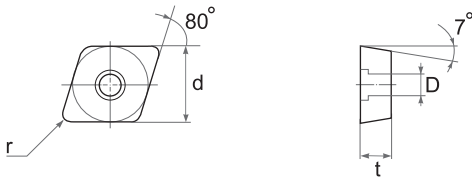

Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	d	t	r																				
CCGW 09T304		9.52	3.97	0.4	4.40				●				●	●										
CCGW 09T308		9.52	3.97	0.8	4.40				●				●	●		●								
CCGW 09T312		9.52	3.97	1.2	4.40								●	●		●								
CCGW 120408		12.70	4.76	0.8	5.50									●										
CCGW 120412		12.70	4.76	1.2	5.50									●										

TURNING INSERT



CPGN

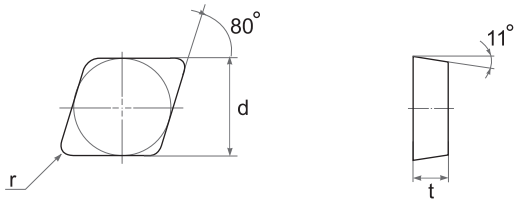

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
CPGN 090304	CPGN 321	9.52	3.18	0.4																●	●			
CPGN 090308	CPGN 322	9.52	3.18	0.8																●	●			
CPGN 120408	CPGN 432	12.70	4.76	0.8	●															●	●			
CPGN 120412	CPGN 433	12.70	4.76	1.2																				
CPGN 120416	CPGN 434	12.70	4.76	1.6																				



TURNING INSERT

DNGA

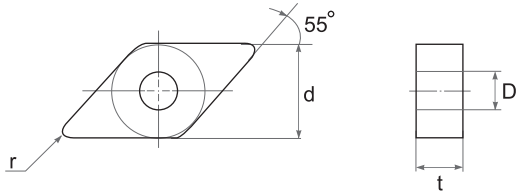

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	D																				
DNGA 150404	DNGA 431	12.70	4.76	0.4	5.16	●	●		●													●	●		
DNGA 150408	DNGA 432	12.70	4.76	0.8	5.16	●	●	●	●				●	●	●							●	●		
DNGA 150412	DNGA 433	12.70	4.76	1.2	5.16	●	●	●	●					●	●	●		●		●	●	●			
DNGA 150416	DNGA 434	12.70	4.76	1.6	5.16	●							●								●	●			
DNGA 150604	DNGA 441	12.70	6.35	0.4	5.16	●	●	●	●	●		●													
DNGA 150608	DNGA 442	12.70	6.35	0.8	5.16	●	●	●	●	●			●		●										
DNGA 150612	DNGA 443	12.70	6.35	1.2	5.16	●	●	●	●				●		●	●		●		●					
DNGA 150616	DNGA 444	12.70	6.35	1.6	5.16	●	●	●																	
DNGA 150704	DNGA 451	12.70	7.94	0.4	5.16	●	●																		
DNGA 150708	DNGA 452	12.70	7.94	0.8	5.16	●	●					●	●	●	●										
DNGA 150712	DNGA 453	12.70	7.94	1.2	5.16	●	●					●		●	●	●		●		●					
DNGA 150716	DNGA 454	12.70	7.94	1.6	5.16																				
DNGA 190608	DNGA 542	15.87	6.35	0.8	6.35	●	●																		
DNGA 190612	DNGA 543	15.87	6.35	1.2	6.35	●	●					●	●		●			●		●					
DNGA 190616	DNGA 544	15.87	6.35	1.6	6.35	●																			



DNMA

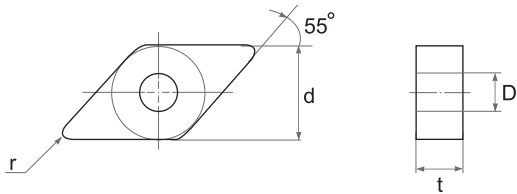

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	D																				
DNMA 150612	DNMA 443	12.70	6.35	1.2	5.16									●	●										
DNMA 150616	DNMA 444	12.70	6.35	1.6	5.16										●										

TURNING INSERT


DNGN

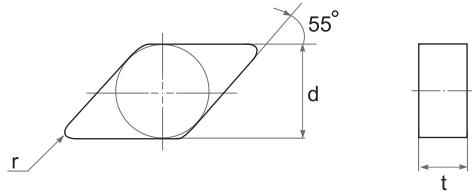

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																					
DNGN 150404	DNGN 431	12.70	4.76	0.4																					
DNGN 150408	DNGN 432	12.70	4.76	0.8		●								●								●	●		
DNGN 150412	DNGN 433	12.70	4.76	1.2																		●	●		
DNGN 150416	DNGN 434	12.70	4.76	1.6																		●	●		
DNGN 150604	DNGN 441	12.70	6.35	0.4																					
DNGN 150608	DNGN 442	12.70	6.35	0.8		●			●						●			●		●					
DNGN 150612	DNGN 443	12.70	6.35	1.2		●	●		●						●			●		●					
DNGN 150616	DNGN 444	12.70	6.35	1.6																					
DNGN 150704	DNGN 451	12.70	7.94	0.4		●	●																		
DNGN 150708	DNGN 452	12.70	7.94	0.8		●	●	●	●			●	●	●				●		●					
DNGN 150712	DNGN 453	12.70	7.94	1.2		●	●	●	●			●	●	●	●			●		●					
DNGN 150716	DNGN 454	12.70	7.94	1.6		●	●					●	●	●	●			●		●					


TURNING INSERT

DNGX

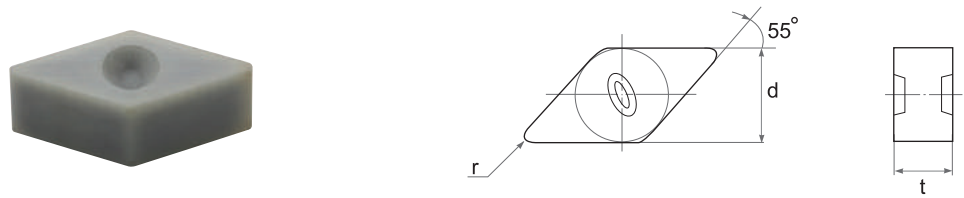


Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
DNGX 120708	DNGX 352	10.00	7.94	0.8						●				●										
DNGX 120712	DNGX 353	10.00	7.94	1.2						●			●	●	●	●	●		●					
DNGX 120716	DNGX 354	10.00	7.94	1.6						●			●	●	●									
DNGX 150708	DNGX 452	12.70	7.94	0.8																				
DNGX 150712	DNGX 453	12.70	7.94	1.2						●			●	●					●					
DNGX 150716	DNGX 454	12.70	7.94	1.6									●	●	●	●	●		●					

DNMX

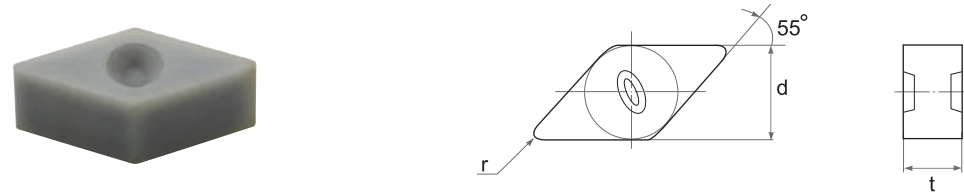

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
DNMX 120708	DNMX 352	10.00	7.94	0.8											●									
DNMX 120712	DNMX 353	10.00	7.94	1.2										●	●									
DNMX 120716	DNMX 354	10.00	7.94	1.6										●	●	●								


DCGX

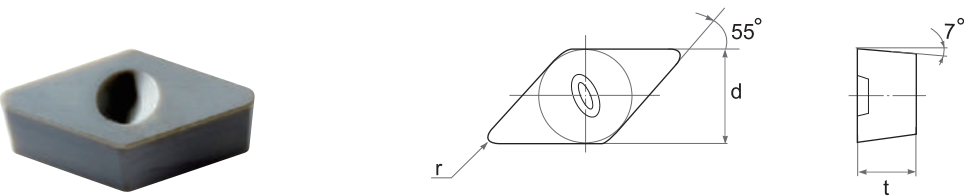

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
DCGX 150612	DCGX 443	12.70	6.35	1.2										●		●								
DCGX 150616	DCGX 444	12.70	6.35	1.6										●		●								

TURNING INSERT



ENGN

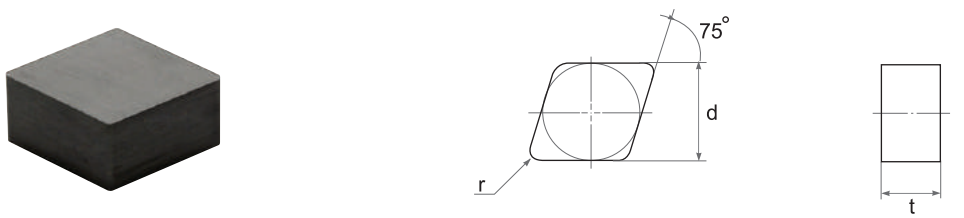

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
ENGN 130404	ENGN 431	12.70	4.76	0.4																				
ENGN 130408	ENGN 432	12.70	4.76	0.8		●							●	●										
ENGN 130412	ENGN 433	12.70	4.76	1.2		●							●	●										
ENGN 130704	ENGN 451	12.70	7.94	0.4	●	●																		
ENGN 130708	ENGN 452	12.70	7.94	0.8	●	●	●	●		●	●	●	●	●										
ENGN 130712	ENGN 453	12.70	7.94	1.2	●	●	●	●				●	●	●			●		●	●	●			
ENGN 130716	ENGN 454	12.70	7.94	1.6	●	●				●		●	●	●										



TURNING INSERT

RNGA



Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	D																				
RNGA 120400	RNGA 430	12.70	4.76	5.16	●	●																		
RNGA 120700	RNGA 450	12.70	7.94	5.16	●	●														●	●			



RNGN



Type		Dimensions (mm)		ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t																				
RNGN 060300	RNGN 220	6.35	3.18		●																		
RNGN 060400	RNGN 230	6.35	4.76	●		●																	
RNGN 090300	RNGN 320	9.52	3.18	●		●					●	●											
RNGN 090400	RNGN 330	9.52	4.76	●	●	●		●			●					●		●	●	●			
RNGN 120300	RNGN 420	12.70	3.18								●					●		●					
RNGN 120400	RNGN 430	12.70	4.76	●	●	●		●	●		●	●	●	●	●	●		●	●	●			
RNGN 120600	RNGN 440	12.70	6.35																				
RNGN 120700	RNGN 450	12.70	7.94	●	●	●		●	●	●	●	●	●	●	●	●		●	●	●			
RNGN 150700	RNGN 550	15.87	7.94	●							●	●											
RNGN 190600	RNGN 640	19.05	6.35	●	●						●					●		●					
RNGN 190700	RNGN 650	19.05	7.94	●	●	●			●			●				●		●	●	●			
RNGN 250700	RNGN 850	25.40	7.94	●		●	●		●	●	●	●											
RNGN 250900	RNGN 860	25.40	9.52																				
RNGN 320900	RNGN 106	31.75	9.52	●																			
RNGN 0807MO		8.00	7.94	●																			
RNGN 1007MO		10.00	7.94	●																			
RNGN 1207MO		12.00	7.94	●																			


TURNING INSERT

RPGA



Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	D																				
RNGA 120400	RNGA 430	12.70	4.76	5.16	●																			
RNGA 120700	RNGA 450	12.70	7.94	5.16	●																			



RPGN



Type		Dimensions (mm)		ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t																				
RPGN 090300	RPGN 320	9.52	3.18	●	●											●	●						
RPGN 090400	RPGN 330	9.52	4.76	●	●	●																	
RPGN 120300	RPGN 420	12.70	3.18																				
RPGN 120400	RPGN 430	12.70	4.76	●	●								●			●		●	●	●			
RPGN 120700	RPGN 450	12.70	7.94	●	●											●		●					
RPGN 150700	RPGN 550	15.87	7.94																				
RPGN 190700	RPGN 650	19.05	7.94		●																		



TURNING INSERT

RPGX .. DP



Type		Dimensions (mm)		ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t																				
RPGX 1204 DP	RPGX 43 DP	12.70	4.76																				
RPGX 1207 DP	RPGX 45 DP	12.70	7.94																				



RNGX .. DP



Type		Dimensions (mm)		ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t																				
RNGX 1207 DP	RNGX 45 DP	12.70	7.94																				


TURNING INSERT

RBGN



Type		Dimensions (mm)		ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t																				
RBGN 060300	RBGN 220	6.35	3.18																				
RBGN 060400	RBGN 230	6.35	4.76																				
RBGN 090300	RBGN 320	9.52	3.18																				
RBGN 090400	RBGN 330	9.52	4.76																				
RBGN 120400	RBGN 430	12.70	4.76																				
RBGN 120600	RBGN 440	12.70	6.35																				
RBGN 120700	RBGN 450	12.70	7.94																				
RBGN 0604MO		6.00	4.76																				
RBGN 0804MO		8.00	4.76																				
RBGN 1007MO		10.00	7.94																				
RBGN 1207MO		12.00	7.94																				
RBGN 1607MO		16.00	7.94																				



RCGN



Type		Dimensions (mm)		ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO		d	t																				
RCGN 060400		6.35	4.76																				
RCGN 060600		6.35	6.35																				
RCGN 060700		6.35	7.94																				
RCGN 070400		7.94	4.76																				
RCGN 090700		9.52	7.94																				
RCGN 120700		12.70	7.94																				
RCGN 151000		15.87	10.00																				
RCGN 191000		19.05	10.00																				
RCGN 251200		25.40	12.70																				



TURNING INSERT

SNGA

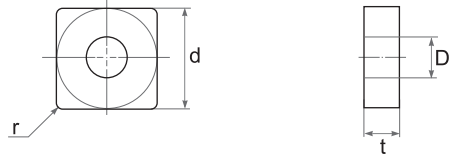

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	D																				
SNGA 090304	SNGA 321	9.52	3.18	0.4	3.81	●	●																		
SNGA 090308	SNGA 322	9.52	3.18	0.8	3.81	●	●																		
SNGA 090312	SNGA 323	9.52	3.18	1.2	3.81	●	●																		
SNGA 090404	SNGA 331	9.52	4.76	0.4	3.81																				
SNGA 090408	SNGA 332	9.52	4.76	0.8	3.81																				
SNGA 090412	SNGA 333	9.52	4.76	1.2	3.81																				
SNGA 090416	SNGA 334	9.52	4.76	1.6	3.81										●										
SNGA 120404	SNGA 431	12.70	4.76	0.4	5.16	●		●		●			●	●		●					●	●	●		
SNGA 120408	SNGA 432	12.70	4.76	0.8	5.16	●	●	●		●			●	●	●		●				●	●			
SNGA 120412	SNGA 433	12.70	4.76	1.2	5.16	●	●	●		●	●		●	●	●	●	●				●				
SNGA 120416	SNGA 434	12.70	4.76	1.6	5.16	●				●			●			●	●				●				
SNGA 120708	SNGA 452	12.70	7.94	0.8	5.16	●																			
SNGA 120712	SNGA 453	12.70	7.94	1.2	5.16	●							●	●											
SNGA 120716	SNGA 454	12.70	7.94	1.6	5.16	●					●		●	●				●		●					
SNGA 150608	SNGA 542	15.87	6.35	0.8	6.35		●																		
SNGA 150612	SNGA 543	15.87	6.35	1.2	6.35	●	●																		
SNGA 150616	SNGA 544	15.87	6.35	1.6	6.35		●																		
SNGA 190612	SNGA 643	19.05	6.35	1.2	7.94	●																			
SNGA 190616	SNGA 644	19.05	6.35	1.6	7.94																				



SNMA

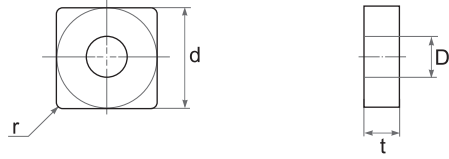

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	D																				
SNMA 120408	SNMA 432	12.70	4.76	0.8	5.16										●										
SNMA 120412	SNMA 433	12.70	4.76	1.2	5.16									●	●			●		●					
SNMA 120416	SNMA 434	12.70	4.76	1.6	5.16									●	●										
SNMA 150616	SNMA 544	15.87	6.35	1.6	6.35									●	●										

TURNING INSERT


SNGN

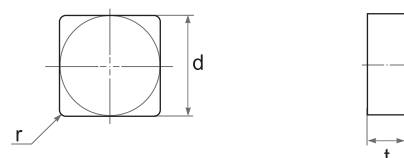

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																					
SNGN 090304	SNGN 321	9.52	3.18	0.4		●	●																		
SNGN 090308	SNGN 322	9.52	3.18	0.8		●	●	●		●			●		●										
SNGN 090312	SNGN 323	9.52	3.18	1.2		●	●																		
SNGN 090404	SNGN 331	9.52	4.76	0.4																					
SNGN 090408	SNGN 332	9.52	4.76	0.8		●									●										
SNGN 090412	SNGN 333	9.52	4.76	1.2							●				●										
SNGN 120404	SNGN 431	12.70	4.76	0.4		●							●												
SNGN 120408	SNGN 432	12.70	4.76	0.8		●	●	●	●	●			●	●	●										
SNGN 120412	SNGN 433	12.70	4.76	1.2		●	●	●	●	●			●	●	●	●									
SNGN 120416	SNGN 434	12.70	4.76	1.6		●	●			●			●	●	●	●	●								
SNGN 120420	SNGN 435	12.70	4.76	2.0		●							●	●	●	●	●								
SNGN 120604	SNGN 441	12.70	6.35	0.4																					
SNGN 120608	SNGN 442	12.70	6.35	0.8		●																			
SNGN 120612	SNGN 443	12.70	6.35	1.2		●																			
SNGN 120616	SNGN 444	12.70	6.35	1.6		●																			
SNGN 120704	SNGN 451	12.70	7.94	0.4			●								●										
SNGN 120708	SNGN 452	12.70	7.94	0.8		●	●	●	●		●		●	●	●		●			●	●	●	●		
SNGN 120712	SNGN 453	12.70	7.94	1.2		●	●	●	●	●	●		●	●	●	●	●	●		●	●	●	●		
SNGN 120716	SNGN 454	12.70	7.94	1.6		●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●		
SNGN 120720	SNGN 455	12.70	7.94	2.0		●	●	●		●	●		●	●	●										
SNGN 150404	SNGN 531	15.87	4.76	0.4			●																		
SNGN 150408	SNGN 532	15.87	4.76	0.8			●																		
SNGN 150412	SNGN 533	15.87	4.76	1.2		●																			
SNGN 150416	SNGN 534	15.87	4.76	1.6		●																			
SNGN 150708	SNGN 552	15.87	7.94	0.8		●																			
SNGN 150712	SNGN 553	15.87	7.94	1.2		●	●																		
SNGN 150716	SNGN 554	15.87	7.94	1.6		●																			
SNGN 190608	SNGN 642	19.05	6.35	0.8										●		●		●		●	●				
SNGN 190612	SNGN 643	19.05	6.35	1.2		●								●				●		●		●			
SNGN 190616	SNGN 644	19.05	6.35	1.6		●								●				●		●	●	●			
SNGN 190712	SNGN 653	19.05	7.94	1.2		●																			
SNGN 190716	SNGN 654	19.05	7.94	1.6		●	●	●	●	●	●		●		●			●		●					
SNGN 190720	SNGN 655	19.05	7.94	2.0		●					●		●												
SNGN 250720	SNGN 854	25.40	7.94	2.0		●							●												
SNGN 250724	SNGN 856	25.40	7.94	2.4		●	●						●	●											
SNGN 250924	SNGN 866	25.40	9.52	2.4		●		●	●		●		●	●	●			●		●					


TURNING INSERT

SNGX

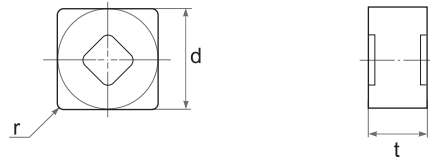


Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
SNGX 120408	SNGX 432	12.70	4.76	0.8																				
SNGX 120412	SNGX 433	12.70	4.76	1.2																				
SNGX 120416	SNGX 434	12.70	4.76	1.6																				
SNGX 120708	SNGX 452	12.70	7.94	0.8																				
SNGX 120712	SNGX 453	12.70	7.94	1.2																				
SNGX 120716	SNGX 454	12.70	7.94	1.6																				
SNGX 150708	SNGX 552	15.87	7.94	0.8																				
SNGX 150712	SNGX 553	15.87	7.94	1.2																				
SNGX 150716	SNGX 554	15.87	7.94	1.6																				

SNMX

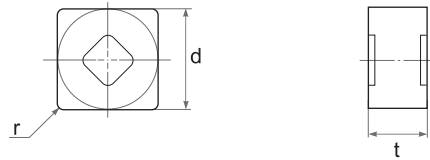

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
SNMX 120712	SNMX 453	12.70	7.94	1.2																				
SNMX 120716	SNMX 454	12.70	7.94	1.6																				



SNMX .. RD

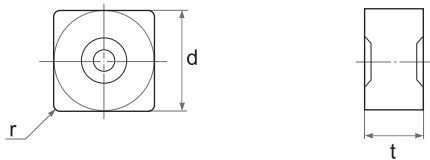

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SD250	SD300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
SNMX 120716 RD	SNMX 454 RD	12.70	7.94	1.6																				


TURNING INSERT

SCGN

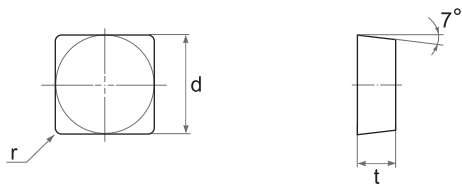


Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
SCGN 090412	SCGN 333	9.52	4.76	1.2																				
SCGN 090416	SCGN 334	9.52	4.76	1.6																				
SCGN 120404	SCGN 431	12.70	4.76	0.4																				
SCGN 120408	SCGN 432	12.70	4.76	0.8																				
SCGN 120412	SCGN 433	12.70	4.76	1.2																				
SCGN 120416	SCGN 434	12.70	4.76	1.6																				

SCGX

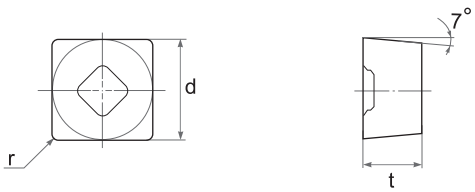

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
SCGX 120616	SCGX 444	12.70	6.35	1.6																				


SCGW

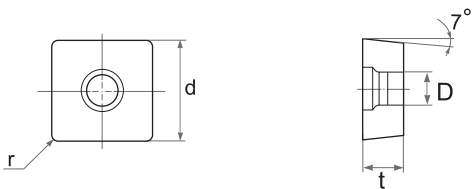

Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	d	t	r	D																				
SCGW 09T304	9.52	3.97	0.4	4.40																				
SCGW 09T308	9.52	3.97	0.8	4.40																				
SCGW 120408	12.70	4.76	0.8	5.50																				



TURNING INSERT

SPGN

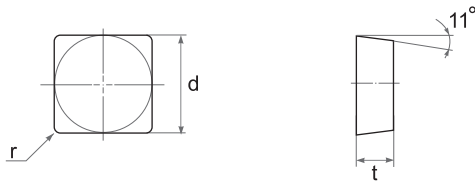



Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
SPGN 090304	SPGN 321	9.52	3.18	0.4	●	●						●									●	●		
SPGN 090308	SPGN 322	9.52	3.18	0.8	●	●			●				●	●	●						●	●		
SPGN 090312	SPGN 323	9.52	3.18	1.2	●																			
SPGN 120304	SPGN 421	12.70	3.18	0.4	●	●																		
SPGN 120308	SPGN 422	12.70	3.18	0.8	●	●		●		●		●		●										
SPGN 120312	SPGN 423	12.70	3.18	1.2	●	●			●			●		●		●								
SPGN 120404	SPGN 431	12.70	4.76	0.4																				
SPGN 120408	SPGN 432	12.70	4.76	0.8	●	●	●					●		●							●	●		
SPGN 120412	SPGN 433	12.70	4.76	1.2	●	●			●			●	●	●	●	●					●	●		
SPGN 120416	SPGN 434	12.70	4.76	1.6	●	●			●				●	●	●						●	●		
SPGN 150408	SPGN 532	15.87	4.76	0.8																				
SPGN 150412	SPGN 533	15.87	4.76	1.2		●							●											
SPGN 190412	SPGN 633	19.05	4.76	1.2	●																			
SPGN 190416	SPGN 634	19.05	4.76	1.6	●	●																		

SPGN .. CR

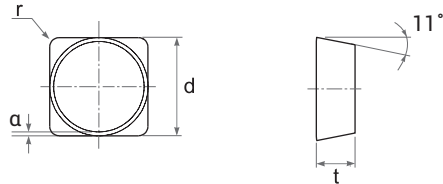

Type		Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	a	CR																				
SNHN 120412 CR05	SNHN 433 CR05	12.70	4.76	1.20	0.492	5°	●	●							●	●	●							●	●	



SNHN .. CR

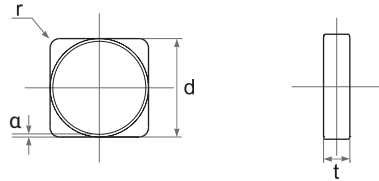

Type		Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	α	CR																				
SNHN 090412 CR10	SNHN 333 CR10	9.52	4.76	1.20	0.50	10°	●								●	●	●							●	●	
SNHN 120312 CR10	SNHN 423 CR10	12.70	3.18	1.20	0.50	10°																				
SNHN 120312 CR15	SNHN 423 CR10	12.70	3.18	1.20	0.50	15°																				
SNHN 120412 CR10	SNHN 433 CR10	12.70	4.76	1.20	0.50	10°																				
SNHN 120412 CR15	SNHN 433 CR10	12.70	4.76	1.20	0.50	15°																				

TURNING INSERT



TNGA

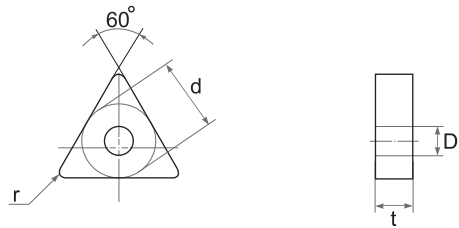

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	D																				
TNGA 110304	TNGA 221	6.35	3.18	0.4	2.26	●	●																		
TNGA 110308	TNGA 222	6.35	3.18	0.8	2.26	●	●																		
TNGA 160304	TNGA 321	9.52	3.18	0.4	3.81	●	●																		
TNGA 160308	TNGA 322	9.52	3.18	0.8	3.81	●	●				●		●												
TNGA 160312	TNGA 323	9.52	3.18	1.2	3.81	●	●																		
TNGA 160404	TNGA 331	9.52	4.76	0.4	3.81	●	●	●	●	●			●	●	●	●		●		●		●			
TNGA 160408	TNGA 332	9.52	4.76	0.8	3.81	●	●	●	●	●			●	●	●	●		●		●	●	●			
TNGA 160412	TNGA 333	9.52	4.76	1.2	3.81	●	●	●	●	●			●	●	●	●		●		●					
TNGA 160416	TNGA 334	9.52	4.76	1.6	3.81	●	●	●			●		●	●	●	●		●		●					
TNGA 220404	TNGA 431	12.70	4.76	0.4	5.16	●	●						●												
TNGA 220408	TNGA 432	12.70	4.76	0.8	5.16	●	●						●		●			●		●					
TNGA 220412	TNGA 433	12.70	4.76	1.2	5.16	●	●						●		●			●		●					
TNGA 220416	TNGA 434	12.70	4.76	1.6	5.16	●	●					●		●		●									
TNGA 220708	TNGA 452	12.70	7.94	0.8	5.16	●	●																		
TNGA 220712	TNGA 453	12.70	7.94	1.2	5.16	●																			
TNGA 270608	TNGA 542	15.87	6.35	0.8	6.35		●																		
TNGA 270612	TNGA 543	15.87	6.35	1.2	6.35		●																		
TNGA 330924	TNGA 666	19.05	9.52	2.4	7.94		●																		

TURNING INSERT



TNGN



Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
TNGN 110304	TNGN 221	6.35	3.18	0.4	●	●						●												
TNGN 110308	TNGN 222	6.35	3.18	0.8	●	●				●		●	●											
TNGN 160404	TNGN 331	9.52	4.76	0.4	●	●			●	●		●												
TNGN 160408	TNGN 332	9.52	4.76	0.8	●	●	●	●	●	●		●	●	●		●					●	●		
TNGN 160412	TNGN 333	9.52	4.76	1.2	●	●	●	●				●	●	●						●	●			
TNGN 160416	TNGN 334	9.52	4.76	1.6	●	●	●	●	●			●	●	●										
TNGN 160704	TNGN 351	9.52	7.94	0.4	●																			
TNGN 160708	TNGN 352	9.52	7.94	0.8	●	●			●				●											
TNGN 160712	TNGN 353	9.52	7.94	1.2	●	●				●		●	●											
TNGN 160716	TNGN 354	9.52	7.94	1.6	●	●						●												
TNGN 220404	TNGN 431	12.70	4.76	0.4	●																			
TNGN 220408	TNGN 432	12.70	4.76	0.8	●	●						●		●			●			●	●			
TNGN 220412	TNGN 433	12.70	4.76	1.2	●	●						●	●	●			●			●	●			
TNGN 220416	TNGN 434	12.70	4.76	1.6		●						●	●	●						●	●			
TNGN 220708	TNGN 452	12.70	7.94	0.8	●																			
TNGN 220712	TNGN 453	12.70	7.94	1.2		●																		
TNGN 220716	TNGN 454	12.70	7.94	1.6		●										●								
TNGN 270608	TNGN 542	15.87	6.35	0.8	●	●																		
TNGN 270612	TNGN 543	15.87	6.35	1.2	●	●																		
TNGN 270616	TNGN 544	15.87	6.35	1.6		●																		
TNGN 330924	TNGN 666	19.05	9.52	2.4		●																		
TNGN 440932	TNGN 868	25.40	9.52	3.2	●	●						●												

TURNING INSERT



TCUN



Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
TCUN 160408	TCUN 332	9.52	4.76	0.8		●							●	●										
TCUN 160412	TCUN 333	9.52	4.76	1.2		●							●	●										
TCUN 160416	TCUN 334	9.52	4.76	1.6		●							●											



TURNING INSERT

TPGN

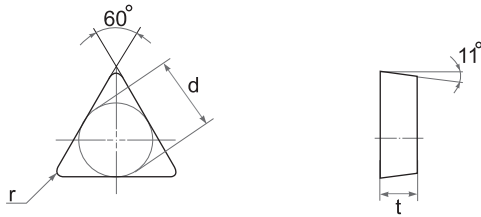

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
TPGN 090204	TPGN 731	5.56	2.38	0.4		●																		
TPGN 090208	TPGN 732	5.56	2.38	0.8		●																		
TPGN 110304	TPGN 221	6.35	3.18	0.4	●	●			●			●		●										
TPGN 110308	TPGN 222	6.35	3.18	0.8	●	●			●			●	●	●			●		●	●	●			
TPGN 160304	TPGN 321	9.52	3.18	0.4	●	●	●		●	●		●		●										
TPGN 160308	TPGN 322	9.52	3.18	0.8	●	●			●	●		●	●	●	●		●		●	●	●			
TPGN 160312	TPGN 323	9.52	3.18	1.2	●	●								●	●					●	●			
TPGN 160404	TPGN 331	9.52	4.76	0.4	●		●																	
TPGN 160408	TPGN 332	9.52	4.76	0.8	●	●											●		●					
TPGN 160412	TPGN 333	9.52	4.76	1.2	●												●		●					
TPGN 160416	TPGN 334	9.52	4.76	1.6	●																			
TPGN 220404	TPGN 431	12.70	4.76	0.4	●	●																		
TPGN 220408	TPGN 432	12.70	4.76	0.8	●	●						●								●	●			
TPGN 220412	TPGN 433	12.70	4.76	1.2	●	●							●	●										
TPGN 220416	TPGN 434	12.70	4.76	1.6	●	●	●																	
TPGN 220712	TPGN 453	12.70	7.94	1.2																				
TPGN 220716	TPGN 454	12.70	7.94	1.6																				
TPGN 271232	TPGN 588	15.87	12.70	3.2		●																		



TPUN

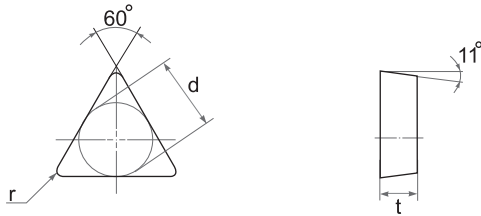

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
TPUN 110308	TPUN 222	6.35	3.18	0.8										●										
TPUN 110312	TPUN 223	6.35	3.18	1.2										●										


TURNING INSERT

VNGA

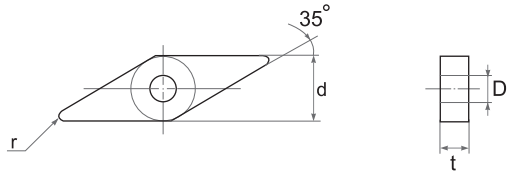

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	D																				
VNGA 160404	VNGA 331	9.52	4.76	0.4	3.81	●	●	●					●												
VNGA 160408	VNGA 332	9.52	4.76	0.8	3.81	●	●	●	●			●	●	●	●	●		●		●					
VNGA 160412	VNGA 333	9.52	4.76	1.2	3.81	●	●	●	●			●	●	●	●	●									
VNGA 160604	VNGA 341	9.52	6.35	0.4	3.81	●	●																		
VNGA 160608	VNGA 342	9.52	6.35	0.8	3.81	●	●																		
VNGA 160612	VNGA 343	9.52	6.35	1.2	3.81	●	●																		
VNGA 220404	VNGA 431	12.70	4.76	0.4	5.16	●	●																		
VNGA 220408	VNGA 432	12.70	4.76	0.8	5.16	●	●								●										
VNGA 220412	VNGA 433	12.70	4.76	1.2	5.16	●	●								●										
VNGA 220424	VNGA 436	12.70	4.76	2.4	5.16																●	●			


VNGN

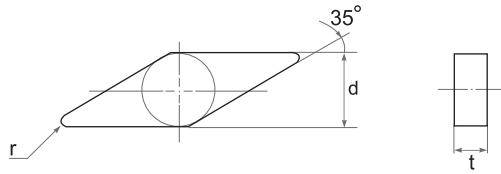

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
VNGN 160404	VNGN 331	9.52	4.76	0.4		●																		
VNGN 160408	VNGN 332	9.52	4.76	0.8		●																		
VNGN 160704	VNGN 351	9.52	7.94	0.4		●																		
VNGN 160708	VNGN 352	9.52	7.94	0.8		●																		
VNGN 160712	VNGN 353	9.52	7.94	1.2																				
VNGN 160716	VNGN 354	9.52	7.94	1.6																				

TURNING INSERT



VNGX

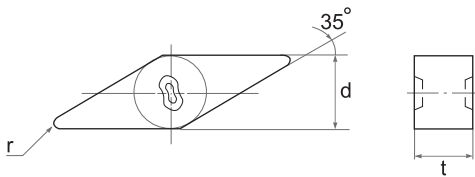

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
VNGX 160708	VNGX 352	9.52	7.94	0.8		●				●				●										
VNGX 160712	VNGX 353	9.52	7.94	1.2		●				●				●		●								
VNGX 160716	VNGX 354	9.52	7.94	1.6										●										


TURNING INSERT

WNGA

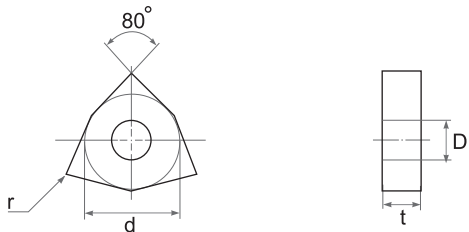

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
WNGA 080404	WNGA 431	12.70	4.76	0.4	5.16	●	●																	
WNGA 080408	WNGA 432	12.70	4.76	0.8	5.16	●	●					●	●	●	●	●	●		●	●	●			
WNGA 080412	WNGA 433	12.70	4.76	1.2	5.16	●	●					●	●	●	●	●	●		●					


WNGX

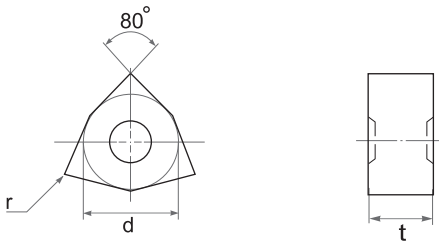

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
WNGX 080708	WNGX 452	12.70	7.94	0.8										●										
WNGX 080712	WNGX 453	12.70	7.94	1.2								●		●	●	●	●		●					
WNGX 080716	WNGX 454	12.70	7.94	1.6										●										

ROLL TURNING INSERT


CDH

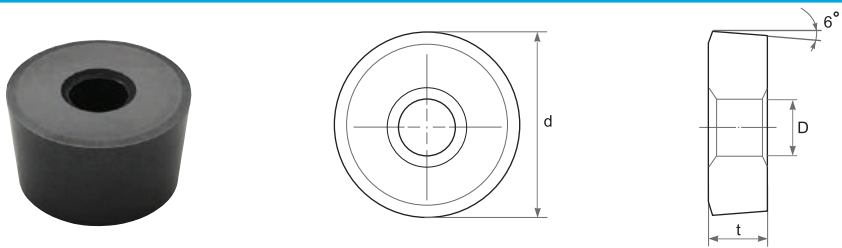

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	D																				
CDH 120600	CDH 22	12.70	6.35	3.18	●	●	●																	
CDH 120900	CDH 23	12.70	9.52	3.18	●																			
CDH 190900	CDH 33	19.05	9.52	6.35	●	●	●	●				●												
CDH 191200	CDH 34	19.05	12.70	6.35	●																			
CDH 251200	CDH 42	25.40	12.70	6.75	●	●	●			●														
CDH 251900	CDH 43	25.40	19.05	6.75	●					●														
CDH 320900	CDH 515	31.75	9.52	10.00	●	●				●		●	●											
CDH 321900	CDH 53	31.75	19.05	10.00	●	●	●	●		●		●	●											
CDH 381100		38.10	11.11	9.93	●																			


ROLL TURNING INSERT

F-Series

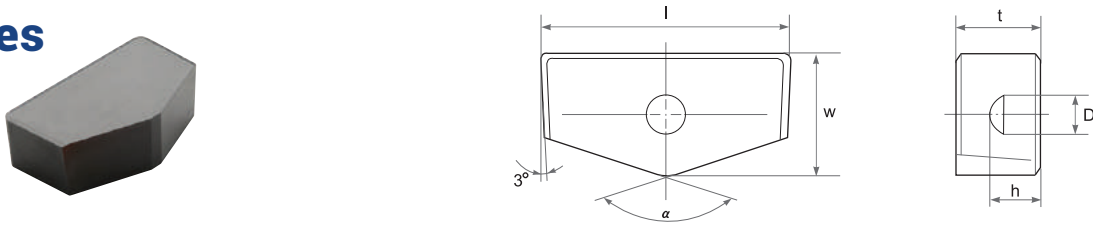


Type		Dimensions (mm)						ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO		l	w	t	D	h	α																				
F 13941		32.00	19.05	12.00	6.50	6.00	120°	●	●				●		●	●											
F 10537		44.50	25.40	14.20	6.50	7.00	120°	●	●				●		●	●											

F-Series

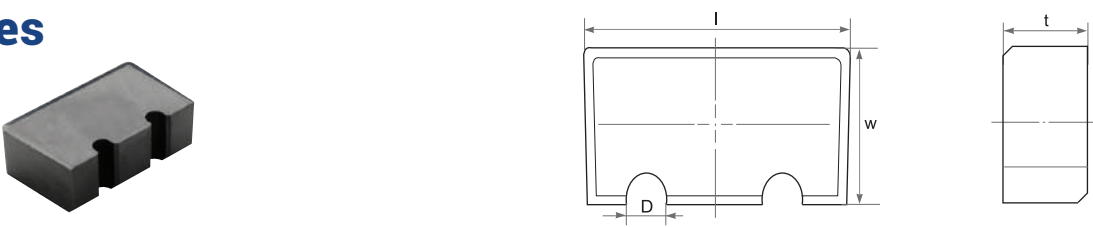


Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	l	w	t	D																				
F 10537 V	44.00	26.00	15.00	5.00	●	●				●														

F-Series

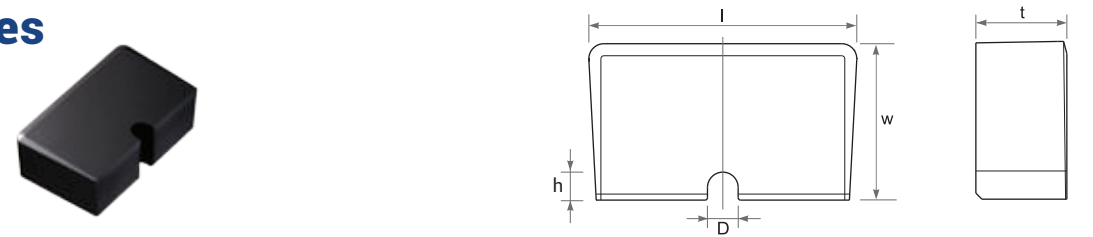

Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	l	w	t	D	h																				
F 10537 S	44.55	26.00	15.00	5.10	4.60	●	●				●														


F-Series

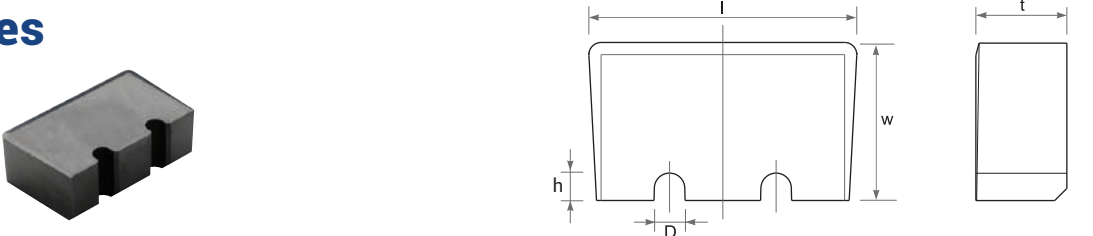

Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	l	w	t	D	h																				
F 10537 VW	44.00	25.95	15.00	5.10	4.50	●	●				●														



ROLL TURNING INSERT

F-Series

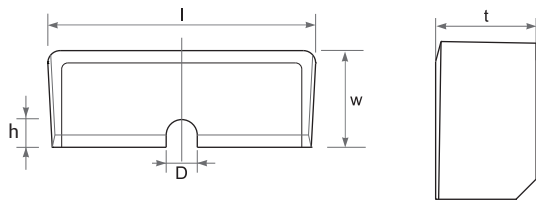


Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	l	w	t	D	h																				
F 431016 S	43.50	15.70	10.00	5.05	4.50	●	●				●														

F-Series

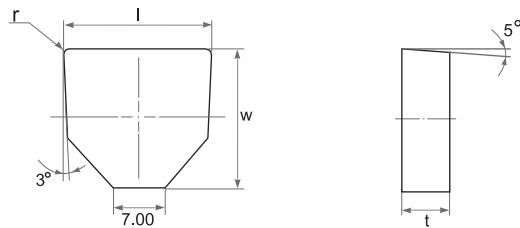

Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	l	t	r	w																					
F 250723	25.00	7.94	1.20	23.00		●																			


F-Series

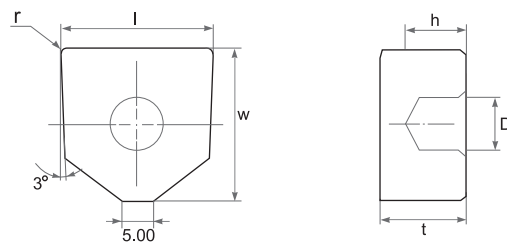

Type	Dimensions (mm)						ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	l	t	r	w	D	h																				
F 251425	25.00	14.40	2.40	25.40	9.17	10.00								●												
F251425 H65	25.00	14.40	2.40	25.40	6.50	10.00								●												


ROLL TURNING INSERT

LNJ

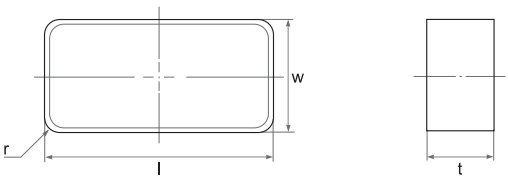

Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	l	w	t	r																				
LNJ 5464	25.40	15.87	9.52	1.6	●	●																		
LNJ 5568	31.75	15.87	9.52	3.2								●												
LNJ 6588	31.75	19.05	12.70	3.2	●	●	●	●		●		●	●											
LNJ 6688	38.10	19.05	12.70	3.2	●	●	●	●		●		●	●				●		●	●				
LNJ 6898	48.10	21.05	12.70	3.2								●												



SNGN3812R

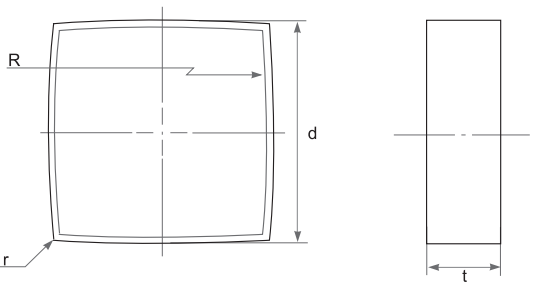

Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	d	t	r	R																				
SNGN 3812R	38.10	12.70	0.4	114	●	●	●																	



ROLL TURNING INSERT

RBGX



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO		d	t	T	a																				
RBGX 06T		6.00	5.00	3.00	3.00	●	●																		
RBGX 08T		8.00	6.50	4.00	4.00	●	●																		
RBGX 10T		10.00	9.00	6.00	6.00		●																		
RBGX 12T		12.00	9.00	6.00	6.00	●	●																		
RBGX 16T		16.00	13.00	8.00	8.00	●	●																		
RBGX 20T		20.00	15.00	10.00	10.00	●	●	●	●																
RBGX 26T		26.00	15.00	10.00	14.00	●	●																		



RCGX



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	T	α																				
RCGX 060400	RCGX 102	6.35	4.76	4.57	120°	●	●											●		●	●	●			
RCGX 060600	RCGX 102	6.35	6.35	6.20	120°	●	●	●	●									●		●					
RCGX 060700	RCGX 102	6.35	7.94	7.70	120°	●	●	●	●				●					●		●					
RCGX 090700	RCGX 103	9.52	7.94	7.70	120°	●	●	●	●				●					●		●	●	●			
RCGX 120700	RCGX 104	12.70	7.94	7.70	120°	●	●	●	●				●					●		●	●	●			
RCGX 151000	RCGX 105	15.87	10.00	9.77	120°	●	●	●	●				●					●		●					
RCGX 191000	RCGX 106	19.05	10.00	9.77	120°	●	●	●	●				●					●		●					
RCGX 251200	RCGX 108	25.40	12.00	11.85	140°	●	●	●	●				●					●		●					



ROLL TURNING INSERT

RPGX



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	T	α																				
RPGX 060400	RPGX 102	6.35	4.76	4.57	120°																●	●			
RPGX 090700	RPGX 103	9.52	7.94	7.70	120°														●	●	●	●			
RPGX 120700	RPGX 104	12.70	7.94	7.70	120°														●	●	●	●			


RXGX



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO		d	t	a																					
RXGX 1207MO		12.00	7.94	6.90			●																		
RXGX 1608MO		16.00	8.00	9.50			●				●														
RXGX 2508MO		25.00	8.00	18.20		●					●														


GROOVING INSERT

SYBF

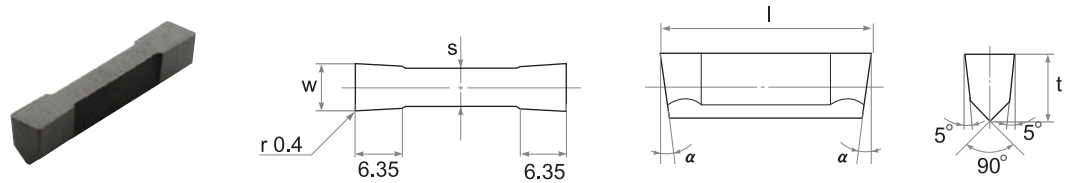


Type	Dimensions (mm)						ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t	s	α																				
SYBF 3228		28.58	3.18	6.35	2.69	5.0°	●	●																		
SYBF 4828		28.58	4.78	6.35	3.66	5.0°	●	●																		
SYBF 5528		28.58	5.54	6.35	3.66	5.0°																				
SYBF 6428		28.58	6.35	8.56	5.13	7.0°	●	●																		
SYBF 7928		28.58	7.93	8.56	5.13	7.0°	●	●																		
SYBF 9528		28.58	9.53	8.56	6.99	7.0°																				

SYBF .. K

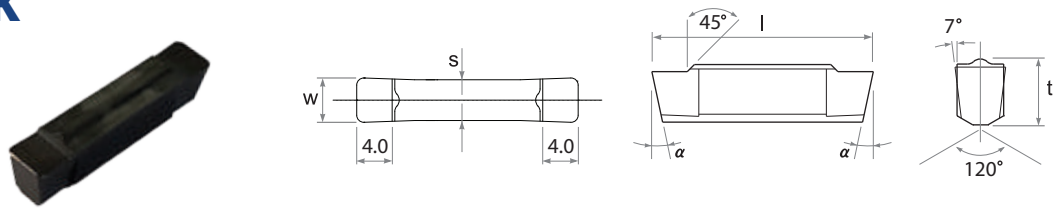

Type	Dimensions (mm)						ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t	s	α																				
SYBF 5025K		25.00	5.00	6.50	4.60	12°										●		●								


SYBR

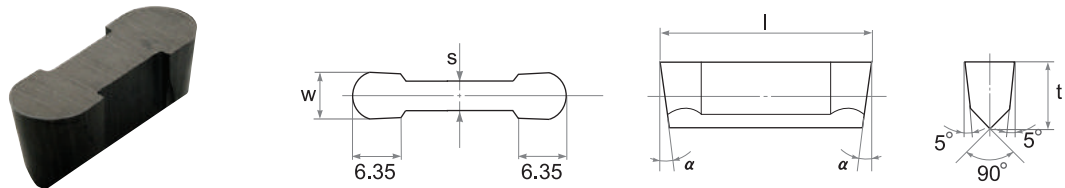

Type	Dimensions (mm)						ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t	s	α																				
SYBR 3228		28.58	3.18	6.35	2.69	5.0°	●	●																		
SYBR 4828		28.58	4.78	6.35	3.66	5.0°	●	●																		
SYBR 5528		28.58	5.54	6.35	3.66	5.0°																				
SYBR 6428		28.58	6.35	8.56	5.13	7.0°	●	●																		
SYBR 7928		28.58	7.93	8.56	5.13	7.0°	●	●																		
SYBR 9528		28.58	9.53	8.56	6.99	7.0°																				


GROOVING INSERT

SGF

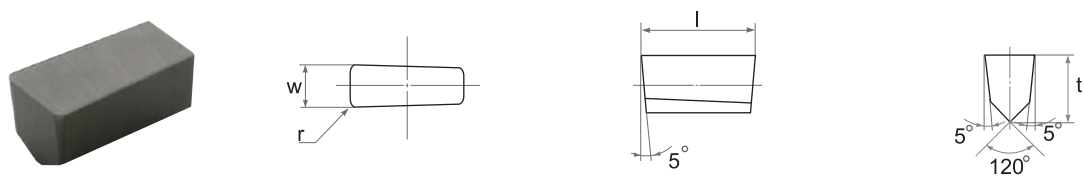

Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t	r																				
SGF 4012		12.00	4.00	5.00	0.50	●	●				●				●										
SGF 5012		12.00	5.00	5.00	0.80	●	●				●														
SGF 6015		15.00	6.00	7.50	0.80	●	●				●														
SGF 7015		15.00	7.00	7.50	0.80	●	●				●														
SGF 8015		15.00	8.00	7.50	0.80	●	●				●														
SGF 1015		15.00	10.00	7.50	0.80	●	●				●														



SGR

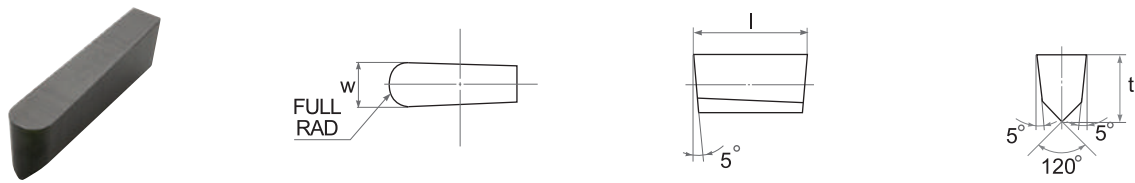

Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t																				
SGR 4012		12.00	4.00	5.00	●	●				●				●										
SGR 5012		12.00	5.00	5.00	●	●				●				●										
SGR 6015		15.00	6.00	7.50	●	●				●														
SGR 7015		15.00	7.00	7.50	●	●				●														
SGR 8015		15.00	8.00	7.50	●	●				●														
SGR 1015		15.00	10.00	7.50	●	●				●														




GROOVING INSERT

SSF



Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t	r																			
SSF 4012	12.00	4.00	5.00	0.80	●	●				●														
SSF 5012	12.00	5.00	5.00	0.80	●	●				●														
SSF 6015	15.00	6.00	7.50	0.80	●	●				●														
SSF 7015	15.00	7.00	7.50	0.80	●	●																		
SSF 8015	15.00	8.00	7.50	0.80	●	●																		
SSF 1015	15.00	10.00	7.50	0.80	●	●																		




SSR



Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t																				
SSR 4012	12.00	4.00	5.00	●	●					●				●										
SSR 5012	12.00	5.00	5.00	●	●					●				●										
SSR 6015	15.00	6.00	7.50	●	●					●														
SSR 7015	15.00	7.00	7.50	●	●					●														
SSR 8015	15.00	8.00	7.50	●	●					●														
SSR 1015	15.00	10.00	7.50	●	●					●														

GROOVING INSERT

WFC






Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t																				
WFC 094050-A	12.70	2.388	4.75	0.40																				
WFC 094050-B	12.70	2.388	4.75	0.80																				
WFC 125050-A	12.70	3.175	4.75	0.40																				
WFC 125050-B	12.70	3.175	4.75	0.80																				
WFC 156050-A	12.70	3.962	4.75	0.40																				
WFC 156050-B	12.70	3.962	4.75	0.80																				
WFC 187050-A	12.70	4.750	4.75	0.40																				
WFC 187050-B	12.70	4.750	4.75	0.80																				
WFC 218075-A	19.05	5.537	6.35	0.40																				
WFC 218075-B	19.05	5.537	6.35	0.80																				
WFC 250075-A	19.05	6.350	6.35	0.40																				
WFC 250075-B	19.05	6.350	6.35	0.80																				
WFC 250075-C	19.05	6.350	6.35	1.20																				
WFC 281075-A	19.05	7.137	6.35	0.40																				
WFC 281075-B	19.05	7.137	6.35	0.80																				
WFC 281075-C	19.05	7.137	6.35	1.20																				
WFC 312100-A	25.40	7.925	8.56	0.40																				
WFC 312100-B	25.40	7.925	8.56	0.80																				
WFC 312100-C	25.40	7.925	8.56	1.20																				
WFC 312100-D	25.40	7.925	8.56	1.60																				
WFC 344100-A	25.40	8.738	8.56	0.40																		●		
WFC 344100-B	25.40	8.738	8.56	0.80																				
WFC 344100-C	25.40	8.738	8.56	1.20																				
WFC 344100-D	25.40	8.738	8.56	1.60																				
WFC 375100-A	25.40	9.525	8.56	0.40																				
WFC 375100-B	25.40	9.525	8.56	0.80																				
WFC 375100-C	25.40	9.525	8.56	1.20																				
WFC 375100-D	25.40	9.525	8.56	1.60																		●		

*The above inserts WFC Series are available only Whisker grade.

GROOVING INSERT

WRC







Type	Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t																			
WRC 094050		12.70	2.388	4.75																			
WRC 125050		12.70	3.175	4.75																			
WRC 156050		12.70	3.962	4.75																			
WRC 187050		12.70	4.750	4.75																			
WRC 218075		19.05	5.537	6.35																			
WRC 250075		19.05	6.350	6.35																			
WRC 281075		19.05	7.137	6.35																			
WRC 312100		25.40	7.925	8.56																			
WRC 344100		25.40	8.738	8.56																			
WRC 375100		25.40	9.525	8.56																			

*The above inserts WRC Series are available only Whisker grade.

GROOVING INSERT

WFP






Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	l	w	t	r																				
WFP 094050-A	12.70	2.388	4.75	0.40																	●			
WFP 094050-B	12.70	2.388	4.75	0.80																				
WFP 125050-A	12.70	3.175	4.75	0.40																	●			
WFP 125050-B	12.70	3.175	4.75	0.80																	●			
WFP 156050-A	12.70	3.962	4.75	0.40																	●			
WFP 156050-B	12.70	3.962	4.75	0.80																	●			
WFP 187050-A	12.70	4.750	4.75	0.40																●	●			
WFP 187050-B	12.70	4.750	4.75	0.80																●	●			
WFP 218075-A	19.05	5.537	6.35	0.40																●	●			
WFP 218075-B	19.05	5.537	6.35	0.80																				
WFP 250075-A	19.05	6.350	6.35	0.40																●	●			
WFP 250075-B	19.05	6.350	6.35	0.80																●	●			
WFP 250075-C	19.05	6.350	6.35	1.20																●	●			
WFP 281075-A	19.05	7.137	6.35	0.40																●	●			
WFP 281075-B	19.05	7.137	6.35	0.80																				
WFP 281075-C	19.05	7.137	6.35	1.20																				
WFP 312100-A	25.40	7.925	8.56	0.40																	●			
WFP 312100-B	25.40	7.925	8.56	0.80																	●			
WFP 312100-C	25.40	7.925	8.56	1.20																	●			
WFP 312100-D	25.40	7.925	8.56	1.60																				
WFP 344100-A	25.40	8.738	8.56	0.40																				
WFP 344100-B	25.40	8.738	8.56	0.80																				
WFP 344100-C	25.40	8.738	8.56	1.20																				
WFP 344100-D	25.40	8.738	8.56	1.60																				
WFP 375100-A	25.40	9.525	8.56	0.40																				
WFP 375100-B	25.40	9.525	8.56	0.80																	●			
WFP 375100-C	25.40	9.525	8.56	1.20																				
WFP 375100-D	25.40	9.525	8.56	1.60																	●			

*The above inserts WFP Series are available only Whisker grade.

GROOVING INSERT

WRP






Type	Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	w	t																			
WRP 094050		12.70	2.388	4.75																			
WRP 125050		12.70	3.175	4.75																			
WRP 156050		12.70	3.962	4.75																			
WRP 187050		12.70	4.750	4.75																			
WRP 218075		19.05	5.537	6.35																			
WRP 250075		19.05	6.350	6.35																			
WRP 281075		19.05	7.137	6.35																			
WRP 312100		25.40	7.925	8.56																			
WRP 344100		25.40	8.738	8.56																			
WRP 375100		25.40	9.525	8.56																			

*The above inserts WRP Series are available only Whisker grade.




GROOVING INSERT

SRG



Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	d	l	t																				
SRG 1510		9.896	15.875	6.35	0.8																			
SRG 1512		12.206	15.875	6.35	0.8																			
SRG 1513		12.580	15.875	6.35	0.8																			
SRG 1914		14.370	19.050	6.35	0.8																			
SRG 1915		15.506	19.050	6.35	0.8																			


SRGA



Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	d	l	t																				
SRGA 2216		16.741	22.200	6.35	0.8																			
SRGA 2218		18.300	22.225	6.35	0.8																			
SRGA 2522		22.700	25.700	7.94	0.8																			
SRGA 2518		17.802	25.400	6.35	0.8																			
SRGA 3819		19.630	38.100	6.35	0.8																			


MILLING INSERT

HNEN

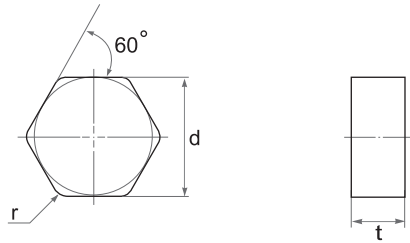

Type	Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	d	t	r																			
HNEN 090520		16.20	5.56	2.0								●	●										
HNEN 090530		16.20	5.56	3.0								●	●										
HNEN 0905 ANSN		15.87	5.64	0.8								●	●		●								


LNE

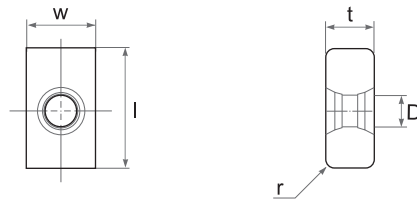

Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	l	w	t	D	r																				
LNE 040904	15.87	9.52	4.76	4.41	0.4									●	●										
LNE 040908	15.87	9.52	4.76	4.41	0.8									●	●										
LNE 040912	15.87	9.52	4.76	4.41	1.2									●	●										
LNE 1007	15.67	9.52	6.35	4.10	1.2									●	●										


MILLING INSERT

OEGB

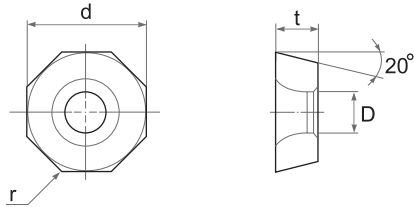


Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	d	t	D	r																			
OEGB 070408		15.87	4.76	5.18	0.8								●	●										
OEGB 070416		15.87	4.76	5.18	1.6								●	●		●								

OEGB .. CR

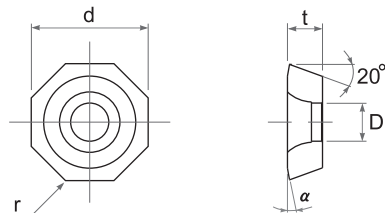

Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	d	t	D	r	α																				
OEGB 070408 0003 CR	15.87	4.76	5.18	0.80	10°									●	●										
OEGB 070416 0003 CR	15.87	4.76	5.18	1.60	10°									●	●										
OEGB 070516 0003 CR	15.87	5.56	5.18	1.60	10°									●	●										


OPEN

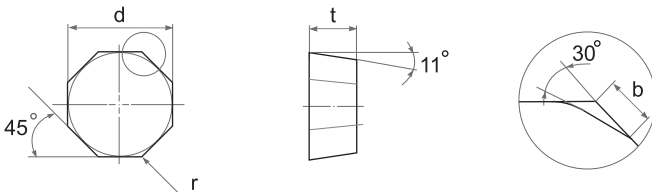

Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	d	t	r	b																			
OPEN 050408 TR		13.97	4.76	0.80	2.10									●										
OPEN 050608 TR		13.97	6.35	0.80	2.10									●		●								


MILLING INSERT

SNCN

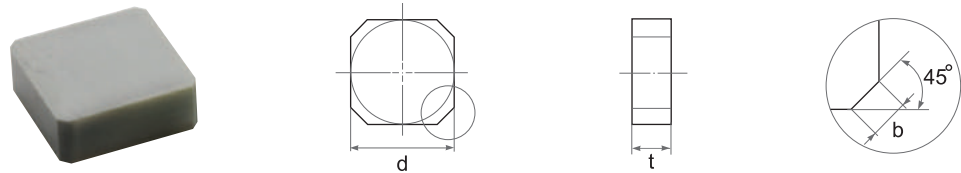


Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	b																				
SNCN 1204 AN	SNCN 43 AN	12.70	4.76	2.50																				
SNCN 1204 ZN	SNCN 43 ZN	12.70	4.76	1.10																				

SNCN .. ENTN

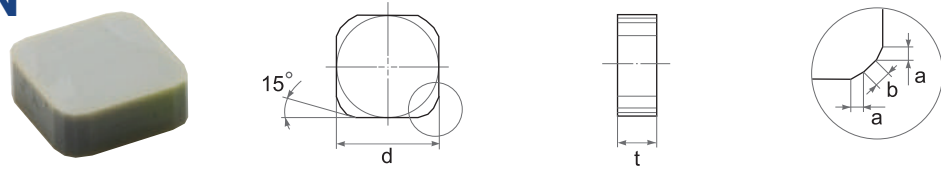

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SNCN 1204 ENTN	SNCN 43 ENTN	12.70	4.76	1.40	1.00																				
SNCN 1504 ENTN	SNCN 53 ENTN	15.87	4.76	1.40	1.00																				


SNGN .. ING

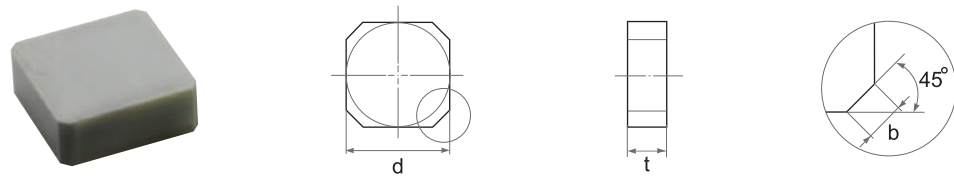

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	b																				
SNGN 1204 ING	SNGN 43 ING	12.70	4.76	1.50																				
SNGN 1904 ING	SNGN 63 ING	19.05	4.76	2.50																				


MILLING INSERT

SDCN

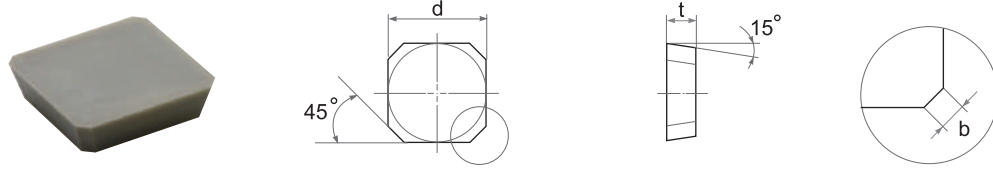


Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	b																				
SDCN 1203 AETN 12	SDCN 42 AETN 12	12.70	3.18	1.2																				
SDCN 1203 AETN	SDCN 42 AETN	12.70	3.18	2.0																				
SDCN 1504 AETN	SDCN 53 AETN	15.87	4.76	2.0																				

SDCN .. T

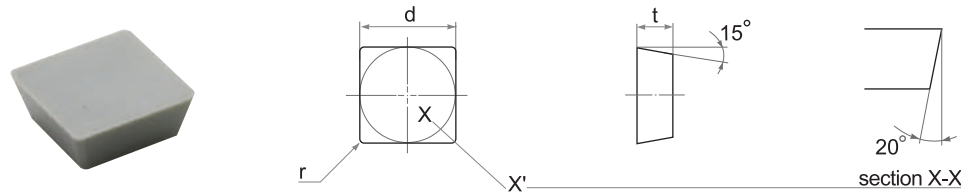

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
SDCN 120408 T20	SDCN 432 T20	12.70	4.76	0.8																				
SDCN 120412 T20	SDCN 433 T20	12.70	4.76	1.2																				


SDCW

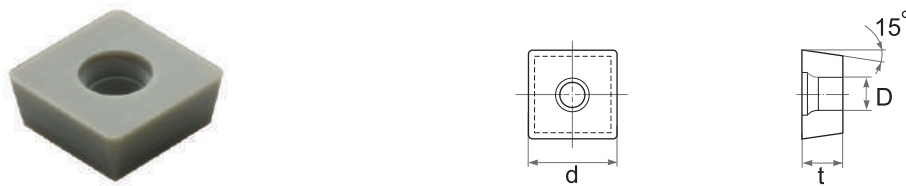

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	D																				
SDCW 1204 PDSR	SDCW 43 PDSR	12.70	4.76	4.40																				


MILLING INSERT

SEAN

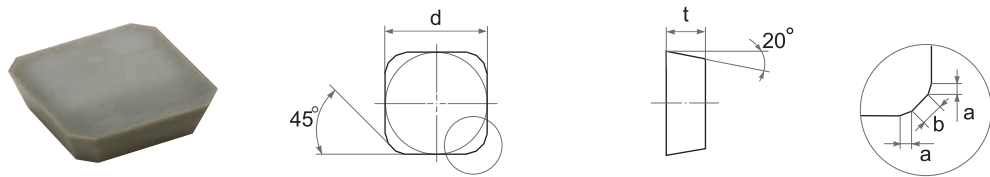


Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SEAN 1203 AFTN	SEAN 42 AFTN	12.70	3.18	0.50	1.80								●	●	●										
SEAN 1504 AFTN	SEAN 53 AFTN	12.70	4.76	0.70	2.00								●	●	●										

SEAN .. NW

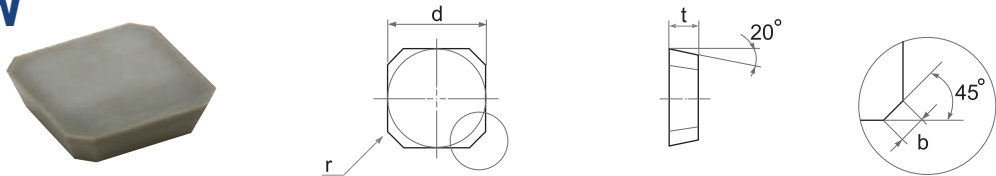

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	b	r																				
SEAN 1203 NWAFTN	SEAN 42 NWAFTN	12.70	3.18	2.40	0.4								●												
SEAN 1204 AFTNW25	SEAN 43 AFTNW25	12.70	4.76	2.50	1.2										●										


SEAN .. T

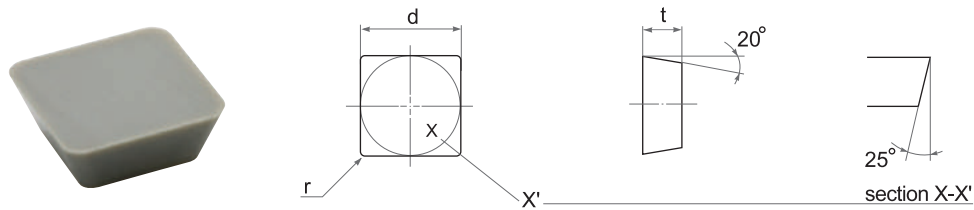

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SEAN 120412 T25	SEAN 433 T25	12.70	4.76	1.2											●			●							
SEAN 120416 T25	SEAN 434 T25	12.70	4.76	1.6											●			●							

MILLING INSERT

SPCN .. T

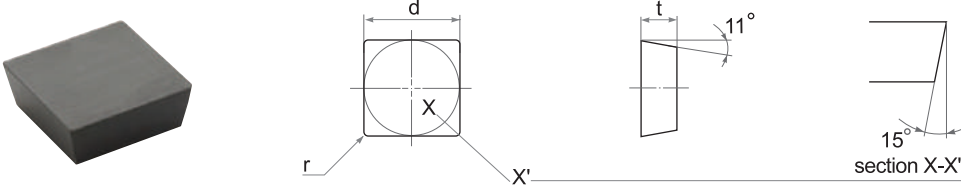


Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																					
SPCN 120412 T15	SPCN 433 T15	12.70	4.76	1.2											●										
SPCN 120416 T15	SPCN 434 T15	12.70	4.76	1.6											●										

SPCW



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	D																					
SPCW 10T3ZX	SPCW 10T3ZX	10.00	3.97	3.52											●										


SPEN

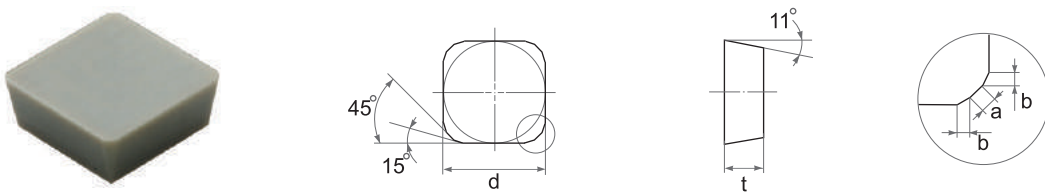

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SPEN 1206 APTN	SPEN 44 APTN	12.70	6.35	1.20	1.20										●		●								


MILLING INSERT

SPHX

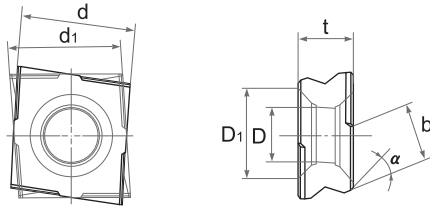


Type	Dimensions (mm)							ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	d	d _i	t	D	D _i	α	b																				
SPHX 1205NR 480T	11.67	11.33	5.50	5.10	8.41	45	8.0										●		●								
SPHX 1205NL 480T	11.67	11.33	5.50	5.10	8.41	45	8.0																				
SPHX 1205ER 855T	12.09	11.33	5.50	5.10	8.41	35	5.50										●		●								
SPHX 1205EL 855T	12.09	11.33	5.50	5.10	8.41	35	5.50										●										
SPHX 15T6NR 880T	14.58	14.33	6.60	6.10	10.18	45	8.80										●		●								
SPHX 15T6ER 865T	15.50	14.33	6.60	6.10	10.18	35	6.50										●		●								

SPKN

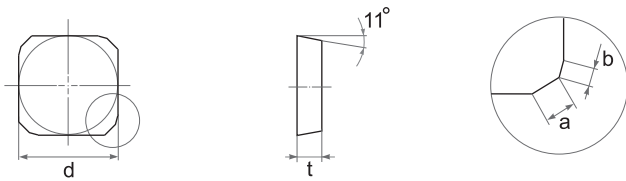

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SPKN 1203 EDTR	SPKN 42 EDTR	12.70	3.18	1.40	1.00										●										
SPKN 1504 EDTR	SPKN 53 EDTR	15.87	4.76	1.40	1.00										●		●								


SPKN .. SP

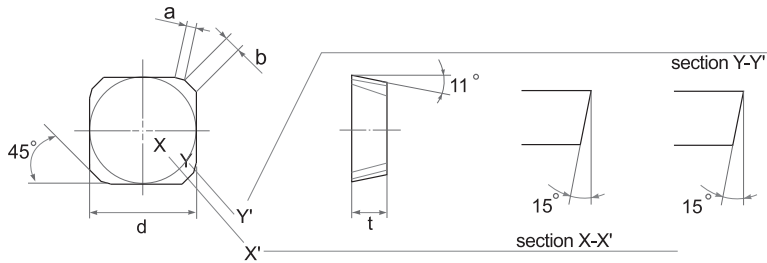

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SPKN 1204SP EDTR	SPKN 43SP EDTR	12.70	4.76	1.10	1.30																				



MILLING INSERT

TNCN

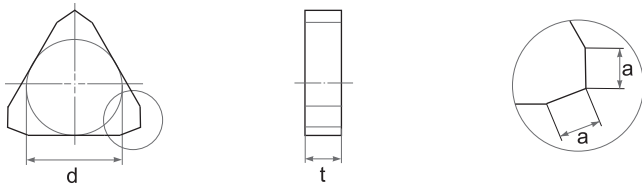



Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a																				
TNCN 2204 ANT	TNCN 43 ANT	12.70	4.76	2.60									●	●										

TEKN

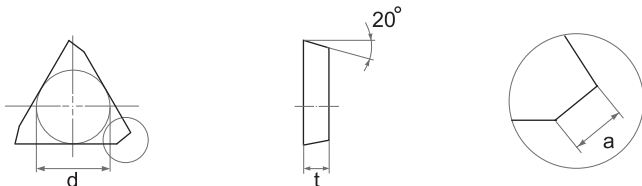

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a																				
TEKN 1603 PFTR	TEKN 32 PFTR	9.52	3.18	1.40									●	●										
TEKN 2204 PFTR	TEKN 43 PFTR	12.70	4.76	2.10									●	●										


TPKN

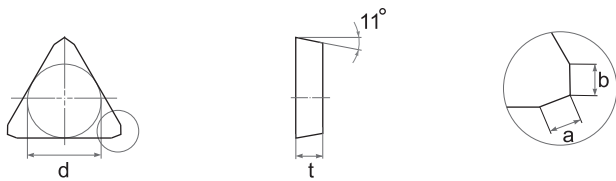

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
TPKN 1603 PDTR	TPKN 32 PDTR	9.52	3.18	1.20	1.00									●	●										
TPKN 2204 PDTR	TPKN 43 PDTR	12.70	4.76	1.40	0.70									●	●										


WIPER INSERT

CNGN .. AZ

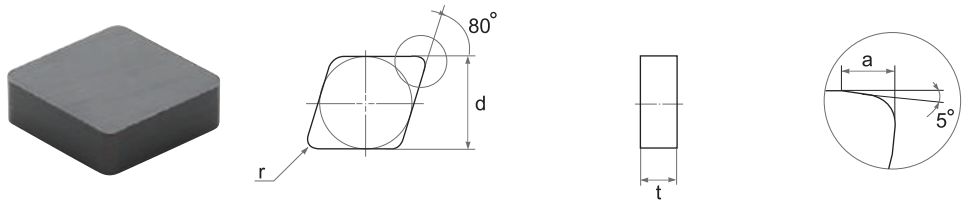


Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r	a																				
CNGN 1204 AZ	CNGN 43 AZ	12.70	4.76	1.0	1.60	●									●										

ADVANTAGE OF WIPER INSERT

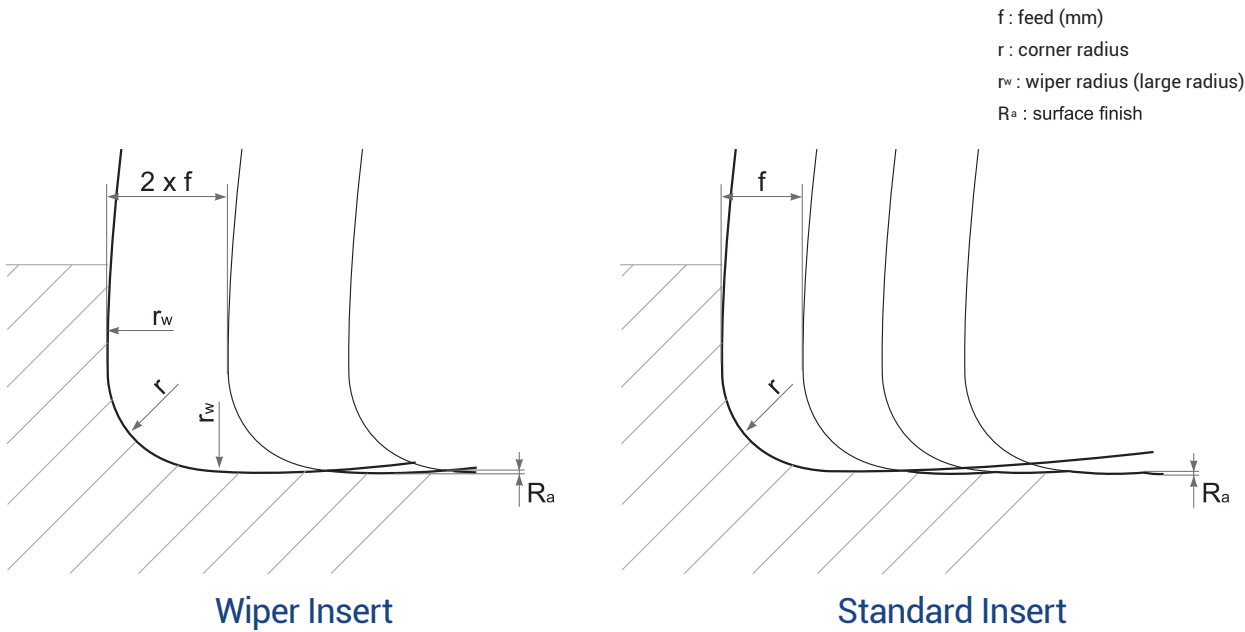


WIPER INSERT

SNCN .. ZZT

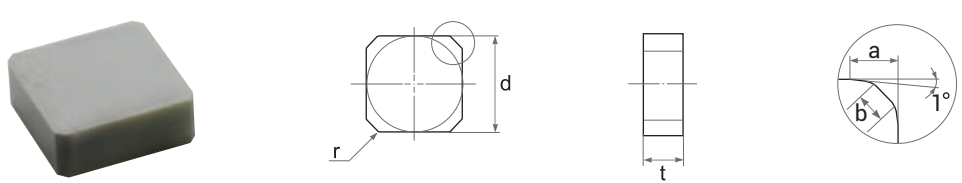


Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SNCN 0904 ZZT	SNCN 33 ZZT	9.52	4.76	1.30	1.10										●	●									
SNCN 1204 ZZT	SNCN 43 ZZT	12.70	4.76	3.25	1.10		●								●	●									

SNCN .. GZ

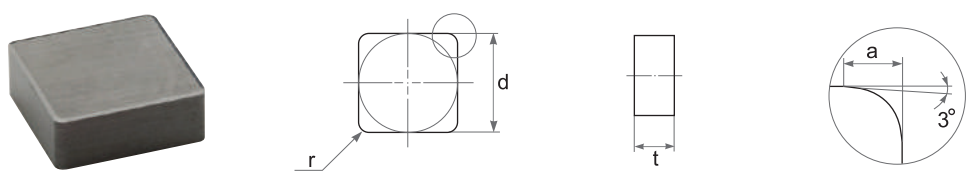

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SNCN 0904 GZ	SNCN 33 GZ	9.52	4.76	0.8	1.00										●										




SNCN .. KZ

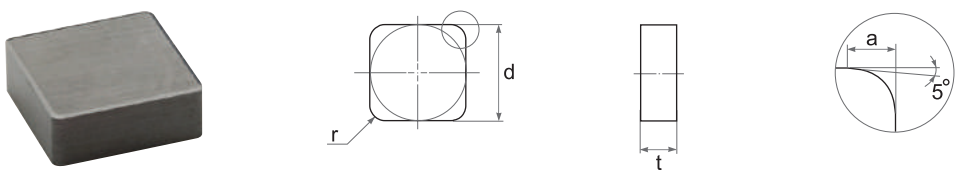

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SNCN 1204 KZ	SNCN 43 KZ	12.70	4.76	1.2	1.80										●										





WIPER INSERT

SCGN .. WZ






Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SCGN 0904 WZ	SCGN 33 WZ	9.52	4.76	0.8	1.60										●										
SCGN 1204 WZ	SCGN 43 WZ	12.70	4.76	0.8	1.60										●										

SCGN .. XZ



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SCGN 0904 XZ	SCGN 33 XZ	9.52	4.76	0.8	1.20										●										
SCGN 1204 XZ	SCGN 43 XZ	12.70	4.76	0.8	1.20										●										




SCGN .. ZZ



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SCGN 0904 ZZ	SCGN 33 ZZ	9.52	4.76	0.8	1.00										●										
SCGN 1204 ZZ	SCGN 43 ZZ	12.70	4.76	0.8	1.00										●										




WIPER INSERT

SCGN .. MZ



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b																				
SCGN 0904 MZ	SCGN 33 MZ	9.52	4.76	0.8	1.80										●										
SCGN 1204 MZ	SCGN 43 MZ	12.70	4.76	0.8	1.80										●										


SCGN .. ZZM



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	a	b	R																			
SCGN 0904 ZZM	SCGN 33 ZZM	9.52	4.76	1.23	5°	0.8														●					


SPECIAL INSERT

SVW

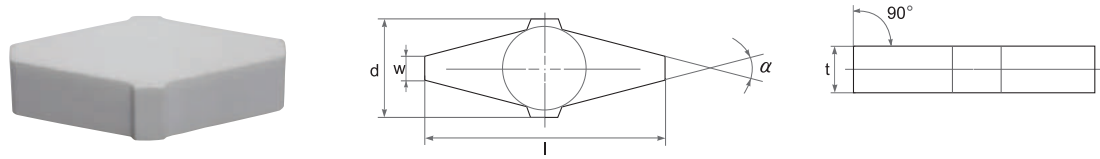

Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	α	d	t																				
SVW 38260		26.00	38°	11.5	7.94	2.23					●														
SVW 38320		32.00	38°	14.5	7.94	3.22					●														
SVW 34400		40.00	34°	18.5	7.94	5.07					●														


GVGN

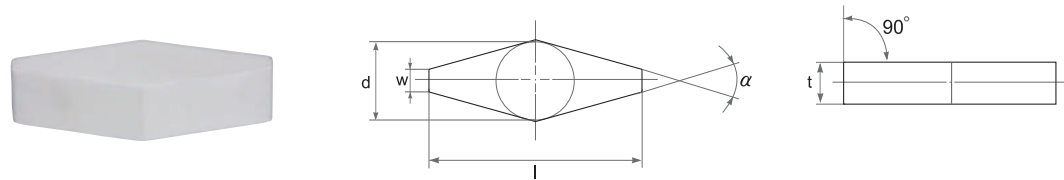

Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	l	α	d	t																				
GVGN 38320		32.00	38°	13.46	7.94	3.22					●														
GVGN 38335		33.50	38°	13.28	8.00	3.06					●														
GVGN 36340		34.00	36°	13.59	7.94	3.25					●														
GVGN 38360		36.00	38°	17.38	7.94	5.98					●														
GVGN 34360		36.00	34°	17.42	7.94	7.22					●														


SPECIAL INSERT

SZT 5810

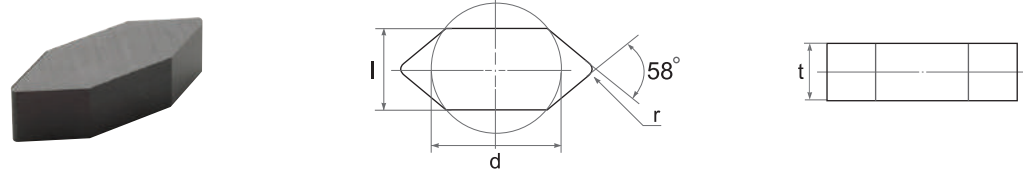

Type	Dimensions (mm)				ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	d	l	t	r																			
SZT 581004		14.70	10.00	7.94	0.4	●	●																	
SZT 581008		14.70	10.00	7.94	0.8	●	●																	
SZT 581012		14.70	10.00	7.94	1.2	●	●																	


SNMX

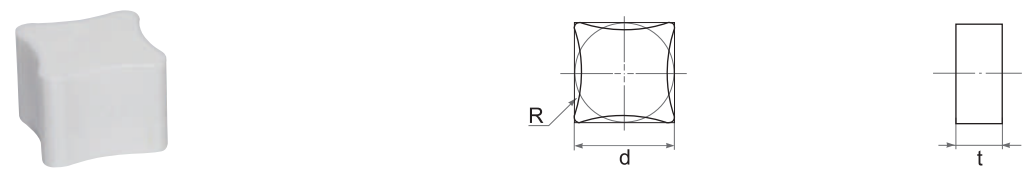

Type	Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	d	t	R																			
SNMX 121007		12.70	10.00	7.0					●														
SNMX 121009		12.70	10.00	9.0					●														
SNMX 121012		12.70	10.00	12.0					●														
SNMX 121015		12.70	10.00	15.0					●														
SNMX 121020		12.70	10.00	20.0					●														
SNMX 121025		12.70	10.00	25.0					●														
SNMX 121030		12.70	10.00	30.0					●														
SNMX 121040		12.70	10.00	40.0					●														
SNMX 121050		12.70	10.00	50.0					●														


SPECIAL INSERT

SNGF

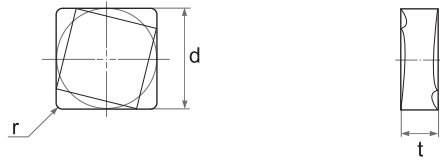

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	ASA	d	t	r																				
SNGF 120412	SNGF 433	12.70	4.76	1.2																				


INGN

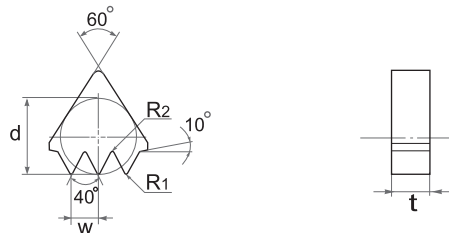

Type	Dimensions (mm)					ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
ISO	d	t	w	R ₁	R ₂																				
INGN 160435 F303	9.52	4.76	3.56	0.5	0.3						●														
INGN 160435 F304	9.52	4.76	3.56	0.5	0.4						●														
INGN 220435 F403	12.70	4.76	3.56	0.5	0.3						●														
INGN 220435 F404	12.70	4.76	3.56	0.5	0.4						●														

SPECIAL INSERT


ENDMILL (FINISHED)

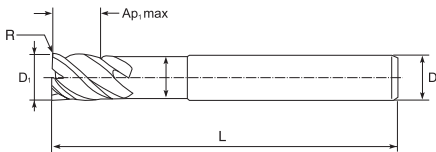

Type	Flute	Mill Diameter x Corner R	Length of Cut	Effective Length	Neck Diameter	Overall Length	Shank Diameter	SN1000	SW800
	F	ø D ₁ xR	L ₁	L ₂	ø d ₂	L	øD		
SYC 6040 R0.5	4	ø6 X R 0.5	4.5	12	5.8	60	ø6		
SYC 8040 R1.0	4	ø8 X R 1.0	6	16	7.7	60	ø8		
SYC 10040 R1.25	4	ø10 X R 1.25	7.5	20	9.7	65	ø10		
SYC 12040 R1.5	4	ø12 X R 1.5	9	24	11.7	70	ø12		
SYC 6060 R0.5	6	ø6 X R 0.5	4.5	12	5.8	60	ø6		
SYC 8060 R1.0	6	ø8 X R 1.0	6	16	7.7	60	ø8		
SYC 10060 R1.25	6	ø10 X R 1.25	7.5	20	9.7	65	ø10		
SYC 12060 R1.5	6	ø12 X R 1.5	9	24	11.7	70	ø12		

SPECIAL INSERT

ENDMILL (BLANK)




Type	Dimensions (mm)		ST100	ST300	ST500	ST900	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN950	SN1000	SW400	SW800	Coated ST	Coated SN	Coated SW
	ISO	D	L																			
ROD 060-600S		6	60																			
ROD 080-600S		8	60																			
ROD 100-650S		10	65																			
ROD 100-720S		10	72																			
ROD 120-700S		12	70																			
ROD 140-850S		14	85																			
ROD 160-900S		16	90																			
ROD 180-1000S		18	100																			
ROD 200-1050S		20	105																			

* Remarks : Available upon customer request

MEMO


CERMET

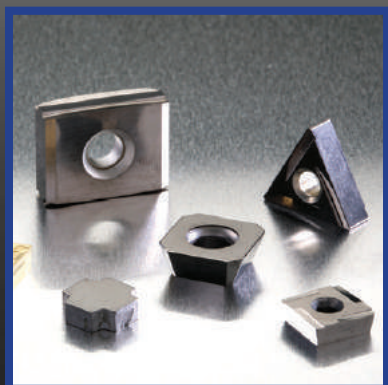


Turning	A 86
Milling	A 97
Special	A 102

TURNING INSERT


CNMG

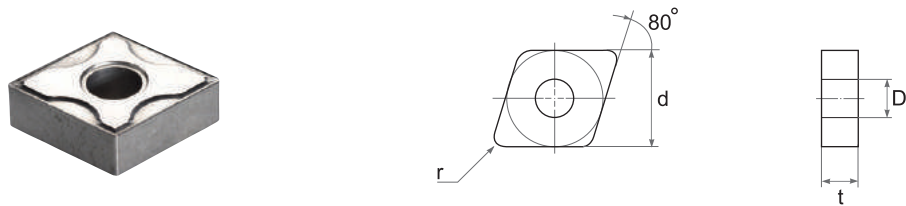

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
CNMG 120404SF	CNMG 431SF	12.70	4.76	0.4	5.16	●	●				
CNMG 120408SF	CNMG 432SF	12.70	4.76	0.8	5.16	●	●			●	
CNMG 120412SF	CNMG 433SF	12.70	4.76	1.2	5.16						

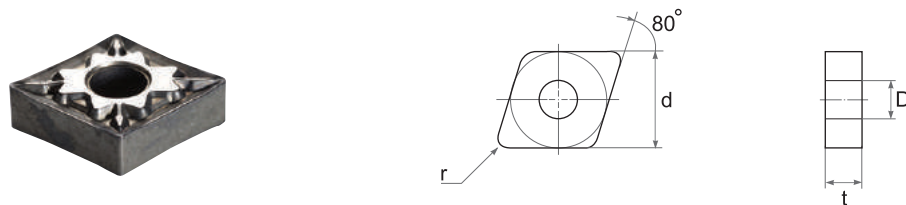


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
CNMG 120404SY	CNMG 431SY	12.70	4.76	0.4	5.16	●	●	●		●	
CNMG 120408SY	CNMG 432SY	12.70	4.76	0.8	5.16	●	●	●		●	
CNMG 120412SY	CNMG 433SY	12.70	4.76	1.2	5.16	●	●			●	

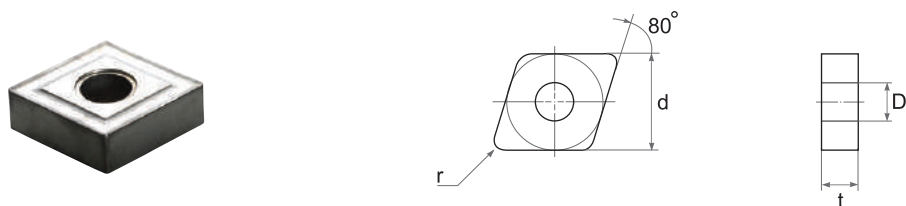


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
CNMG 120404SG	CNMG 431SG	12.70	4.76	0.4	5.16	●	●	●			
CNMG 120408SG	CNMG 432SG	12.70	4.76	0.8	5.16	●	●	●			
CNMG 120412SG	CNMG 433SG	12.70	4.76	1.2	5.16			●	●		

TURNING INSERT


DNMG

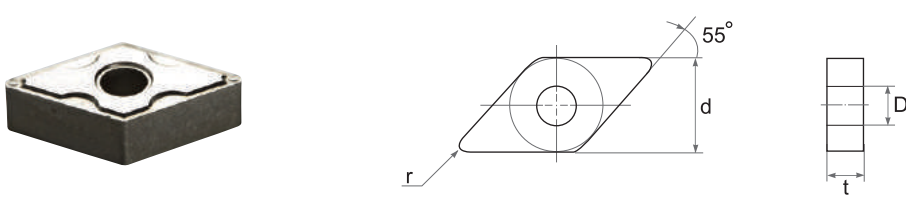

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
DNMG 150404SF	DNMG 431SF	12.70	4.76	0.4	5.16	●	●			●	
DNMG 150408SF	DNMG 432SF	12.70	4.76	0.8	5.16	●	●			●	
DNMG 150412SF	DNMG 433SF	12.70	4.76	1.2	5.16	●	●				●
DNMG 150604SF	DNMG 441SF	12.70	6.35	0.4	5.16	●	●				
DNMG 150608SF	DNMG 442SF	12.70	6.35	0.8	5.16	●	●				
DNMG 150612SF	DNMG 443SF	12.70	6.35	1.2	5.16	●					

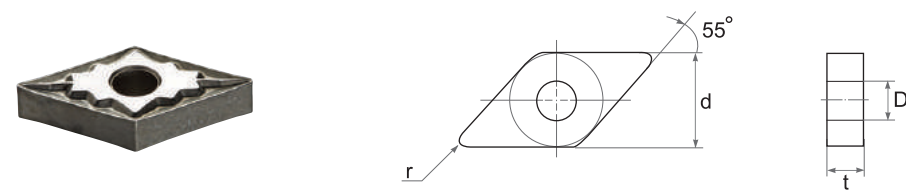


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
DNMG 150404SY	DNMG 431SY	12.70	4.76	0.4	5.16	●	●			●	
DNMG 150408SY	DNMG 432SY	12.70	4.76	0.8	5.16	●	●			●	
DNMG 150412SY	DNMG 433SY	12.70	4.76	1.2	5.16	●	●				●
DNMG 150604SY	DNMG 441SY	12.70	6.35	0.4	5.16	●	●				
DNMG 150608SY	DNMG 442SY	12.70	6.35	0.8	5.16	●	●				
DNMG 150612SY	DNMG 443SY	12.70	6.35	1.2	5.16	●	●				

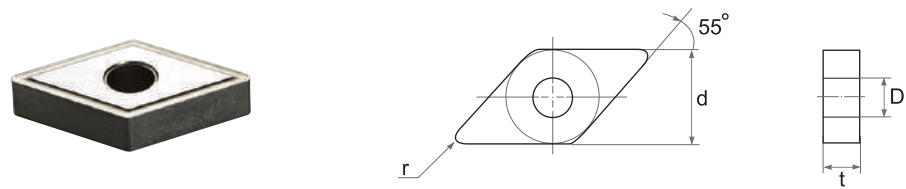


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
DNMG 150404SG	DNMG 431SG	12.70	4.76	0.4	5.16	●	●				
DNMG 150408SG	DNMG 432SG	12.70	4.76	0.8	5.16	●	●				
DNMG 150412SG	DNMG 433SG	12.70	4.76	1.2	5.16	●	●				●
DNMG 150604SG	DNMG 441SG	12.70	6.35	0.4	5.16	●	●				
DNMG 150608SG	DNMG 442SG	12.70	6.35	0.8	5.16	●	●				
DNMG 150612SG	DNMG 443SG	12.70	6.35	1.2	5.16	●					

TURNING INSERT



SNMG

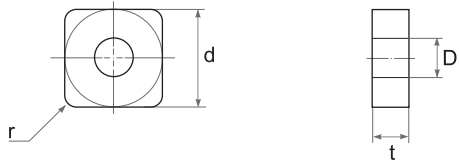

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
SNMG 120404SF	SNMG 431SF	12.70	4.76	0.4	5.16	●	●		●		
SNMG 120408SF	SNMG 432SF	12.70	4.76	0.8	5.16	●	●		●		
SNMG 120412SF	SNMG 433SF	12.70	4.76	1.2	5.16	●	●				

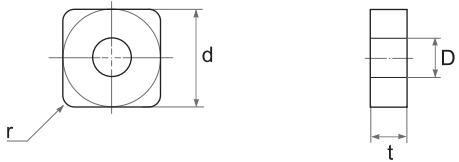


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
SNMG 120404SY	SNMG 431SY	12.70	4.76	0.4	5.16	●	●	●		●	
SNMG 120408SY	SNMG 432SY	12.70	4.76	0.8	5.16	●	●			●	
SNMG 120412SY	SNMG 433SY	12.70	4.76	1.2	5.16	●	●				

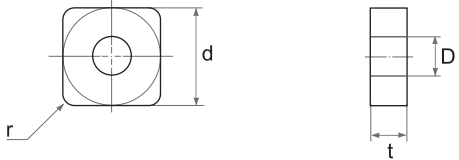


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
SNMG 120404SG	SNMG 431SG	12.70	4.76	0.4	5.16	●	●				
SNMG 120408SG	SNMG 432SG	12.70	4.76	0.8	5.16	●	●				
SNMG 120412SG	SNMG 433SG	12.70	4.76	1.2	5.16	●	●				

TURNING INSERT

TNMG

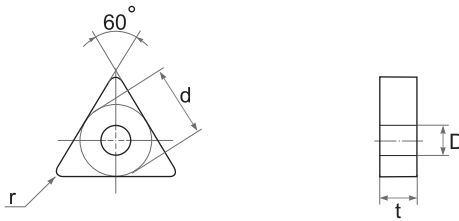


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
TNMG 160404SY	TNMG 331SY	9.52	4.76	0.4	3.81	●	●				
TNMG 160408SY	TNMG 332SY	9.52	4.76	0.8	3.81						
TNMG 160412SY	TNMG 333SY	9.52	4.76	1.2	3.81	●	●				

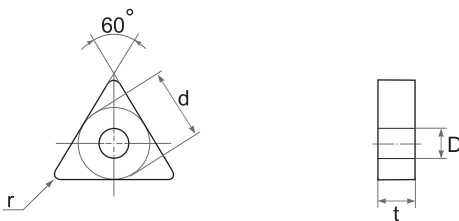

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
TNMG 160404SG	TNMG 331SG	9.52	4.76	0.4	3.81	●	●				
TNMG 160408SG	TNMG 332SG	9.52	4.76	0.8	3.81	●	●				
TNMG 160412SG	TNMG 333SG	9.52	4.76	1.2	3.81	●	●				


VNMG

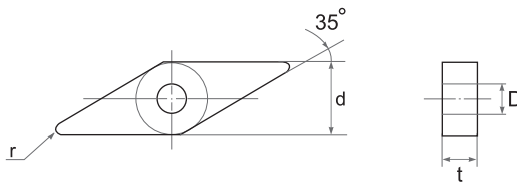


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
VNMG 160404SG	VNMG 331SG	9.52	4.76	0.4	3.81	●	●				
VNMG 160408SG	VNMG 332SG	9.52	4.76	0.8	3.81	●	●				

TURNING INSERT

WNMG

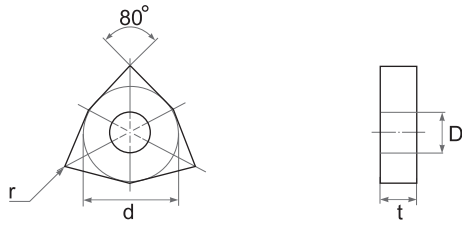


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
WNMG 080404SY	WNMG 431SY	12.70	4.76	0.4	5.16	●	●		●	●	
WNMG 080408SY	WNMG 432SY	12.70	4.76	0.8	5.16	●	●		●	●	

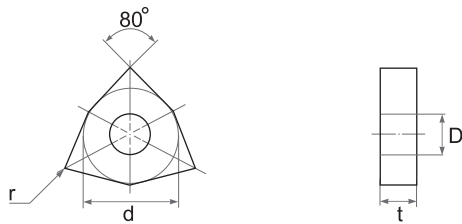

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
WNMG 080404SG	WNMG 431SG	12.70	4.76	0.4	5.16	●	●		●		
WNMG 080408SG	WNMG 432SG	12.70	4.76	0.8	5.16	●	●				
WNMG 080412SG	WNMG 433SG	12.70	4.76	1.2	5.16	●	●				



TURNING INSERT

CCMT

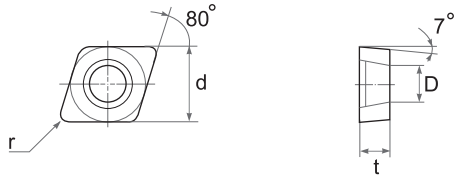



Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO		d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
CCMT 09T304		9.52	3.97	0.4	4.40	●	●		●		
CCMT 09T308		9.52	3.97	0.8	4.40	●	●				

DCGW

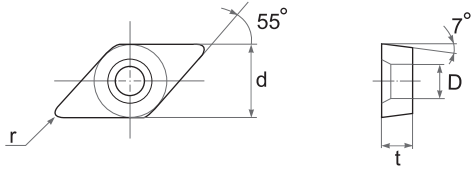

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO		d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
DCGW 090304		8.50	3.18	0.4	3.60		●				
DCGW 11T304		9.52	3.97	0.4	4.40		●				



CPGT

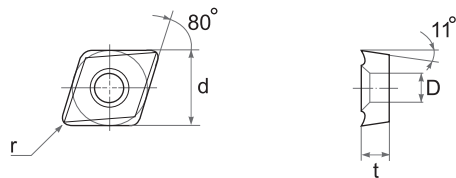

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
CPGT 090304	CPGT 321	9.52	3.18	0.4	4.50	●	●	●			
CPGT 090308	CPGT 322	9.52	3.18	0.8	4.50	●	●	●			



TURNING INSERT

SPGT





Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
SPGT 090304R/L	SPGT 321R/L	9.52	3.18	0.4	3.40	●					
SPGT 090308R/L	SPGT 322R/L	9.52	3.18	0.8	3.40	●					

TPGT



Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
TPGT 110302R/L	TPGT 2205R/L	6.35	3.18	0.2	3.56	●	●				
TPGT 110304R/L	TPGT 221R/L	6.35	3.18	0.4	3.56	●	●				
TPGT 110308R/L	TPGT 222R/L	6.35	3.18	0.8	3.56	●					
TPGT 160304R/L	TPGT 321R/L	9.52	3.18	0.4	4.46	●	●				
TPGT 160308R/L	TPGT 322R/L	9.52	3.18	0.8	4.46	●	●				
TPGT 160404R/L	TPGT 331R/L	9.52	4.76	0.4	4.40	●	●				
TPGT 160408R/L	TPGT 332R/L	9.52	4.76	0.8	4.40	●	●				



TPGT .. KC



Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO		d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
TPGT 110304KC		6.35	3.18	0.4	3.56		●				




TURNING INSERT

TPGR



Type		Dimensions (mm)			Cermet (TiCN)			Cermet (PVD)		
ISO		d	t	r	TX515	TX520	TX530	TX915	TX920	TX930
TPGR 110302R/L		6.35	3.18	0.2	●					
TPGR 110304R/L		6.35	3.18	0.4	●					
TPGR 110308R/L		6.35	3.18	0.8						
TPGR 160302R/L		9.52	3.18	0.2	●					
TPGR 160304R/L		9.52	3.18	0.4	●		●			
TPGR 160308R/L		9.52	3.18	0.8	●					
TPGR 220404K-R/L		12.70	4.76	0.4	●		●			
TPGR 220408K-R/L		12.70	4.76	0.8	●					
TPGR 220412K-R/L		12.70	4.76	1.2	●					


SPMW



Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO		d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
SPMW 090304HS		9.52	3.18	0.4	3.4	●	●				
SPMW 090308HS		9.52	3.18	0.8	3.4	●	●				
SPMW 090304HL		9.52	3.18	0.4	4.6	●	●				
SPMW 090308HL		9.52	3.18	0.8	4.6	●	●				


TURNING INSERT

DNGG

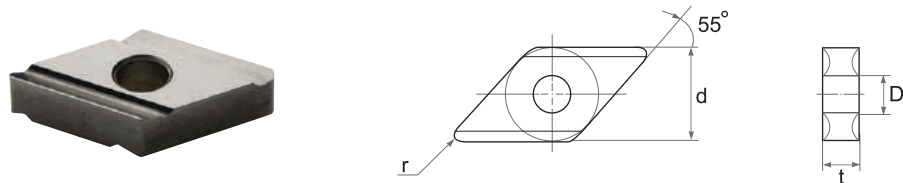


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
DNGG 150404R/L	DNGG 431R/L	12.70	4.76	0.4	5.16	●	●			●	
DNGG 150408R/L	DNGG 432R/L	12.70	4.76	0.8	5.16	●	●				
DNGG 150604R/L	DNGG 441R/L	12.70	6.35	0.4	5.16	●	●				
DNGG 150608R/L	DNGG 442R/L	12.70	6.35	0.8	5.16	●	●				

SNGG

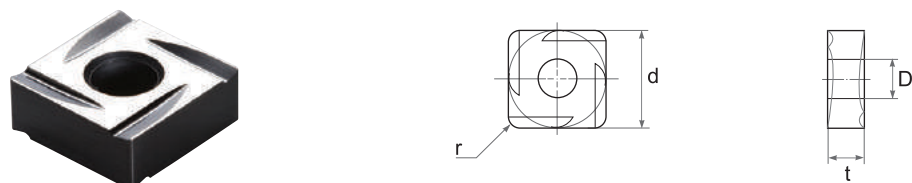

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
SNGG 120404R/L	SNGG 431R/L	12.70	4.76	0.4	5.16	●	●				
SNGG 120408R/L	SNGG 432R/L	12.70	4.76	0.8	5.16	●	●				
SNGG 120412R/L	SNGG 433R/L	12.70	4.76	1.2	5.16						


SNGL

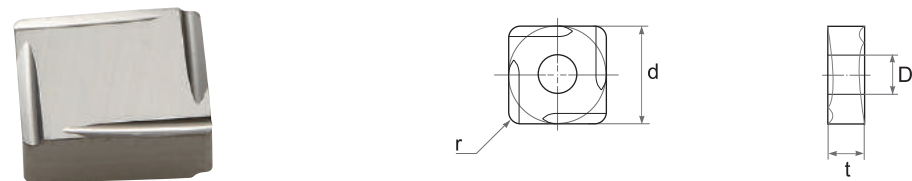

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO		d	t	r		TX515	TX520	TX530	TX915	TX920	TX930
SNGL 070204R/L		7.14	2.38	0.4							


TURNING INSERT

TNGG

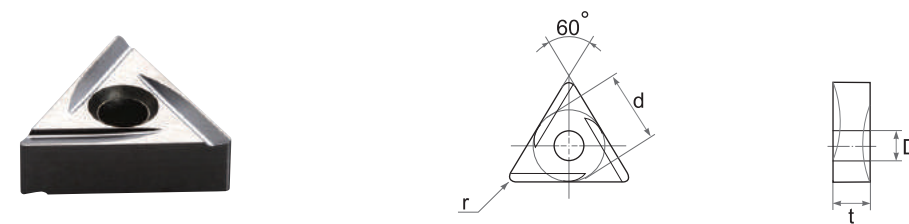


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
TNGG 160402R/L	TNGG 3302R/L	9.52	4.76	0.2	3.81	●	●	●			
TNGG 160404R/L	TNGG 331R/L	9.52	4.76	0.4	3.81	●	●	●			
TNGG 160408R/L	TNGG 332R/L	9.52	4.76	0.8	3.81	●	●				
TNGG 220404R/L	TNGG 431R/L	12.70	4.76	0.4	5.16	●	●				
TNGG 220408R/L	TNGG 432R/L	12.70	4.76	0.8	5.16	●	●				

TNGG .. FS

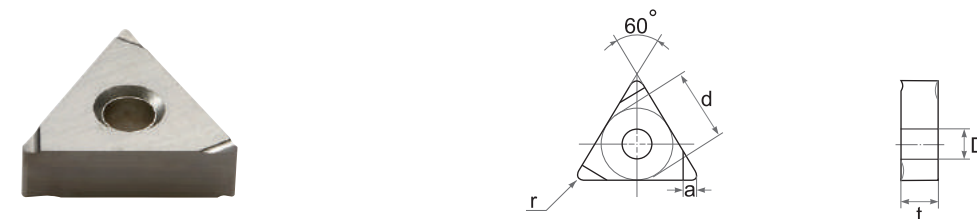

Type		Dimensions (mm)					Cermet (TiCN)			Cermet (PVD)		
ISO		d	t	r	D	a	TX515	TX520	TX530	TX915	TX920	TX930
TNGG 160402R/L-FS		9.52	4.76	0.2	3.81	1.28	●	●			●	
TNGG 160404R/L-FS		9.52	4.76	0.4	3.81	1.28	●	●				
TNGG 160408R/L-FS		9.52	4.76	0.8	3.81	1.28	●	●				


TNGG .. F

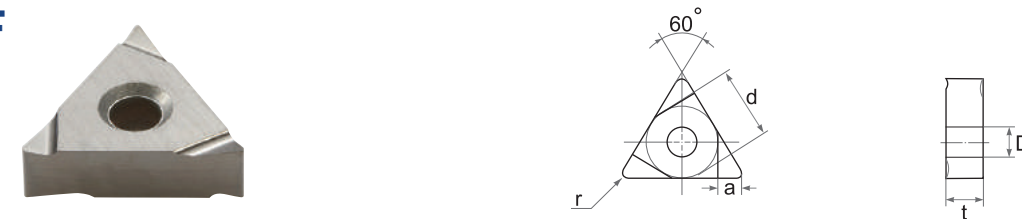

Type		Dimensions (mm)					Cermet (TiCN)			Cermet (PVD)		
ISO		d	t	r	D	a	TX515	TX520	TX530	TX915	TX920	TX930
TNGG 160402R/L-F		9.52	4.76	0.2	3.81	2.50	●	●				
TNGG 160404R/L-F		9.52	4.76	0.4	3.81	2.50	●	●			●	
TNGG 160408R/L-F		9.52	4.76	0.8	3.81	2.50	●	●				

TURNING INSERT


TNMG .. 2G

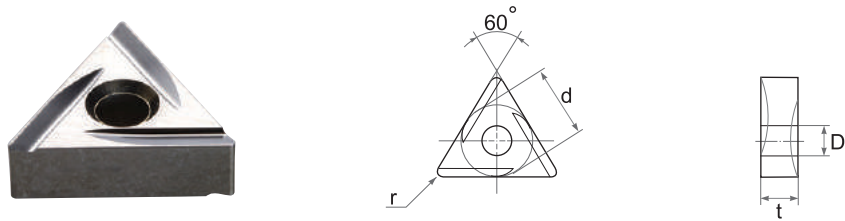

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r	D	TX515	TX520	TX530	TX915	TX920	TX930
TNMG 160404R/L 2G	TNMG 331R/L 2G	9.52	4.76	0.4	3.81	●	●	●		●	
TNMG 160408R/L 2G	TNMG 332R/L 2G	9.52	4.76	0.8	3.81	●	●			●	


MILLING INSERT

SDCN

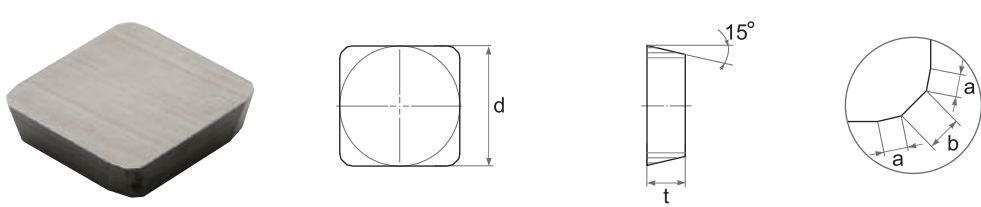


Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	a	b	TX515	TX520	TX530	TX915	TX920	TX930
SDCN 1203MT	SDCN 42MT	12.70	3.18	0.50	1.40		●	●			
SDCN 1504MT	SDCN 53MT	15.87	4.76	0.50	1.40			●			

SDKN

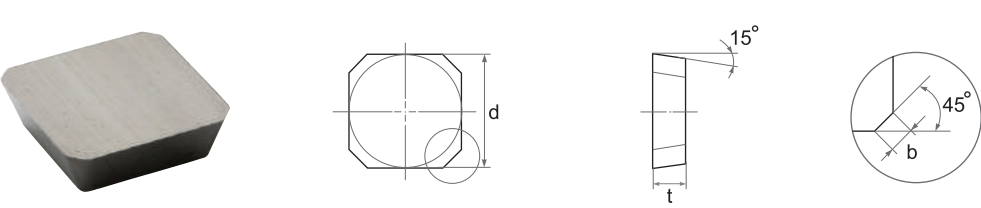

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	r		TX515	TX520	TX530	TX915	TX920	TX930
SDKN 1203AETN	SDKN 42AETN	12.70	3.18	2.00			●	●			
SDKN 1504AETN	SDKN 53AETN	15.87	4.76	2.00			●	●			



SDEN

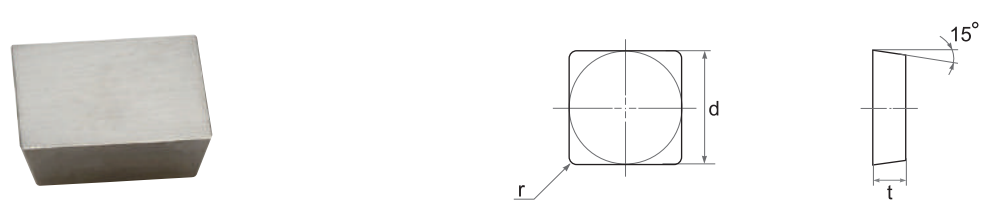

Type		Dimensions (mm)			Cermet (TiCN)			Cermet (PVD)		
ISO		d	t	r	TX515	TX520	TX530	TX915	TX920	TX930
SDEN 150404FN		15.87	4.76	0.4		●	●			




MILLING INSERT

SDEW





Type		Dimensions (mm)			Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	D	TX515	TX520	TX530	TX915	TX920	TX930
SDEW 1204AZT	SDEW 43AZT	12.70	4.76	5.20		●	●			

SNK



Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	D	a	TX515	TX520	TX530	TX915	TX920	TX930
SNK 0903AEN	SNK 32AEN	9.52	3.18	3.81	1.40	●					



SEHW



Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	D	r	TX515	TX520	TX530	TX915	TX920	TX930
SEHW 120408AE	SEHW 432AE	12.70	4.76	5.50	0.8			●			●





MILLING INSERT

SEKN






Type		Dimensions (mm)			Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	b	TX515	TX520	TX530	TX915	TX920	TX930
SEKN 1203 AFTN	SEKN 42 AFTN	12.70	3.18	2.00	●	●	●			●
SEKN 1504 AFTN	SEKN 53 AFTN	15.87	4.76	2.00		●	●			●

SEKN .. R



Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	b	R	TX515	TX520	TX530	TX915	TX920	TX930
SEKN 120308 AFTN	SEKN 432 AFTN	12.70	3.18	2.00	0.8		●	●			
SEKN 150408 AFTN	SEKN 532 AFTN	15.87	4.76	2.00	0.8						


SPKN



Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	a	b	TX515	TX520	TX530	TX915	TX920	TX930
SPKN 1203EDTR/L	SPKN 42EDTR/L	12.70	3.18	1.00	1.40		●	●			
SPKN 1504EDTR/L	SPKN 53EDTR/L	15.87	4.76	1.00	1.40		●	●			


MILLING INSERT

TEKN

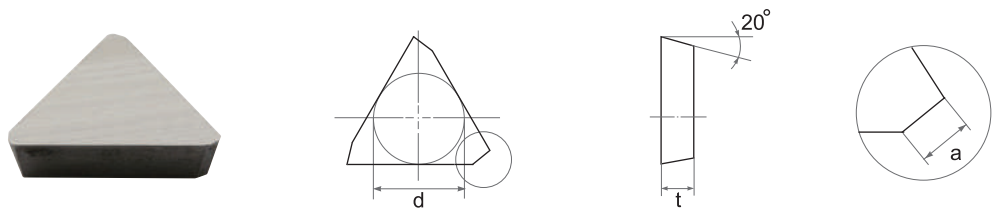

Type		Dimensions (mm)			Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	a	TX515	TX520	TX530	TX915	TX920	TX930
TEKN 1603PETR/L	TEKN 32PETR/L	9.52	3.18	1.40		●	●			
TEKN 2204PETR/L	TEKN 43PETR/L	12.70	4.76	2.00		●	●			
TEKN 1603PEER/L	TEKN 32PEER/L	9.52	3.18	1.40		●	●			
TEKN 2204PEER/L	TEKN 43PEER/L	12.70	4.76	2.00		●	●			


TPKN

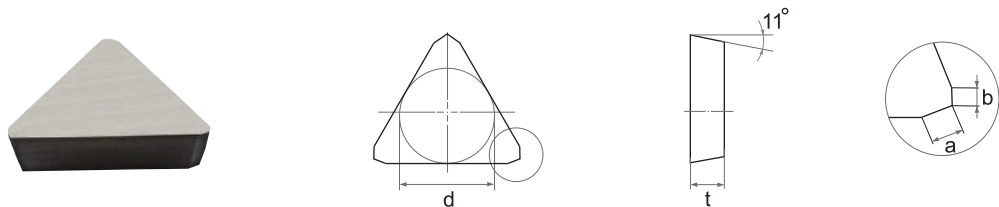

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	ASA	d	t	a	b	TX515	TX520	TX530	TX915	TX920	TX930
TPKN 1603PDTR/L	TPKN 32PDTR/L	9.52	3.18	1.20	1.00		●	●			
TPKN 2204PDTR/L	TPKN 43PDTR/L	12.70	4.76	1.40	0.70		●	●			


MILLING INSERT

YCE

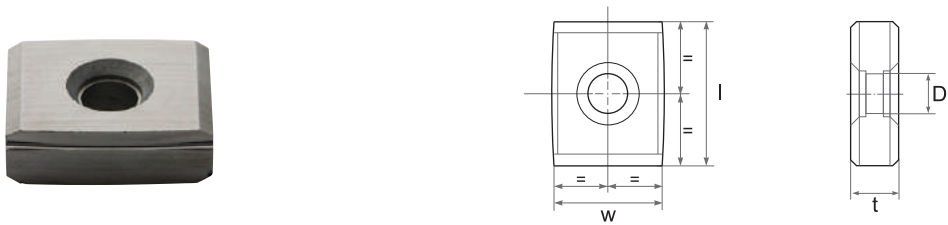

Type		Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO		l	w	t	D	TX515	TX520	TX530	TX915	TX920	TX930
YCE 434-01		19.05	14.29	6.35	5.25	●	●				



XCET

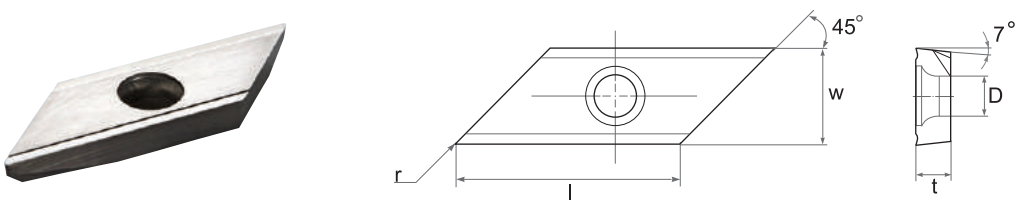

Type		Dimensions (mm)					Cermet (TiCN)			Cermet (PVD)		
ISO		l	w	t	D	r	TX515	TX520	TX530	TX915	TX920	TX930
XCET 310404 ER		22.00	12.70	4.50	5.60	0.4		●			●	
XCET 310408 ER		22.00	12.70	4.50	5.60	0.8		●				



SPECIAL INSERT

BSN

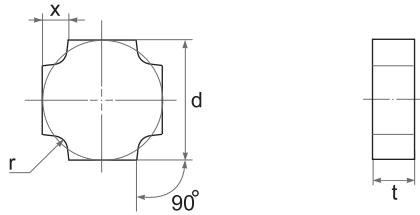

Type	Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	d	x	t	r	TX515	TX520	TX530	TX915	TX920	TX930
BSN 090306	9.52	2.00	3.18	0.6		●				
BSN 090310	9.52	2.57	3.18	1.0		●				
BSN 120406	12.70	2.14	4.76	0.6		●				
BSN 120410	12.70	2.40	4.76	1.0		●				
BSN 120415	12.70	3.00	4.76	1.5		●				
BSN 120420	12.70	3.45	4.76	2.0		●				
BSN 150525	15.87	4.00	5.56	2.5		●				
BSN 150530	15.87	4.70	5.56	3.0		●				


BTN

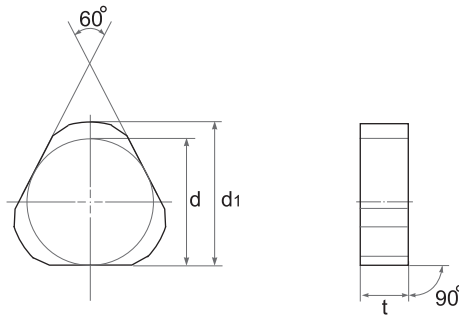

Type	Dimensions (mm)			Cermet (TiCN)			Cermet (PVD)		
ISO	d	d _i	t	TX515	TX520	TX530	TX915	TX920	TX930
BTN 1464	12.70	14.60	4.76		●				
BTN 1714	15.87	17.10	4.76	●	●				
BTN 2116	19.05	21.10	6.00		●				
BTN 2416	22.22	24.10	6.00		●				
BTN 2718	25.40	27.10	8.80		●				


SPECIAL INSERT

GBF

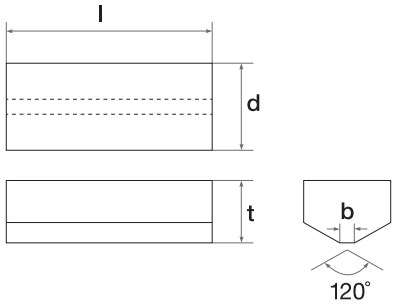

Type	Dimensions (mm)				Cermet (TiCN)			Cermet (PVD)		
ISO	d	l	t	b	TX515	TX520	TX530	TX915	TX920	TX930
GBF 127250 B	12.70	25.00	8.00	2.3		●				
GBF 150250 B	15.00	25.00	9.50	2.3		●				
GBF 200300 B	20.00	30.00	9.50	2.5		●				


INGN

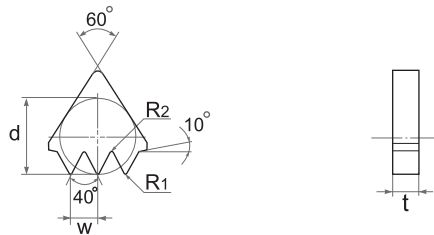

Type	Dimensions (mm)						Cermet (TiCN)			Cermet (PVD)		
	ISO	d	t	w	R ₁	R ₂	TX515	TX520	TX530	TX915	TX920	TX930
INGN 160435 F303		9.52	4.76	3.56	0.5	0.3		●				
INGN 160435 F304		9.52	4.76	3.56	0.5	0.4		●			●	
INGN 220435 F403		12.70	4.76	3.56	0.5	0.3						
INGN 220435 F404		12.70	4.76	3.56	0.5	0.4						

BLANK


RBAR



Type	Dimensions (mm)		Cermet (TiCN)			Cermet (PVD)		
ISO	d	l	TX515	TX520	TX530	TX915	TX920	TX930
RBAR 2230 B	30.8	22.8			●			
RBAR 2507 B	7.8	25.8			●			
RBAR 2508 B	8.8	25.8			●			
RBAR 2509 B	9.8	25.8			●			
RBAR 2510 B	10.8	25.8			●			
RBAR 2511 B	11.8	25.8			●			
RBAR 2512 B	12.8	25.8			●			
RBAR 2513 B	13.8	25.8			●			
RBAR 2514 B	14.8	25.8			●			
RBAR 2515 B	15.8	25.8			●			
RBAR 2516 B	16.8	25.8			●			
RBAR 2517 B	17.8	25.8			●			
RBAR 2518 B	18.8	25.8			●			
RBAR 2519 B	19.8	25.8			●			
RBAR 2520 B	20.8	25.8			●			
RBAR 2521 B	21.8	25.8			●			
RBAR 2525 B	25.8	25.8			●			
RBAR 2530 B	30.8	25.8			●			
RBAR 2535 B	35.8	25.8			●			
RBAR 2640 B	40.8	26.8			●			
RBAR 2950 B	50.8	29.8			●			
RBAR 3007 B	7.8	30.8			●			
RBAR 3008 B	8.8	30.8			●			
RBAR 3009 B	9.8	30.8			●			
RBAR 3010 B	10.8	30.8			●			
RBAR 3011 B	11.8	30.8			●			
RBAR 3012 B	12.8	30.8			●			
RBAR 3013 B	13.8	30.8			●			
RBAR 3014 B	14.8	30.8			●			
RBAR 3016 B	16.8	30.8			●			
RBAR 3017 B	17.8	30.8			●			
RBAR 3018 B	18.8	30.8			●			
RBAR 3019 B	19.8	30.8			●			
RBAR 3025 B	25.8	30.8			●			
RBAR 3040 B	40.8	30.8			●			
RBAR 3045 B	45.8	30.8			●			
RBAR 3050 B	50.8	30.8			●			
RBAR 3507 B	7.8	35.8			●			

BLANK


RBAR



Type	Dimensions (mm)		Cermet (TiCN)			Cermet (PVD)		
ISO	d	l	TX515	TX520	TX530	TX915	TX920	TX930
RBAR 3508 B	8.8	35.8			●			
RBAR 3509 B	9.8	35.8			●			
RBAR 3510 B	10.8	35.8			●			
RBAR 3511 B	11.8	35.8			●			
RBAR 3512 B	12.8	35.8			●			
RBAR 3513 B	13.8	35.8			●			
RBAR 3514 B	14.8	35.8			●			
RBAR 3515 B	15.8	35.8			●			
RBAR 3516 B	16.8	35.8			●			
RBAR 3517 B	17.8	35.8			●			
RBAR 3518 B	18.8	35.8			●			
RBAR 3519 B	19.8	35.8			●			
RBAR 3520 B	20.8	35.8			●			
RBAR 3521 B	21.8	35.8			●			
RBAR 3523 B	23.8	35.8			●			
RBAR 3525 B	25.8	35.8			●			
RBAR 3526 B	26.8	35.8			●			
RBAR 3530 B	30.8	35.8			●			
RBAR 3535 B	35.8	35.8			●			
RBAR 3540 B	40.8	35.8			●			
RBAR 3550 B	50.8	35.8			●			
RBAR 3555 B	55.8	35.8			●			
RBAR 3560 B	60.8	35.8			●			
RBAR 3565 B	65.8	35.8			●			
RBAR 3570 B	70.8	35.8			●			
RBAR 4030 B	30.8	40.8			●			
RBAR 4042 B	42.8	40.8			●			
RBAR 4045 B	45.8	40.8			●			
RBAR 4050 B	50.8	40.8			●			
RBAR 4060 B	60.8	40.8			●			
RBAR 4070 B	70.8	40.8			●			
RBAR 4080 B	80.8	40.8			●			
RBAR 4090 B	90.8	40.8			●			
RBAR 5055 B	55.8	50.8			●			
RBAR 5060 B	60.8	50.8			●			

BLANK



SBAR

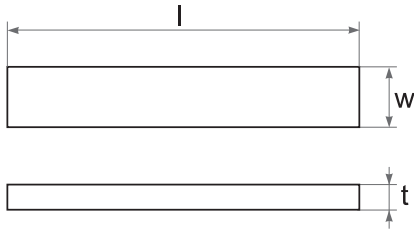

Type	Dimensions (mm)			Cermet (TiCN)			Cermet (PVD)		
ISO	l	w	t	TX515	TX520	TX530	TX915	TX920	TX930
SBAR 040825	26.11	8.89	5.30		●				
SBAR 041608	16.67	4.75	8.10		●				
SBAR 050518	18.01	5.15	5.00		●				
SBAR 050620	22.35	4.95	6.30		●				
SBAR 056440	47.31	6.78	5.50		●				
SBAR 060331	34.75	5.94	6.35		●				
SBAR 121985	19.10	12.67	8.50		●				
SBAR 122025	25.50	1.40	2.20		●				
SBAR 122525	25.50	1.40	2.70		●				
SBAR 1295632	12.90	5.60	3.20		●				
SBAR 151985	19.10	15.30	8.50		●				
SBAR 163025	29.82	3.47	1.60		●				
SBAR 163315	15.62	3.41	1.60		●				
SBAR 163815	16.67	4.75	1.60		●				
SBAR 173815	15.06	3.69	1.70		●				
SBAR 203530	29.59	3.44	2.00		●				
SBAR 204035	34.53	3.94	2.00		●				
SBAR 704035	34.78	3.97	7.00		●				
SBAR 224816	16.67	4.72	2.20		●				
SBAR 255022	22.18	4.92	2.50		●				
SBAR 256035	34.49	5.89	2.50		●				
SBAR 306035	34.75	6.00	3.00		●				
SBAR 324850	3.60	5.10	50.00		●				
SBAR 326650	3.60	7.00	50.00		●				
SBAR 345022	22.35	4.95	3.40		●				
SBAR 327025	24.44	7.09	3.35		●				
SBAR 325075	71.94	14.39	3.20		●				
SBAR 327050	50.00	7.00	3.20		●				
SBAR 368950	50.40	8.92	3.60		●				
SBAR 328550	50.03	8.85	3.20		●				
SBAR 607050	50.40	8.92	6.50		●				
SBAR 638232	32.72	8.99	6.30		●				
SBAR 202525	25.40	2.70	2.20		●				
SBAR 224035	34.53	3.94	2.20		●				
SBAR 368232	32.72	8.99	3.60		●				

MEMO

PCBN / PCD

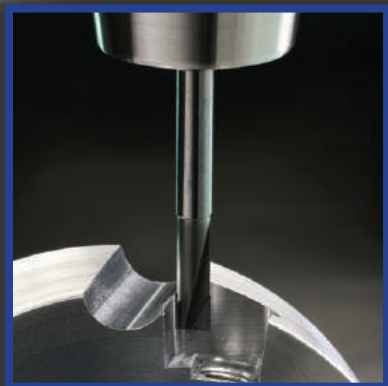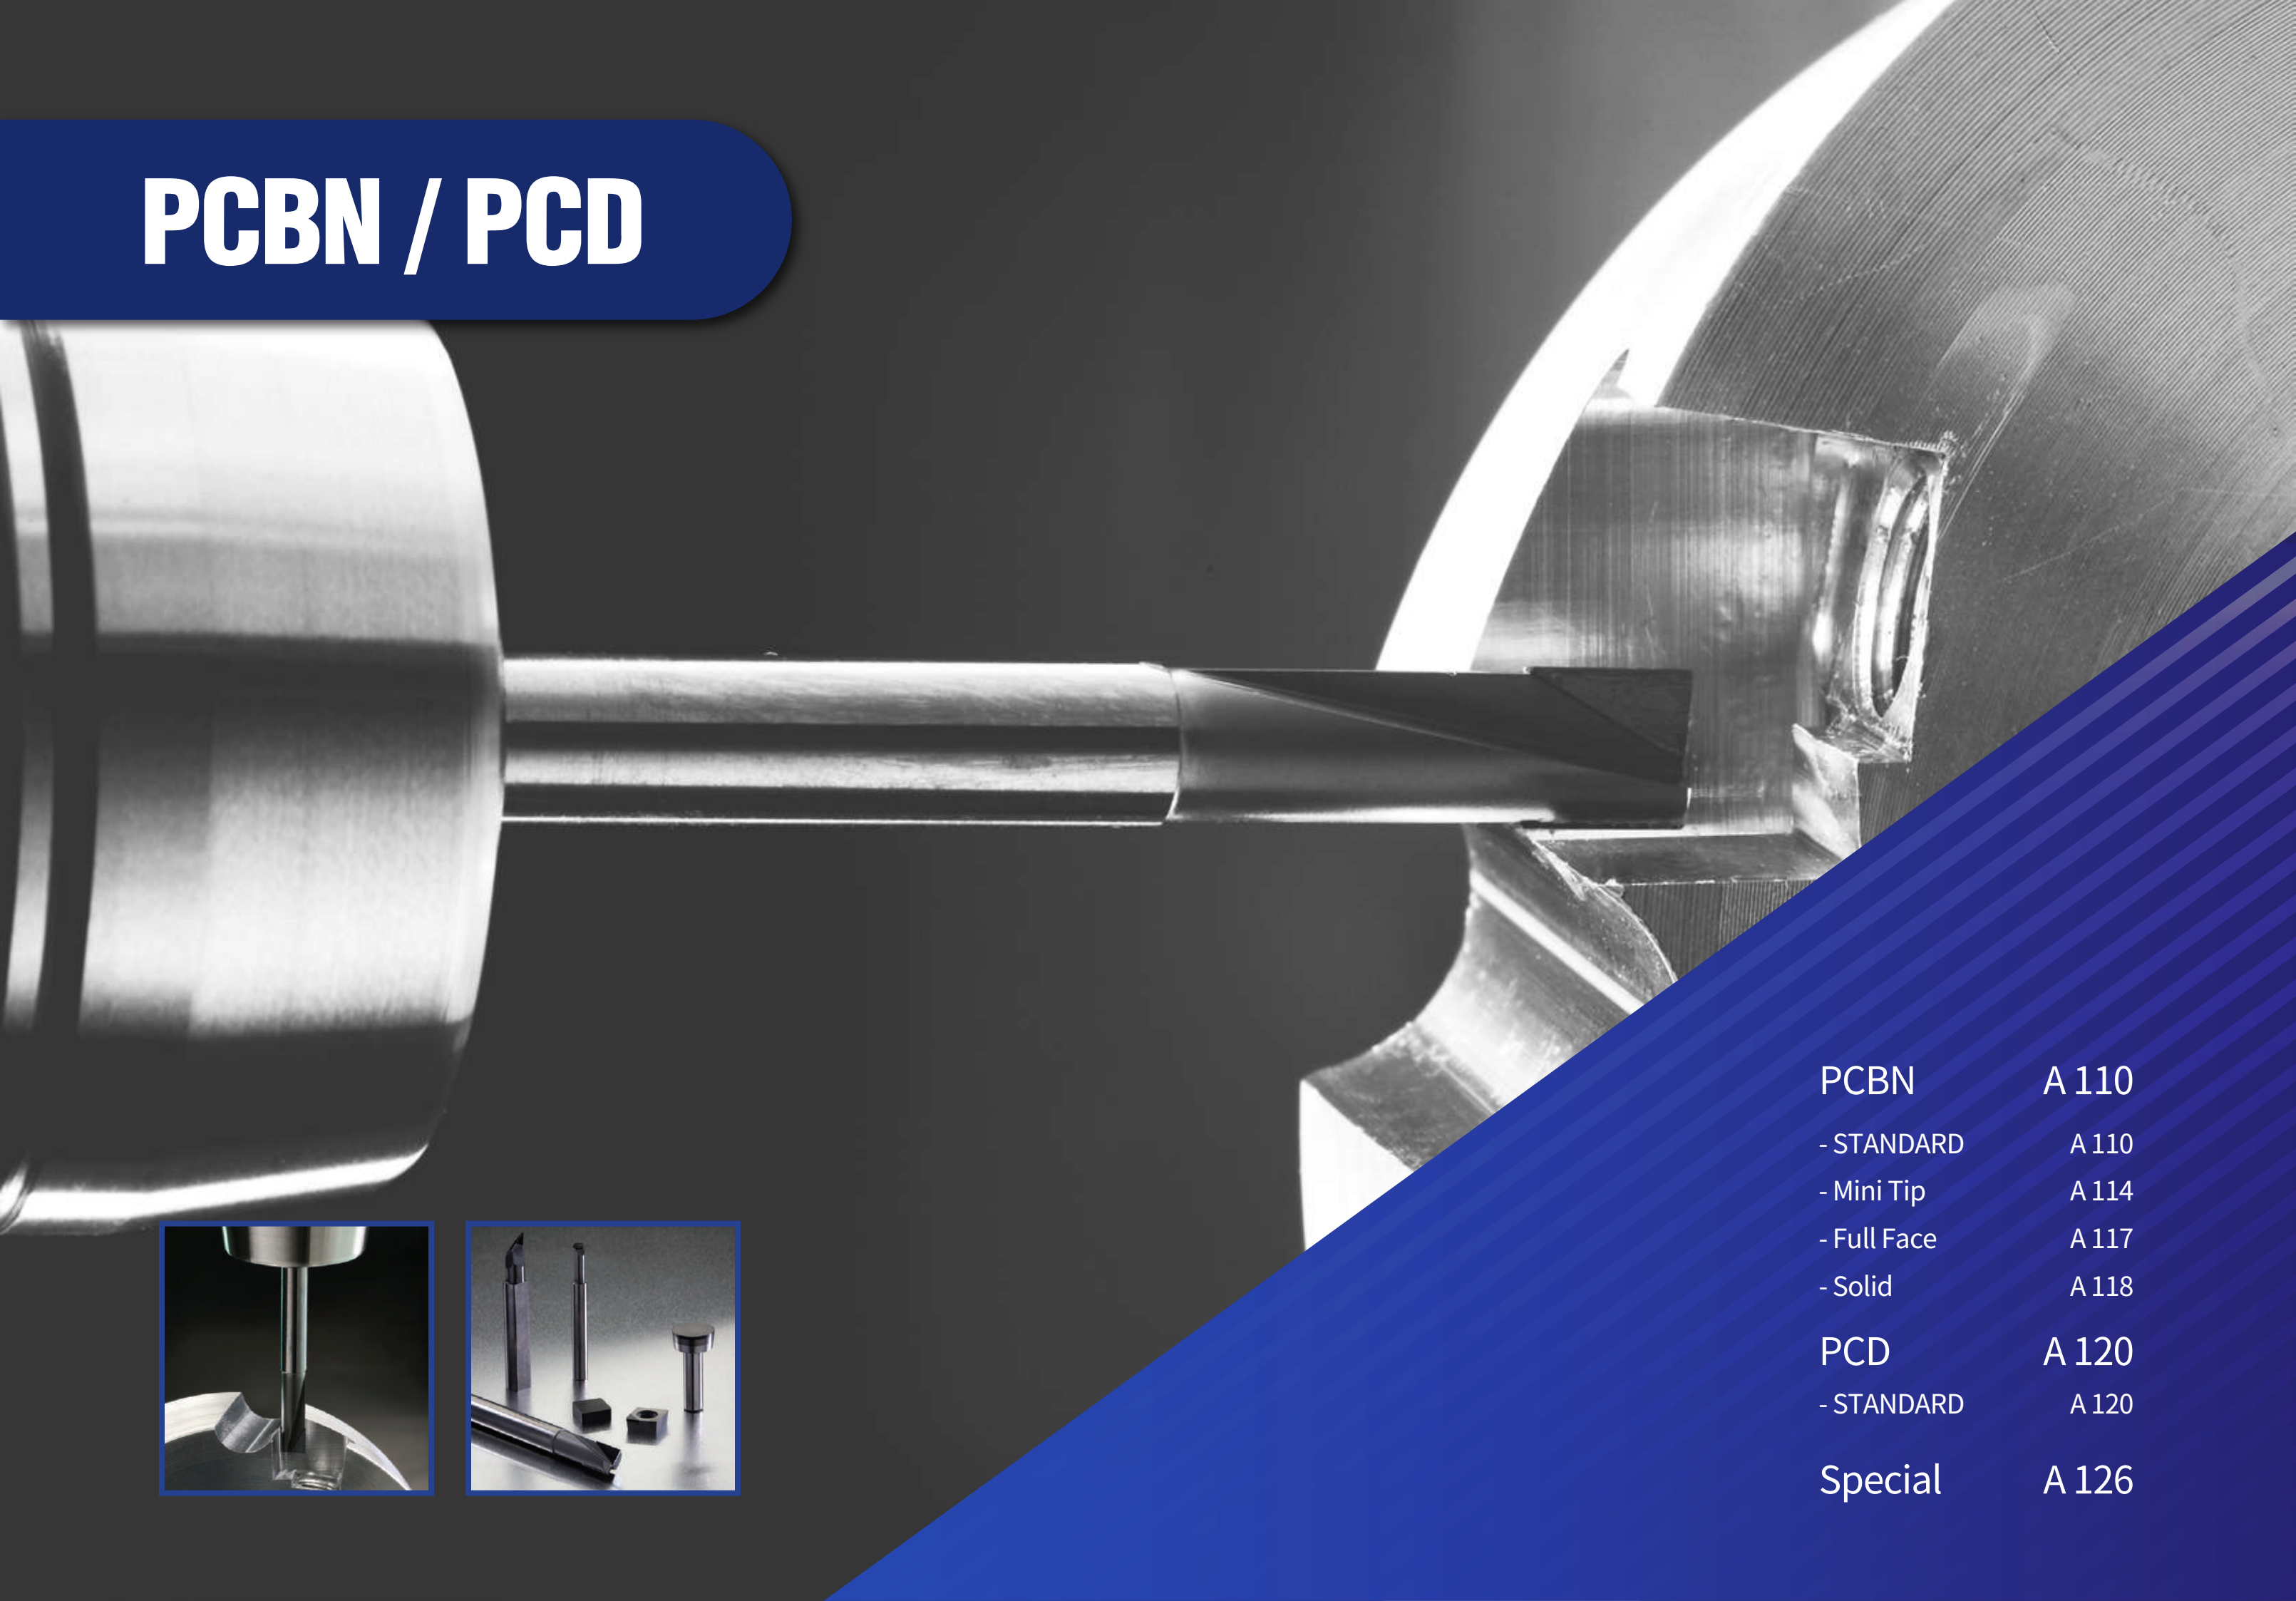

PCBN A 110

- STANDARD A 110
- Mini Tip A 114
- Full Face A 117
- Solid A 118

PCD A 120


- STANDARD A 120

Special A 126

PCBN


STANDARD

CNGA

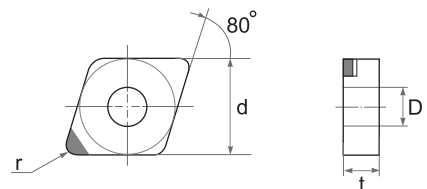


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
CNGA 120402 R1	CNGA 4302 R1	12.70	4.76	0.2	5.16				
CNGA 120404 R1	CNGA 431 R1	12.70	4.76	0.4	5.16	●	●		
CNGA 120408 R1	CNGA 432 R1	12.70	4.76	0.8	5.16	●	●	●	●
CNGA 120412 R1	CNGA 433 R1	12.70	4.76	1.2	5.16	●	●	●	●

CCGW

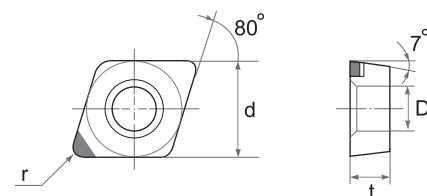


Type		Dimensions (mm)							
ISO		d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
CCGW 060202 R1		6.35	2.38	0.2	2.80		●		
CCGW 060204 R1		6.35	2.38	0.4	2.80	●	●		
CCGW 060208 R1		6.35	2.38	0.8	2.80				
CCGW 09T304 R1		9.52	3.97	0.4	4.40	●	●	●	●
CCGW 09T308 R1		9.52	3.97	0.8	4.40	●	●	●	●

DNGA

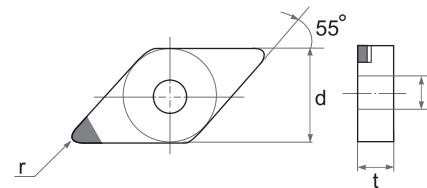


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
DNGA 150404 R1	DNGA 431 R1	12.70	4.76	0.4	5.16	●	●	●	
DNGA 150408 R1	DNGA 432 R1	12.70	4.76	0.8	5.16	●	●	●	●
DNGA 150412 R1	DNGA 433 R1	12.70	4.76	1.2	5.16	●	●	●	●
DNGA 150604 R1	DNGA 441 R1	12.70	6.35	0.4	5.16	●	●	●	
DNGA 150608 R1	DNGA 442 R1	12.70	6.35	0.8	5.16	●	●	●	●
DNGA 150612 R1	DNGA 443 R1	12.70	6.35	1.2	5.16	●	●	●	●

DNGA ... CB

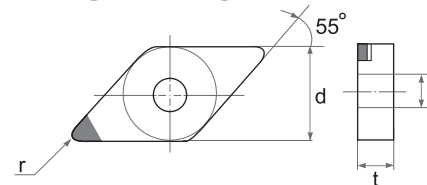

Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
DNGA 150408 M2 CB	DNGA 432 M2 CB	12.70	4.76	0.8	5.16	●	●	●	●

DCGW

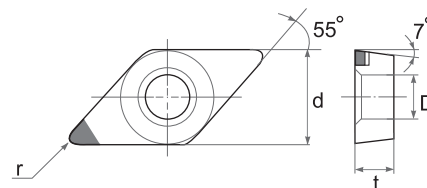


Type		Dimensions (mm)							
ISO		d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
DCGW 070202 R1		6.35	2.38	0.2	2.80		●		
DCGW 070204 R1		6.35	2.38	0.4	2.80	●	●	●	
DCGW 070208 R1		6.35	2.38	0.8	2.80	●	●	●	●
DCGW 11T302 R1		9.52	3.97	0.2	4.40		●		
DCGW 11T304 R1		9.52	3.97	0.4	4.40	●	●	●	
DCGW 11T308 R1		9.52	3.97	0.8	4.40	●	●	●	●

PCBN


STANDARD

SNGA

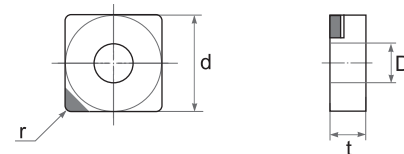


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
SNGA 090304 R1	SNGA 321 R1	9.52	3.18	0.4	3.81				
SNGA 120404 R1	SNGA 431 R1	12.70	4.76	0.4	5.16	●	●		
SNGA 120408 R1	SNGA 432 R1	12.70	4.76	0.8	5.16	●	●	●	●
SNGA 120412 R1	SNGA 433 R1	12.70	4.76	1.2	5.16	●	●	●	●

SNGN

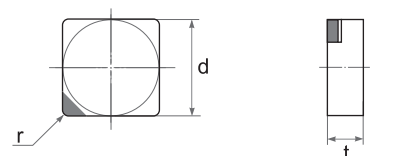


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
SNGN 090304 R1	SNGN 321 R1	9.52	3.18	0.4					
SNGN 090308 R1	SNGN 322 R1	9.52	3.18	0.8					
SNGN 090312 R1	SNGN 323 R1	9.52	3.18	1.2					
SNGN 120404 R1	SNGN 431 R1	12.70	4.76	0.4		●	●		
SNGN 120408 R1	SNGN 432 R1	12.70	4.76	0.8		●	●	●	●
SNGN 120412 R1	SNGN 433 R1	12.70	4.76	1.2		●	●	●	●

SCGW

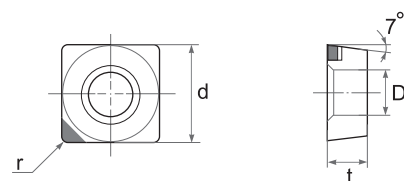

Type		Dimensions (mm)							
ISO		d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
SCGW 09T304 R1		9.52	3.97	0.4	4.40	●	●		
SCGW 09T308 R1		9.52	3.97	0.8	4.40	●	●	●	●

TNGA

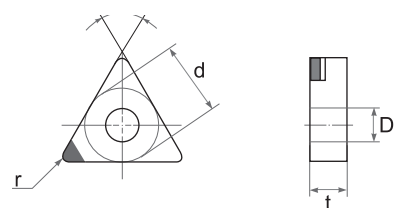


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
TNGA 160402 R1	TNGA 3302 R1	9.52	4.76	0.2	3.81	●	●		
TNGA 160404 R1	TNGA 331 R1	9.52	4.76	0.4	3.81	●	●		
TNGA 160408 R1	TNGA 332 R1	9.52	4.76	0.8	3.81	●	●	●	●
TNGA 160412 R1	TNGA 333 R1	9.52	4.76	1.2	3.81	●	●		

PCBN


STANDARD

TCGW

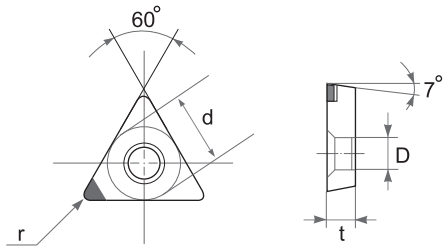


Type		Dimensions (mm)							
ISO		d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
TCGW 090204 R1		5.56	2.38	0.4	2.50	●	●		
TCGW 090208 R1		5.56	2.38	0.8	2.50	●	●	●	●
TCGW 110202 R1		6.35	2.38	0.2	2.80		●		
TCGW 110204 R1		6.35	2.38	0.4	2.80	●	●		
TCGW 110208 R1		6.35	2.38	0.8	2.80	●	●	●	●
TCGW 16T304 R1		9.52	3.97	0.4	4.40	●	●		
TCGW 16T308 R1		9.52	3.97	0.8	4.40	●	●	●	●

TPGN

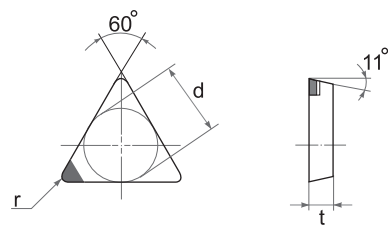


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
TPGN 110304 R1	TPGN 221 R1	6.35	3.18	0.4		●	●		
TPGN 110308 R1	TPGN 222 R1	6.35	3.18	0.8		●	●	●	●
TPGN 110312 R1	TPGN 223 R1	6.35	3.18	1.2					
TPGN 160304 R1	TPGN 321 R1	9.52	3.18	0.4		●	●		
TPGN 160308 R1	TPGN 322 R1	9.52	3.18	0.8		●	●	●	●
TPGN 160312 R1	TPGN 323 R1	9.52	3.18	1.2					

TPGB

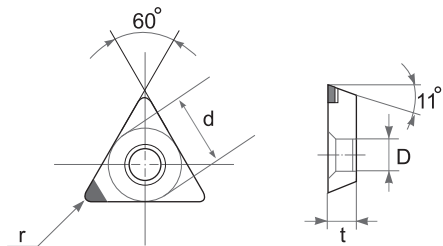

Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
TPGB 080202 R1	TPGB 6302 R1	4.76	2.38	0.2	2.40				
TPGB 090204 R1	TPGB 731 R1	5.56	2.38	0.4	2.50	●	●		
TPGB 110302 R1	TPGB 2202 R1	6.35	3.18	0.2	3.30				
TPGB 110304 R1	TPGB 221 R1	6.35	3.18	0.4	3.30				
TPGB 110308 R1	TPGB 222 R1	6.35	3.18	0.8	3.30				

TPGW

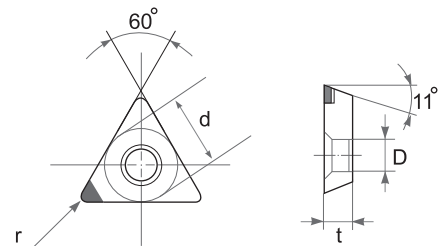


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
TPGW 160304 R1	TPGW 321 R1	9.52	3.18	0.4	4.40				
TPGW 160308 R1	TPGW 322 R1	9.52	3.18	0.8	4.40				

PCBN


STANDARD

VNGA

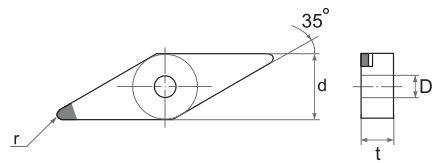


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
VNGA 160404 R1	VNGA 331 R1	9.52	4.76	0.4	3.18	●	●		
VNGA 160408 R1	VNGA 332 R1	9.52	4.76	0.8	3.18	●	●	●	●

VBGW

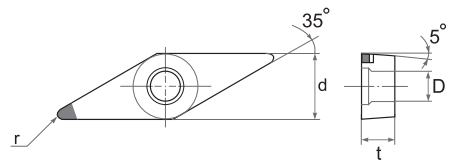

Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
VBGW 110302 R1	VBGW 2202 R1	6.35	3.18	0.2	2.80				
VBGW 110304 R1	VBGW 221 R1	6.35	3.18	0.4	2.80				
VBGW 160404 R1	VBGW 331 R1	9.52	4.76	0.4	4.40	●	●		
VBGW 160408 R1	VBGW 332 R1	9.52	4.76	0.8	4.40	●	●	●	●

VCGW

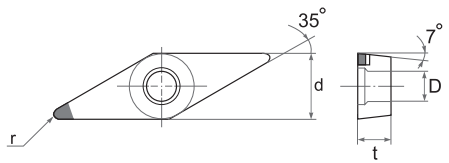


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
VCGW 110302 R1	VCGW 2202 R1	6.35	3.18	0.2	2.80				
VCGW 110304 R1	VCGW 221 R1	6.35	3.18	0.4	2.80				
VCGW 160404 R1	VCGW 331 R1	9.52	4.76	0.4	4.40	●	●		
VCGW 160408 R1	VCGW 332 R1	9.52	4.76	0.8	4.40	●	●	●	●

PCBN


MINI TIP

CNGA

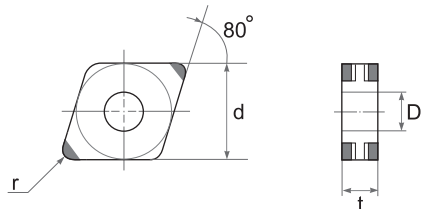


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
CNGA 120404 M1	CNGA 431 M1	12.70	4.76	0.4	5.16				
CNGA 120404 M2	CNGA 431 M2	12.70	4.76	0.4	5.16				
CNGA 120404 M4	CNGA 431 M4	12.70	4.76	0.4	5.16				
CNGA 120408 M1	CNGA 432 M1	12.70	4.76	0.8	5.16				
CNGA 120408 M2	CNGA 432 M2	12.70	4.76	0.8	5.16				
CNGA 120408 M4	CNGA 432 M4	12.70	4.76	0.8	5.16				

CCGW

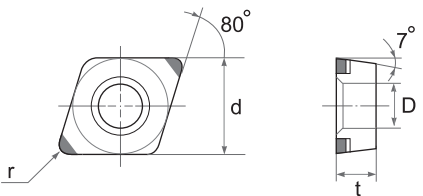


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
CCGW 09T304 M1		9.52	3.97	0.4	4.40				
CCGW 09T304 M2		9.52	3.97	0.4	4.40				
CCGW 09T308 M1		9.52	3.97	0.8	4.40				
CCGW 09T308 M2		9.52	3.97	0.8	4.40				

DCGW

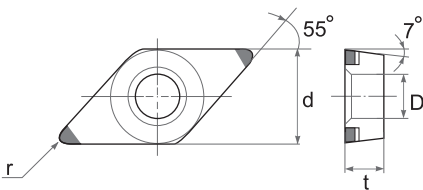

Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
DCGW 11T302 M1		9.52	3.97	0.2	4.40				
DCGW 11T302 M2		9.52	3.97	0.2	4.40				
DCGW 11T304 M1		9.52	3.97	0.4	4.40				
DCGW 11T304 M2		9.52	3.97	0.4	4.40				
DCGW 11T308 M1		9.52	3.97	0.8	4.40				
DCGW 11T308 M2		9.52	3.97	0.8	4.40				

SNGA

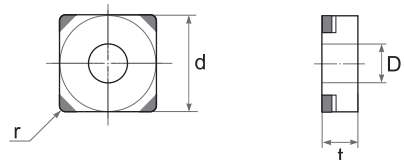


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
SNGA 120404 M1	SNGA 431 M1	12.70	4.76	0.4	5.16				
SNGA 120404 M2	SNGA 431 M2	12.70	4.76	0.4	5.16				
SNGA 120404 M4	SNGA 431 M4	12.70	4.76	0.4	5.16				
SNGA 120408 M1	SNGA 432 M1	12.70	4.76	0.8	5.16				
SNGA 120408 M2	SNGA 432 M2	12.70	4.76	0.8	5.16				
SNGA 120408 M4	SNGA 432 M4	12.70	4.76	0.8	5.16				

PCBN


MINI TIP

SCGW

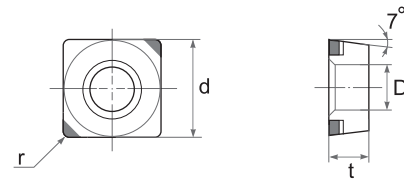


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
SCGW 09T304 M1		9.52	3.97	0.4	4.40				
SCGW 09T304 M2		9.52	3.97	0.4	4.40				
SCGW 09T308 M1		9.52	3.97	0.8	4.40				
SCGW 09T308 M2		9.52	3.97	0.8	4.40				

DNGA

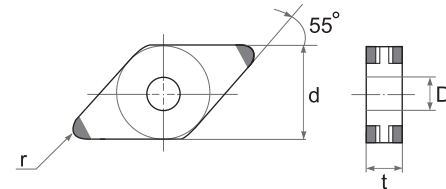


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
DNGA 150404 M1	DNGA 431 M1	12.70	4.76	0.4	5.16				
DNGA 150404 M2	DNGA 431 M2	12.70	4.76	0.4	5.16				
DNGA 150404 M4	DNGA 431 M4	12.70	4.76	0.4	5.16				
DNGA 150408 M1	DNGA 432 M1	12.70	4.76	0.8	5.16				
DNGA 150408 M2	DNGA 432 M2	12.70	4.76	0.8	5.16				
DNGA 150408 M4	DNGA 432 M4	12.70	4.76	0.8	5.16				
DNGA 150604 M1	DNGA 441 M1	12.70	6.35	0.4	5.16				
DNGA 150604 M2	DNGA 441 M2	12.70	6.35	0.4	5.16				
DNGA 150604 M4	DNGA 441 M4	12.70	6.35	0.4	5.16				
DNGA 150608 M1	DNGA 442 M1	12.70	6.35	0.8	5.16				
DNGA 150608 M2	DNGA 442 M2	12.70	6.35	0.8	5.16				
DNGA 150608 M4	DNGA 442 M4	12.70	6.35	0.8	5.16				

TNGA

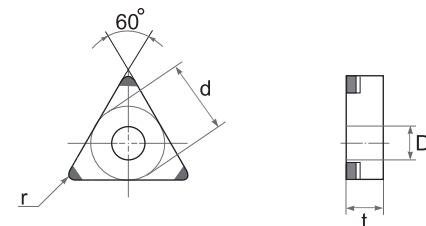

Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
TNGA 160404 M1	TNGA 331 M1	9.52	4.76	0.4	3.81				
TNGA 160404 M3	TNGA 331 M3	9.52	4.76	0.4	3.81				
TNGA 160408 M1	TNGA 332 M1	9.52	4.76	0.8	3.81				
TNGA 160408 M3	TNGA 332 M3	9.52	4.76	0.8	3.81				

TPGW

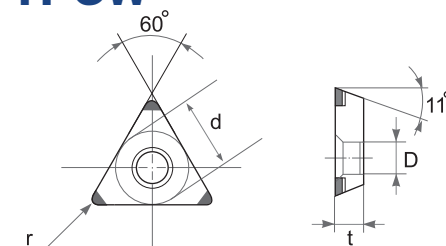


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
TPGW 160304 M1	TPGW 321 M1	9.52	3.18	0.4	4.40				
TPGW 160304 M3	TPGW 321 M3	9.52	3.18	0.4	4.40				
TPGW 160308 M1	TPGW 322 M1	9.52	3.18	0.8	4.40				
TPGW 160308 M3	TPGW 322 M3	9.52	3.18	0.8	4.40				

PCBN


MINI TIP

VNGA

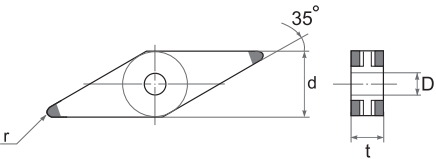

Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
VNGA 160404 M1	VNGA 331 M1	9.52	4.76	0.4	3.18				
VNGA 160404 M2	VNGA 331 M2	9.52	4.76	0.4	3.18				
VNGA 160404 M4	VNGA 331 M4	9.52	4.76	0.4	3.18				
VNGA 160408 M1	VNGA 332 M1	9.52	4.76	0.8	3.18				
VNGA 160408 M2	VNGA 332 M2	9.52	4.76	0.8	3.18				
VNGA 160408 M4	VNGA 332 M4	9.52	4.76	0.8	3.18				

VBGW

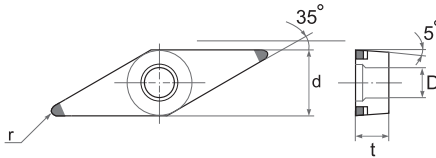


Type		Dimensions (mm)							
ISO	ASA	d	t	r	D	SBN 1000	SBN 2000	SBN 3000	SBN 4000
VBGW 160404 M1	VBGW 331 M1	9.52	4.76	0.4	4.40				
VBGW 160404 M2	VBGW 331 M2	9.52	4.76	0.4	4.40				
VBGW 160408 M1	VBGW 332 M1	9.52	4.76	0.8	4.40				
VBGW 160408 M2	VBGW 332 M2	9.52	4.76	0.8	4.40				

PCBN


FULL FACE

RCGX

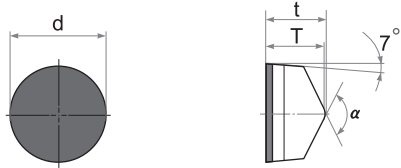


Type		Dimensions (mm)							
ISO	ASA	d	t	T	α	SBN 1000	SBN 2000	SBN 3000	SBN 4000
RCGX 060600 F	RCGX 102 F	6.35	6.35	6.20	120°				
RCGX 090700 F	RCGX 103 F	9.52	7.94	7.70	120°				
RCGX 120700 F	RCGX 104 F	12.70	7.94	7.70	120°				

RCGX

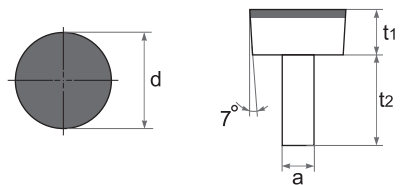


Type		Dimensions (mm)							
ISO		d	t ₁	t ₂	a	SBN 1000	SBN 2000	SBN 3000	SBN 4000
RCGX 060D F		6.35	5.00	8.35	3.00				
RCGX 090D F		9.52	6.00	20.00	4.00				
RCGX 120D F		12.70	6.00	20.00	5.88				

RNGN




Type		Dimensions (mm)					
ISO	ASA	d	t	SBN 1000	SBN 2000	SBN 3000	SBN 4000
RNGN 090300 F	RNGN 320 F	9.52	3.18				
RNGN 120400 F	RNGN 430 F	12.70	4.76				

RPGN

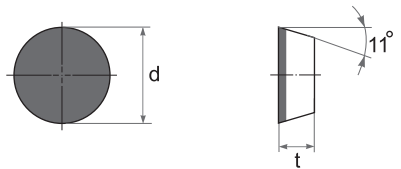

Type		Dimensions (mm)					
ISO	ASA	d	t	SBN 1000	SBN 2000	SBN 3000	SBN 4000
RPGN 090300 F	RPGN 320 F	9.52	3.18				
RPGN 120300 F	RPGN 420 F	12.70	3.18				
RPGN 120400 F	RPGN 430 F	12.70	4.76				

TBGN

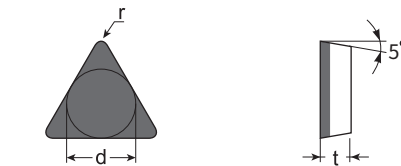


Type		Dimensions (mm)						
ISO	ASA	d	t	r	SBN 1000	SBN 2000	SBN 3000	SBN 4000
TBGN 060102 F		3.97	1.59	0.2				

PCBN


SOLID

CNGN

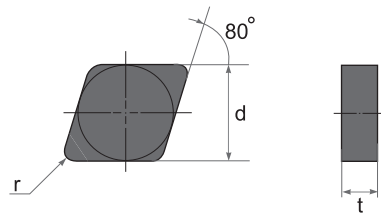


Type		Dimensions (mm)			SBN 5000
ISO	ASA	d	t	r	
CNGN 090308S	CNGN 322S	9.52	3.18	0.8	
CNGN 090312S	CNGN 323S	9.52	3.18	1.2	
CNGN 090316S	CNGN 324S	9.52	3.18	1.6	
CNGN 120408S	CNGN 432S	12.70	4.76	0.8	●
CNGN 120412S	CNGN 433S	12.70	4.76	1.2	●
CNGN 120416S	CNGN 434S	12.70	4.76	1.6	●

RNGN




Type		Dimensions (mm)			SBN 5000
ISO	ASA	d	t		
RNGN 090300S	RNGN 320S	9.52	3.18		●
RNGN 120300S	RNGN 420S	12.70	3.18		●
RNGN 120400S	RNGN 430S	12.70	4.76		●

SNGN

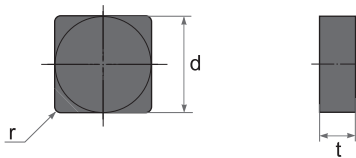

Type		Dimensions (mm)			SBN 5000
ISO	ASA	d	t	r	
SNGN 090308S	SNGN 322S	9.52	3.18	0.8	●
SNGN 090312S	SNGN 323S	9.52	3.18	1.2	●
SNGN 090316S	SNGN 324S	9.52	3.18	1.6	
SNGN 120308S	SNGN 422S	12.70	3.18	0.8	
SNGN 120312S	SNGN 423S	12.70	3.18	1.2	
SNGN 120316S	SNGN 424S	12.70	3.18	1.6	
SNGN 120408S	SNGN 432S	12.70	4.76	0.8	●
SNGN 120412S	SNGN 433S	12.70	4.76	1.2	●
SNGN 120416S	SNGN 434S	12.70	4.76	1.6	●

TNGN




Type		Dimensions (mm)			SBN 5000
ISO	ASA	d	t	r	
TNGN 110308S	TNGN 222S	6.35	3.18	0.8	●
TNGN 110312S	TNGN 223S	6.35	3.18	1.2	●
TNGN 160408S	TNGN 332S	9.52	4.76	0.8	●
TNGN 160412S	TNGN 333S	9.52	4.76	1.2	●
TNGN 160416S	TNGN 334S	9.52	4.76	1.6	

PCBN


SOLID

CNGA

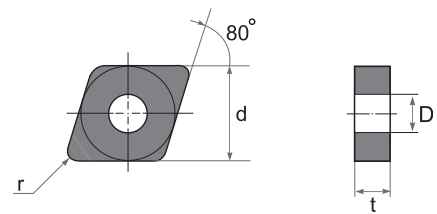


Type		Dimensions (mm)			SBN 5000
ISO	ASA	d	t	r	
CNGA 090308	CNGA 322	9.52	3.18	0.8	3.81
CNGA 090312	CNGA 323	9.52	3.18	1.2	3.81
CNGA 090316	CNGA 324	9.52	3.18	1.6	3.81
CNGA 120408	CNGA 432	12.7	4.76	0.8	5.16
CNGA 120412	CNGA 433	12.7	4.76	1.2	5.16
CNGA 120416	CNGA 434	12.7	4.76	1.6	5.16

RNGA

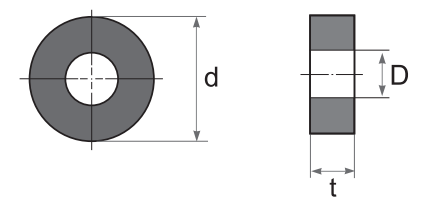


Type		Dimensions (mm)			SBN 5000
ISO	ASA	d	t	r	
RNGA 060300	RNGA 060300	6.35	3.18	-	2.26
RNGA 060400	RNGA 060400	6.35	4.76	-	2.26
RNGA 090300	RNGA 090300	9.52	3.18	-	3.81
RNGA 120300	RNGA 120300	12.7	3.18	-	5.16
RNGA 120400	RNGA 120400	12.7	4.76	-	5.16

SNGA

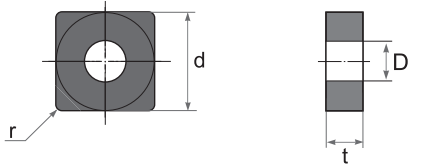

Type		Dimensions (mm)			SBN 5000
ISO	ASA	d	t	r	
SNGA 090308	SNGA 322	9.52	3.18	0.8	3.81
SNGA 090312	SNGA 323	9.52	3.18	1.2	3.81
SNGA 090316	SNGA 324	9.52	3.18	1.6	3.81
SNGA 120308	SNGA 422	9.52	3.18	0.8	5.16
SNGA 120312	SNGA 423	9.52	3.18	1.2	5.16
SNGA 120316	SNGA 424	9.52	3.18	1.6	5.16
SNGA 120408	SNGA 432	12.7	4.76	0.8	5.16
SNGA 120412	SNGA 433	12.7	4.76	1.2	5.16
SNGA 120416	SNGA 434	12.7	4.76	1.6	5.16

TNGA

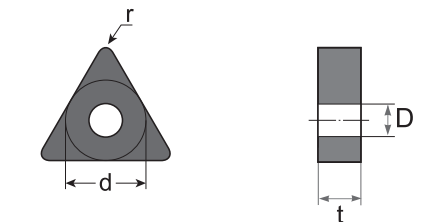


Type		Dimensions (mm)			SBN 5000
ISO	ASA	d	t	r	
TNGA 110308	TNGA 222	6.35	3.18	0.8	2.26
TNGA 110312	TNGA 223	6.35	3.18	1.2	2.26
TNGA 110316	TNGA 224	6.35	3.18	1.6	2.26
TNGA 160408	TNGA 332	9.52	4.76	0.8	3.81
TNGA 160412	TNGA 333	9.52	4.76	1.2	3.81
TNGA 160416	TNGA 334	9.52	4.76	1.6	3.81

PCD


STANDARD

CNGA

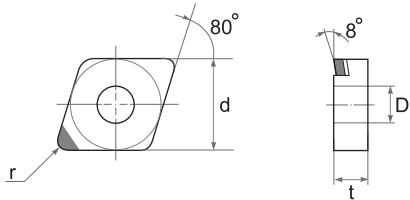


Type		Dimensions (mm)						
ISO	ASA	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
CNGA 120404 R1	CNGA 431 R1	12.70	4.76	0.4	5.16		●	
CNGA 120408 R1	CNGA 432 R1	12.70	4.76	0.8	5.16	●	●	
CNGA 120412 R1	CNGA 433 R1	12.70	4.76	1.2	5.16			

CCGW

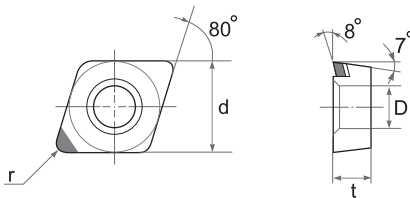


Type		Dimensions (mm)						
ISO		d	t	r	D	SPD 1000	SPD 2000	SPD 3000
CCGW 060202 R1		6.35	2.38	0.2	2.80			
CCGW 060204 R1		6.35	2.38	0.4	2.80		●	
CCGW 060208 R1		6.35	2.38	0.8	2.80		●	
CCGW 09T302 R1		9.52	3.97	0.2	4.40			
CCGW 09T304 R1		9.52	3.97	0.4	4.40	●	●	
CCGW 09T308 R1		9.52	3.97	0.8	4.40		●	
CCGW 120404 R1		12.70	4.76	0.4	5.50		●	
CCGW 120408 R1		12.70	4.76	0.8	5.50		●	
CCGW 120412 R1		12.70	4.76	1.2	5.50			

CPGW

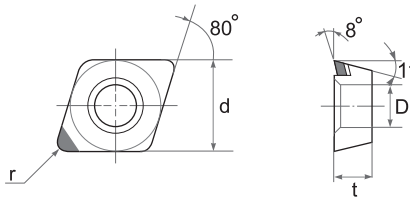

Type		Dimensions (mm)						
ISO		d	t	r	D	SPD 1000	SPD 2000	SPD 3000
CPGW 080204 R1		7.94	2.38	0.4	3.40			
CPGW 080208 R1		7.94	2.38	0.8	3.40			
CPGW 080212 R1		7.94	2.38	1.2	3.40			
CPGW 090304 R1		9.525	3.18	0.4	4.40			
CPGW 090308 R1		9.525	3.18	0.8	4.40			
CPGW 090312 R1		9.525	3.18	1.2	4.40			

DNGA

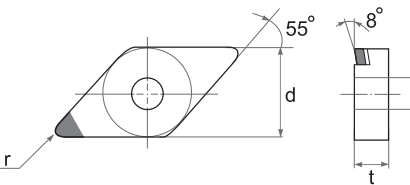


Type		Dimensions (mm)						
ISO	ASA	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
DNGA 150404 R1	DNGA 431 R1	12.70	4.76	0.4	5.16	●	●	
DNGA 150408 R1	DNGA 432 R1	12.70	4.76	0.8	5.16	●	●	
DNGA 150412 R1	DNGA 433 R1	12.70	4.76	1.2	5.16		●	
DNGA 150604 R1	DNGA 441 R1	12.70	6.35	0.4	5.16	●	●	
DNGA 150608 R1	DNGA 442 R1	12.70	6.35	0.8	5.16	●	●	
DNGA 150612 R1	DNGA 443 R1	12.70	6.35	1.2	5.16		●	

PCD


STANDARD

DCGW

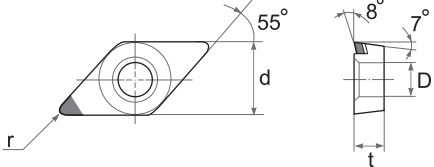


Type		Dimensions (mm)						
ISO		d	t	r	D	SPD 1000	SPD 2000	SPD 3000
DCGW 070202 R1		6.35	2.38	0.2	2.80			
DCGW 070204 R1		6.35	2.38	0.4	2.80	●	●	
DCGW 070208 R1		6.35	2.38	0.8	2.80		●	
DCGW 11T302 R1		9.52	3.97	0.2	4.40			
DCGW 11T304 R1		9.52	3.97	0.4	4.40	●	●	
DCGW 11T308 R1		9.52	3.97	0.8	4.40		●	

SNGA

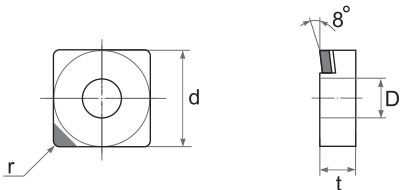


Type		Dimensions (mm)						
ISO	ASA	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
SNGA 120404 R1	SNGA 431 R1	12.70	4.76	0.4	5.16	●	●	
SNGA 120408 R1	SNGA 432 R1	12.70	4.76	0.8	5.16		●	
SNGA 120412 R1	SNGA 433 R1	12.70	4.76	1.2	5.16			

SNGN

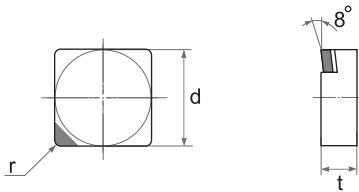

Type		Dimensions (mm)						
ISO	ASA	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
SNGN 120404 R1	SNGN 431 R1	12.70	4.76	0.4		●	●	
SNGN 120408 R1	SNGN 432 R1	12.70	4.76	0.8			●	
SNGN 120412 R1	SNGN 433 R1	12.70	4.76	1.2				

SCGW

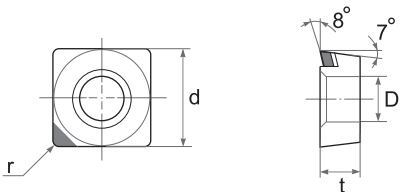


Type		Dimensions (mm)						
ISO		d	t	r	D	SPD 1000	SPD 2000	SPD 3000
SCGW 09T304 R1		9.52	3.97	0.4	4.40	●	●	
SCGW 09T308 R1		9.52	3.97	0.8	4.40		●	
SCGW 09T312 R1		9.52	3.97	1.2	4.40			
SCGW 120402 R1		12.70	4.76	0.2	5.50			
SCGW 120404 R1		12.70	4.76	0.4	5.50	●	●	
SCGW 120408 R1		12.70	4.76	0.8	5.50		●	

PCD


STANDARD

SPGN

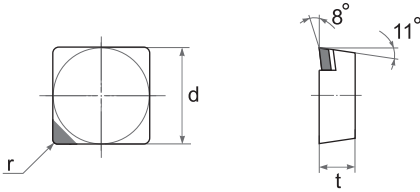


Type		Dimensions (mm)					
ISO	ASA	d	t	r	SPD 1000	SPD 2000	SPD 3000
SPGN 090304 R1	SPGN 321 R1	9.52	3.18	0.4			
SPGN 090308 R1	SPGN 322 R1	9.52	3.18	0.8		●	
SPGN 120304 R1	SPGN 421 R1	12.70	3.18	0.4			
SPGN 120308 R1	SPGN 422 R1	12.70	3.18	0.8		●	

SPGW

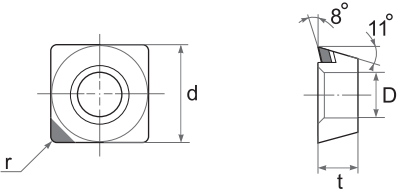


Type		Dimensions (mm)					
ISO	ASA	d	t	r	SPD 1000	SPD 2000	SPD 3000
SPGW 090302 R1	SPGW 3202 R1	9.52	3.18	0.2			
SPGW 090304 R1	SPGW 321 R1	9.52	3.18	0.4			
SPGW 090308 R1	SPGW 322 R1	9.52	3.18	0.8			

TNGA

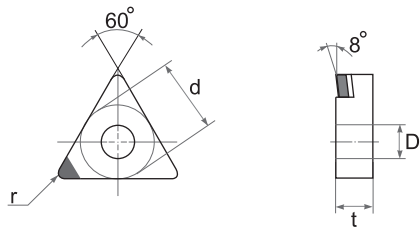

Type		Dimensions (mm)						
ISO	ASA	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
TNGA 160402 R1	TNGA 3302 R1	9.52	4.76	0.2	3.81		●	
TNGA 160404 R1	TNGA 331 R1	9.52	4.76	0.4	3.81	●	●	
TNGA 160408 R1	TNGA 332 R1	9.52	4.76	0.8	3.81		●	
TNGA 160412 R1	TNGA 333 R1	9.52	4.76	1.2	3.81			

TBGW

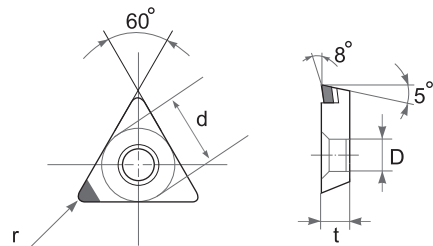


Type	Dimensions (mm)						
ISO	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
TBGW 060102 R1	3.97	1.59	0.2	2.80			
TBGW 060104 R1	3.97	1.59	0.4	2.80			

PCD


STANDARD

TCGW

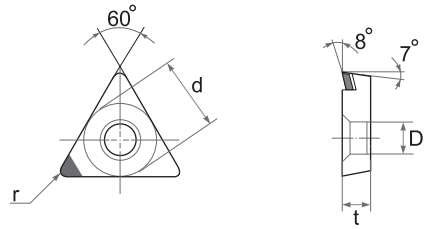


Type		Dimensions (mm)						
ISO		d	t	r	D	SPD 1000	SPD 2000	SPD 3000
TCGW 090202 R1		5.56	2.38	0.2	2.5			
TCGW 090204 R1		5.56	2.38	0.4	2.5	●	●	
TCGW 090208 R1		5.56	2.38	0.8	2.5		●	
TCGW 110202 R1		6.35	2.38	0.2	2.8			
TCGW 110204 R1		6.35	2.38	0.4	2.8	●	●	
TCGW 110208 R1		6.35	2.38	0.8	2.8		●	
TCGW 16T302 R1		9.52	3.97	0.2	4.4			
TCGW 16T304 R1		9.52	3.97	0.4	4.4	●	●	
TCGW 16T308 R1		9.52	3.97	0.8	4.4		●	

TPGN

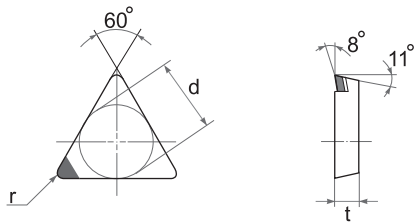

Type		Dimensions (mm)					
ISO	ASA	d	t	r	SPD 1000	SPD 2000	SPD 3000
TPGN 090204 R1	TPGN 721 R1	5.56	2.38	0.4			
TPGN 090208 R1	TPGN 732 R1	5.56	2.38	0.8			
TPGN 110302 R1	TPGN 2202 R1	6.35	3.18	0.2	●	●	●
TPGN 110304 R1	TPGN 221 R1	6.35	3.18	0.4	●	●	●
TPGN 110308 R1	TPGN 222 R1	6.35	3.18	0.8	●	●	●
TPGN 160302 R1	TPGN 3202 R1	9.52	3.18	0.2	●	●	●
TPGN 160304 R1	TPGN 321 R1	9.52	3.18	0.4	●	●	●
TPGN 160308 R1	TPGN 322 R1	9.52	3.18	0.8	●	●	●

TPGB

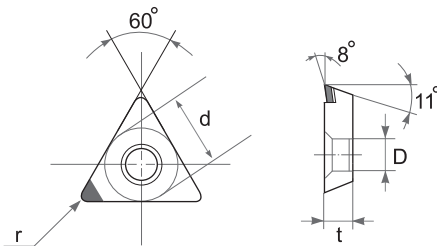


Type	Dimensions (mm)						
ISO	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
TPGB 080204 R1	4.76	2.38	0.4	2.40			
TPGB 080208 R1	4.76	2.38	0.8	2.40			
TPGB 090204 R1	5.56	2.38	0.4	2.50			
TPGB 090208 R1	5.56	2.38	0.8	2.50			
TPGB 110304 R1	6.35	3.18	0.4	3.30		●	
TPGB 110308 R1	6.35	3.18	0.8	3.30		●	

PCD


STANDARD

TPGW

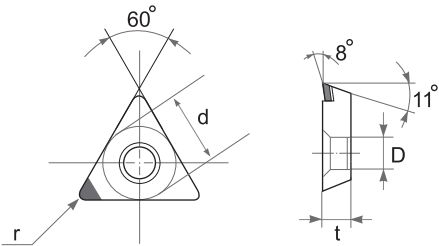


Type		Dimensions (mm)						
ISO		d	t	r	D	SPD 1000	SPD 2000	SPD 3000
TPGW 080202 R1		4.76	2.38	0.2	2.40		●	
TPGW 080204 R1		4.76	2.38	0.4	2.40		●	
TPGW 110302 R1		6.35	3.18	0.2	3.30			
TPGW 110304 R1		6.35	3.18	0.4	3.30		●	
TPGW 110308 R1		6.35	3.18	0.8	3.30			
TPGW 160404 R1		9.52	4.76	0.4	3.81			
TPGW 160408 R1		9.52	4.76	0.8	3.81			

TPGT

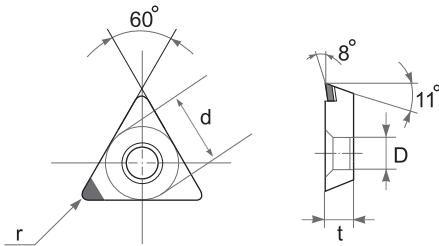


Type		Dimensions (mm)						
ISO		d	t	r	D	SPD 1000	SPD 2000	SPD 3000
TPGT 110302 R1		6.35	3.18	0.2	3.40			
TPGT 110304 R1		6.35	3.18	0.4	3.40			

VNGA

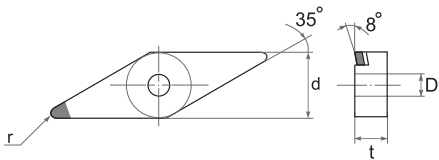

Type		Dimensions (mm)						
ISO	ASA	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
VNGA 160404 R1	VNGA 331 R1	9.52	4.76	0.4	3.18	●	●	
VNGA 160408 R1	VNGA 332 R1	9.52	4.76	0.8	3.18		●	

VBGW

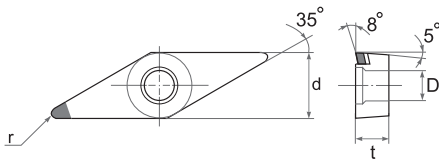


Type		Dimensions (mm)						
ISO	ASA	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
VBGW 110302 R1	VBGW 2202 R1	6.35	3.18	0.2	3.40			
VBGW 110304 R1	VBGW 221 R1	6.35	3.18	0.4	3.40			
VBGW 110308 R1	VBGW 222 R1	6.35	3.18	0.8	3.40			
VBGW 160402 R1	VBGW 3302 R1	9.52	4.76	0.2	4.40			
VBGW 160404 R1	VBGW 331 R1	9.52	4.76	0.4	4.40	●	●	
VBGW 160408 R1	VBGW 332 R1	9.52	4.76	0.8	4.40		●	
VBGW 160412 R1	VBGW 333 R1	9.52	4.76	1.2	4.40			

PCD

STANDARD


VCGW

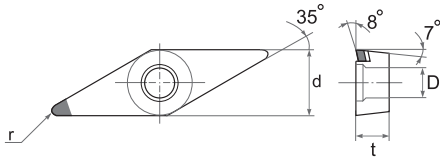

Type		Dimensions (mm)						
ISO	ASA	d	t	r	D	SPD 1000	SPD 2000	SPD 3000
VCGW 110302 R1	VCGW 2202 R1	6.35	3.18	0.2	2.80	●		
VCGW 110304 R1	VCGW 221 R1	6.35	3.18	0.4	3.40	●		
VCGW 110308 R1	VCGW 222 R1	6.35	3.18	0.8	3.40			
VCGW 160404 R1	VCGW 331 R1	9.52	4.76	0.4	4.40			
VCGW 160408 R1	VCGW 332 R1	9.52	4.76	0.8	4.40			
VCGW 160412 R1	VCGW 333 R1	9.52	4.76	1.2	4.40			


SPECIAL

TCGW/TPGW .. FS

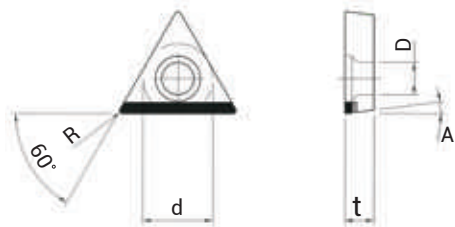

Type	Dimensions (mm)					PCBN				PCD			
ISO	d	t	A	D	r	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
TCGW 0902..FS	6.35	2.38	7°	2.3	0.2 0.4 0.8		●				●		
TCGW 1102..FS	6.35	2.38	7°	2.8	0.2 0.4 0.8		●				●		
TPGW 1103..FS	6.35	2.38	11°	3.3	0.2 0.4 0.8		●				●		


CCGW .. FS

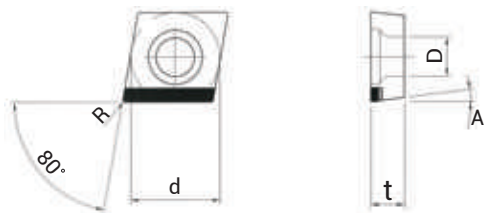

Type	Dimensions (mm)					PCBN				PCD			
ISO	d	t	A	D	r	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
CCGW 0602...FS	6.35	2.38	7°	2.8	0.2 0.4 0.8		●				●		
CCGW 09T3...FS	9.52	3.97	7°	4.4	0.2 0.4 0.8		●				●		
CCGW 1204...FS	12.70	4.76	7°	5.5	0.2 0.4 0.8		●				●		


SPECIAL

SCGW .. FS

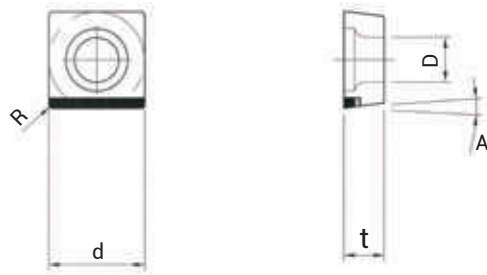

Type	Dimensions (mm)					PCBN				PCD			
ISO	d	t	A	D	r	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
SCGW 0602..FS	6.35	2.38	7°	2.8	0.2 0.4 0.8		●				●		
SCGW 09T3..FS	9.52	3.97	7°	4.4	0.2 0.4 0.8		●				●		
SCGW 1204..FS	12.70	4.76	7°	5.60	0.4 0.8		●				●		

SPGW .. FS

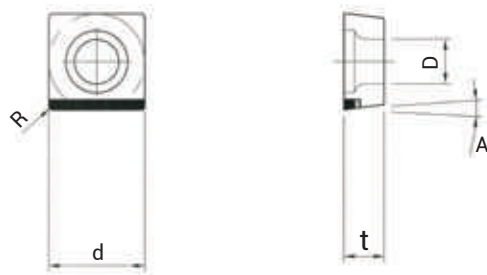


Type	Dimensions (mm)													
	ISO	d	t	A	D	R	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	
SPGW 09T3..FS		9.52	3.97	11°	4.4	0.2 0.4 0.8 1.2		●				●		
SPGW 1204..FS		12.70	4.76	11°	4.4	0.2 0.4 0.8 1.2		●				●		

SPECIAL


MILLING

SPCN

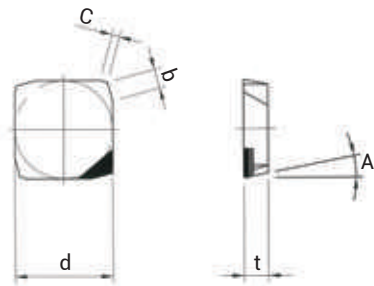

Type	Dimensions (mm)					PCBN				PCD			
ISO	d	t	A	b	c	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
SPCN 1203EDR/L	12.7	3.18	11°	1.4	1								

SPKN

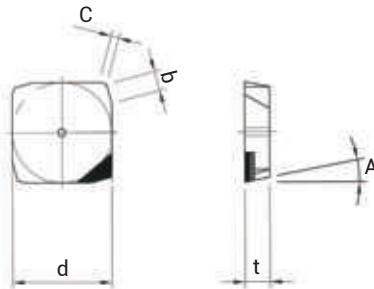


Type	Dimensions (mm)					PCBN				PCD			
ISO	d	t	A	b	c	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
SPCN 1203EDSR	12.7	3.18	11°	1.87	0.86								

SPECIAL


MILLING

SFCN



Type	Dimensions (mm)				PCBN				PCD			
ISO	d	t	A	b	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
SFCN 1203EFR	12.7	3.18	26°	2.5								

TPCN

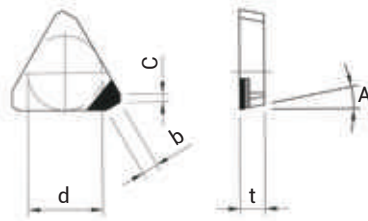


Type	Dimensions (mm)					PCBN				PCD			
ISO	d	t	A	b	c	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
TPCN 1603PPN	9.525	3.18	11°	1.2	1.2								
TPCN 1603PPR	9.525	3.18	11°	1.2	1								
TPCN 2204PDR	12.7	4.76	11°	1.4	0.7								

SPECIAL


GROOVING

UGMR



Type		Dimensions (mm)					PCBN				PCD			
		B	R	L	d	t	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
UGMR	300N-R1.5	3.0	1.5	21.0	2.4	4.8		●				●		
	400N-R2.0	4.0	2.0	21.0	3.3	4.8		●				●		
	500N-R2.5	5.0	2.5	26.0	4.1	5.8		●				●		

UGMT




Type		Dimensions (mm)					PCBN				PCD			
		B	R	L	d	t	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
UGMT	300N-R0.2	3.0	0.2	21.0	2.4	4.8		●				●		
	300N-R0.4	3.0	0.4	21.0	2.4	4.8		●				●		
	400N-R0.2	4.0	2.5	26.0	3.3	4.8		●				●		
	400N-R0.4	4.0	1.5	21.0	3.3	4.8		●				●		
	500N-R0.2	5.0	2.0	26.0	4.1	5.8		●				●		
	500N-R0.4	5.0	2.5	26.0	4.1	5.8		●				●		

SPECIAL

GROOVING

UTGR/L

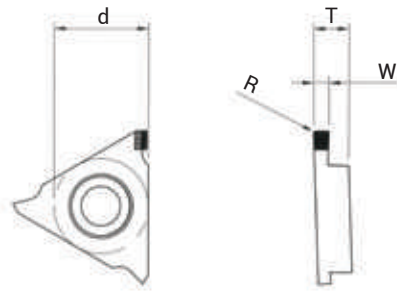


Type		Dimensions (mm)				PCBN				PCD			
		d	T	W	R	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000	SPD 4000
UTGR/L	121002	12.70	4.76	1.0	0.2		●				●		
	121004	12.70	4.76	1.0	0.4		●				●		
	121502	12.70	4.76	1.5	0.2		●				●		
	121504	12.70	4.76	1.5	0.4		●				●		
	122002	12.70	4.76	2.0	0.2		●				●		
	122004	12.70	4.76	2.0	0.4		●				●		
	122502	12.70	4.76	2.5	0.2		●				●		
	122504	12.70	4.76	2.5	0.4		●				●		
	123002	12.70	4.76	3.0	0.2		●				●		
	123004	12.70	4.76	3.0	0.4		●				●		

※ W : Min. 0.8mm ~ Max. 3.5mm
R : Min. 0.05R ~ Max. 1.75R

SPECIAL

NOTCH BITE

NOTCH BITE

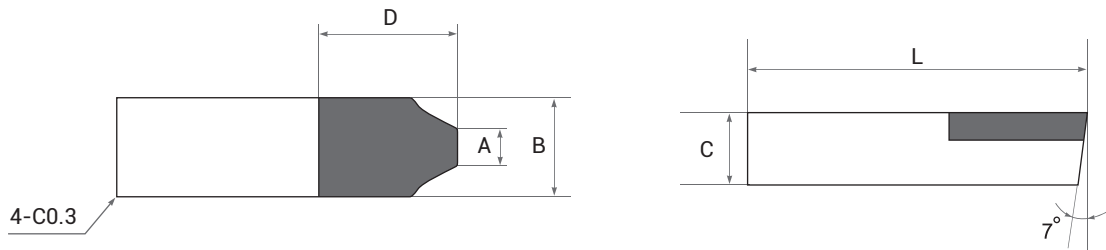


Type	Dimensions (mm)					SBN1000	SPD3000
	A	B	C	D	L		
BITE SD-10	0.80	3.0	2.50	4.0	8.6		
BITE SD-13	0.80	3.5	3.50	4.5	11.5		
BITE SD-16	1.00	5.0	4.00	6.0	14.4		
BITE SD-19	1.00	6.0	4.50	8.0	16.5		
BITE SD-22	1.20	10.0	6.00	10.0	21.0		
BITE SD-25	1.60	10.0	6.00	10.0	24.0		
BITE SD-29	1.70	11.3	6.00	10.0	28.5		
BITE SD-32	1.70	11.3	6.00	10.0	30.0		
BITE SD-35	2.02	12.5	6.00	10.0	33.0		
BITE SD-38	2.39	15.0	6.50	10.0	36.0		
BITE SD-51	4.28	20.0	8.00	10.0	49.0		
BITE SD-57	2.92	22.0	8.00	10.0	56.0		

SPECIAL


ENDMILL

SFE .. 1C

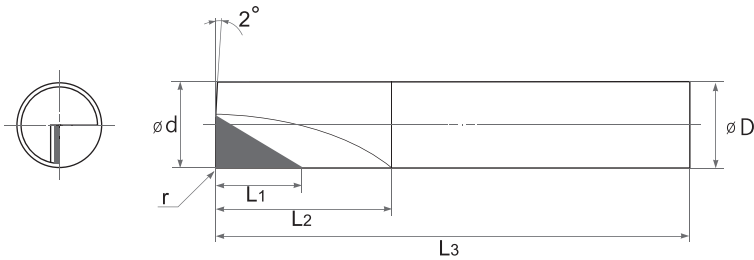

Type	Dimensions (mm)						PCBN				PCD		
	d	D	L ₁	L ₂	L ₃	r	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000
SFE 250-1C	2.0	4.0	4.0	10.0	50.0	0.15						●	
SFE 280-1C	2.0	4.0	4.0	10.0	80.0	0.15						●	
SFE 350-1C	3.0	4.0	4.0	10.0	50.0	0.15						●	
SFE 380-1C	3.0	4.0	4.0	10.0	80.0	0.15						●	
SFE 450-1C	4.0	4.0	6.0	12.0	50.0	0.20						●	
SFE 480-1C	4.0	4.0	6.0	12.0	80.0	0.20						●	
SFE 650-1C	6.0	6.0	6.0	16.0	50.0	0.20						●	
SFE 6100-1C	6.0	6.0	6.0	16.0	100.0	0.20						●	
SFE 860-1C	8.0	8.0	7.0	16.0	60.0	0.40						●	
SFE 8120-1C	8.0	8.0	7.0	16.0	120.0	0.40						●	
SFE 1070-1C	10.0	10.0	7.0	16.0	70.0	0.40						●	
SFE 10120-1C	10.0	10.0	7.0	16.0	120.0	0.40						●	

SFE .. 2C

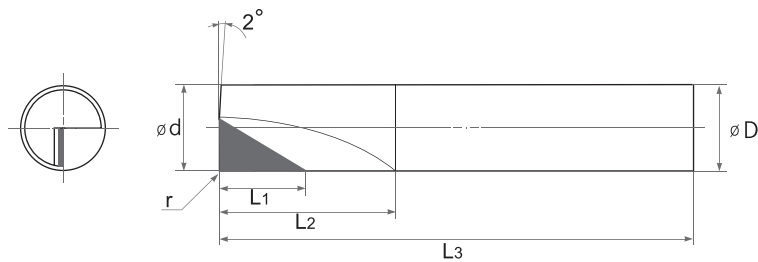


Type	Dimensions (mm)						PCBN				PCD		
	d	D	L ₁	L ₂	L ₃	r	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000
SFE 650-2C	6.0	6.0	4.0	12.0	50.0	0.20						●	
SFE 680-2C	6.0	6.0	6.0	16.0	80.0	0.20						●	
SFE 860-2C	8.0	8.0	7.0	16.0	60.0	0.20						●	
SFE 8120-2C	8.0	8.0	9.0	20.0	120.0	0.40						●	
SFE 1070-2C	10.0	10.0	9.0	20.0	70.0	0.40						●	
SFE 10120-2C	10.0	10.0	12.0	25.0	120.0	0.80						●	
SFE 1270-2C	12.0	12.0	12.0	25.0	70.0	0.80						●	
SFE 12120-2C	12.0	12.0	16.0	30.0	120.0	1.00						●	
SFE 16100-2C	16.0	16.0	16.0	25.0	100.0	0.80						●	
SFE 16150-2C	16.0	16.0	20.0	30.0	150.0	1.00						●	
SFE 18100-2C	18.0	18.0	20.0	30.0	100.0	0.80						●	
SFE 18200-2C	18.0	18.0	24.0	35.0	200.0	1.20						●	
SFE 20100-2C	20.0	20.0	24.0	35.0	100.0	0.80						●	
SFE 20200-2C	20.0	20.0	28.0	40.0	200.0	1.20						●	

SPECIAL


ENDMILL

SBE .. 1C

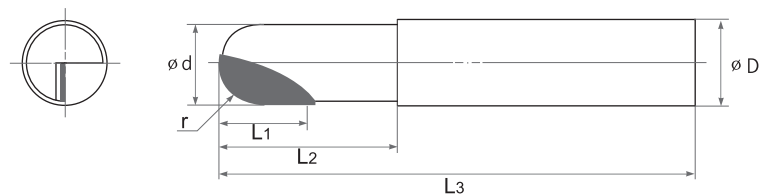

Type	Dimensions (mm)						PCBN				PCD		
ISO	d	D	L ₁	L ₂	L ₃	r	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000
SBE 250-1C	2.0	4.0	4.0	12.0	50.0	1.0							
SBE 280-1C	2.0	4.0	4.0	16.0	80.0	1.0							
SBE 350-1C	3.0	4.0	4.0	16.0	50.0	1.5						●	
SBE 380-1C	3.0	4.0	6.0	30.0	80.0	1.5						●	
SBE 450-1C	4.0	4.0	4.0	16.0	50.0	2.0						●	
SBE 480-1C	4.0	4.0	6.0	40.0	80.0	2.0						●	
SBE 650-1C	6.0	6.0	6.0	20.0	50.0	3.0						●	
SBE 6100-1C	6.0	6.0	8.0	50.0	100.0	3.0						●	
SBE 860-1C	8.0	8.0	8.0	30.0	60.0	4.0						●	
SBE 8120-1C	8.0	8.0	10.0	60.0	120.0	4.0						●	
SBE 1080-1C	10.0	10.0	10.0	30.0	80.0	5.0						●	
SBE 10160-1C	10.0	10.0	12.0	60.0	160.0	5.0							
SBE 12100-1C	12.0	12.0	12.0	40.0	100.0	6.0							
SBE 12200-1C	12.0	12.0	16.0	80.0	200.0	6.0							
SBE 16160-1C	16.0	16.0	16.0	60.0	160.0	8.0							
SBE 16250-1C	16.0	16.0	20.0	100.0	250.0	8.0							

SBE .. 2C

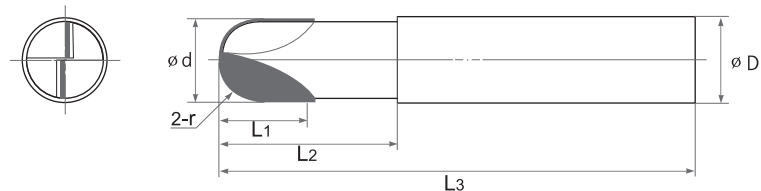

Type	Dimensions (mm)						PCBN				PCD		
ISO	d	D	L ₁	L ₂	L ₃	r	SBN 1000	SBN 2000	SBN 3000	SBN 4000	SPD 1000	SPD 2000	SPD 3000
SBE 650-2C	6.0	6.0	6.0	20.0	50.0	3.0							
SBE 6100-2C	6.0	6.0	8.0	50.0	100.0	3.0							
SBE 860-2C	8.0	8.0	8.0	30.0	60.0	4.0						●	
SBE 8120-2C	8.0	8.0	10.0	60.0	120.0	4.0						●	
SBE 1080-2C	10.0	10.0	10.0	30.0	80.0	5.0							
SBE 10160-2C	10.0	10.0	12.0	60.0	160.0	5.0							
SBE 12100-2C	12.0	12.0	12.0	40.0	100.0	6.0							
SBE 12200-2C	12.0	12.0	16.0	80.0	200.0	6.0							


SPECIAL

HSK - TOOL




SPECIAL

PCD ENDMILL

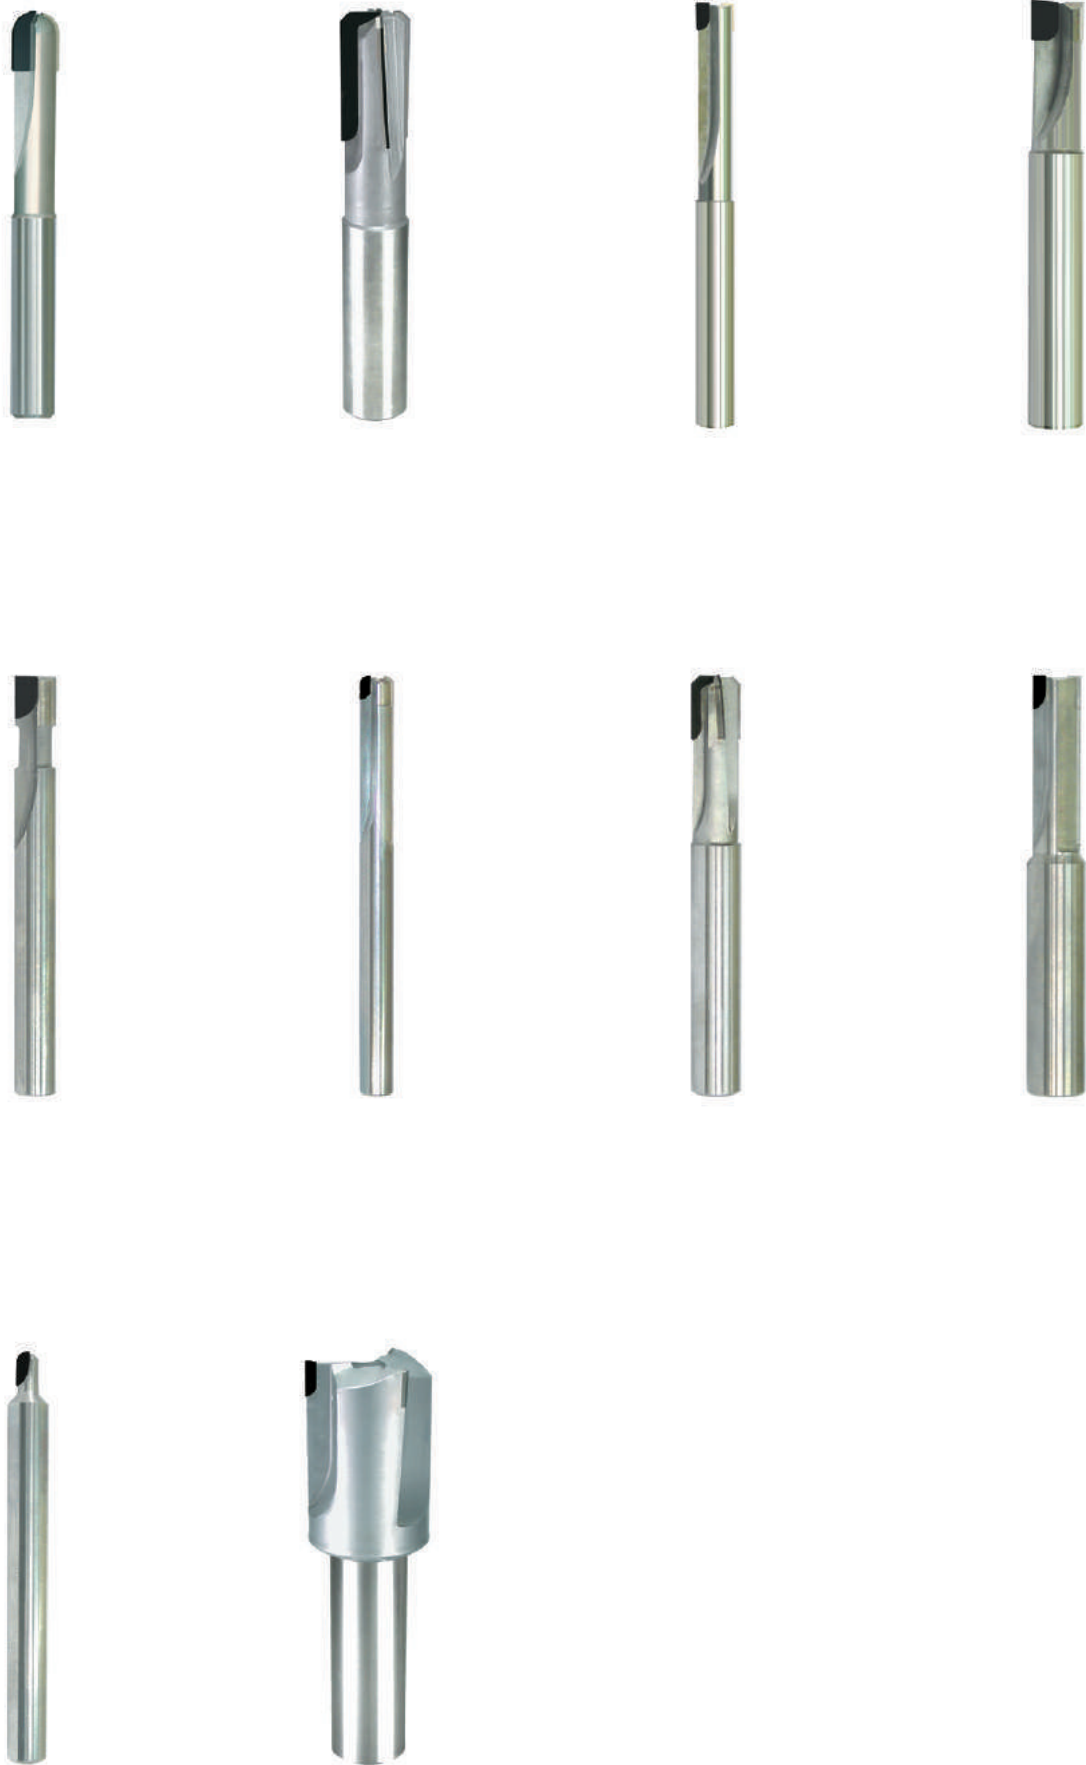


SPECIAL

PCD DRILL / GUN REAMER

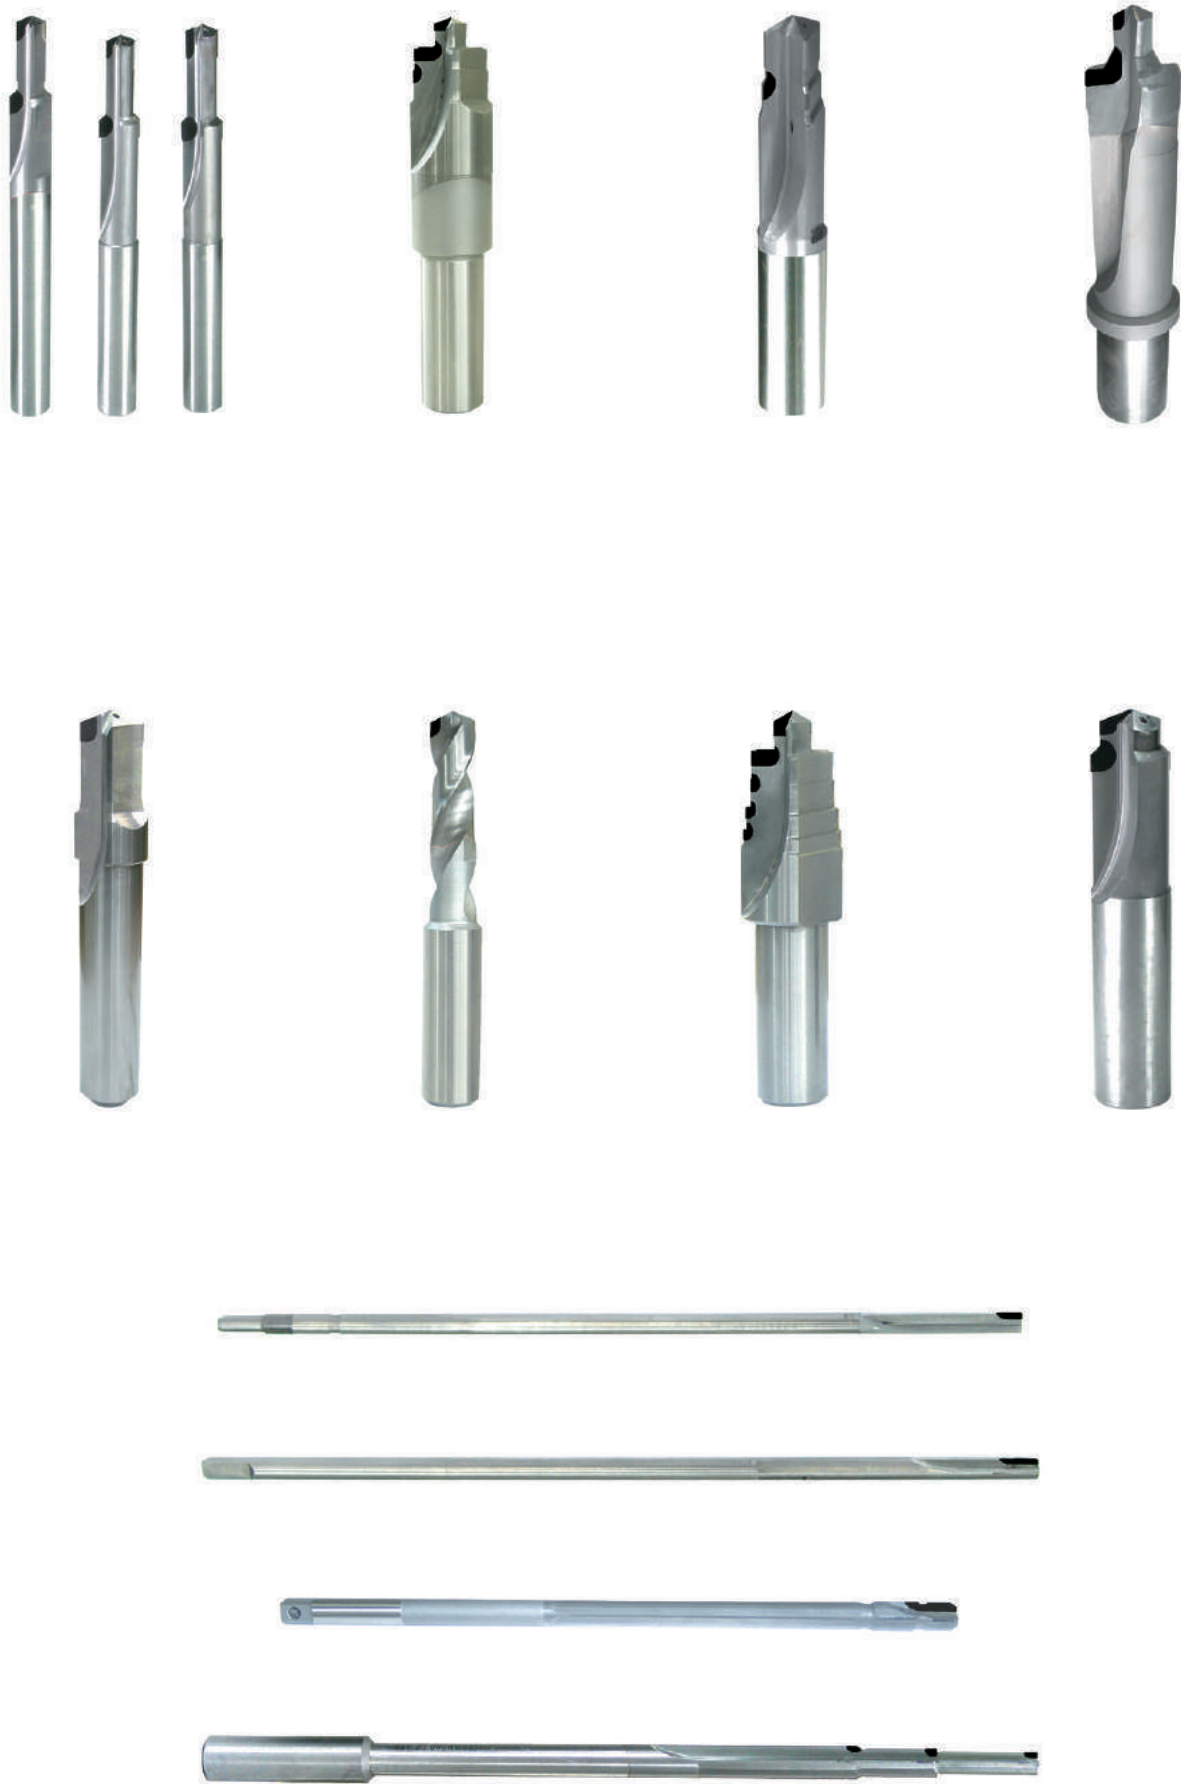


TOOL HOLDER

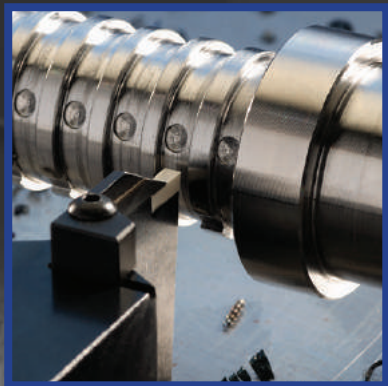







APPLICATION INDEX	A 140
IDENTIFICATION SYSTEM	A 142
EXTERNAL TOOLHOLDER	A 144
SPECIAL	A 181

APPLICATION INDEX





IDENTIFICATION SYSTEM


C
1 **C**
2 **L**
3 **N**
4 **R**
5 **25**
6

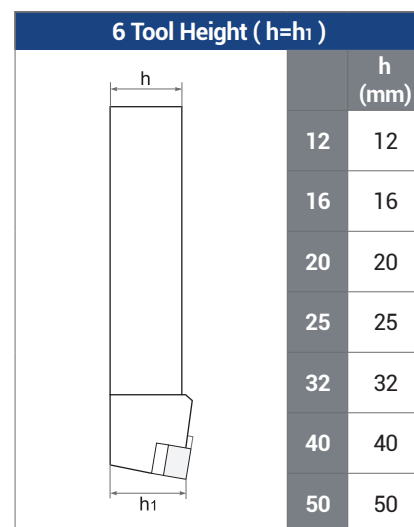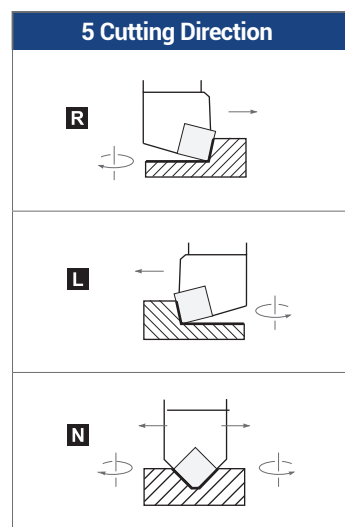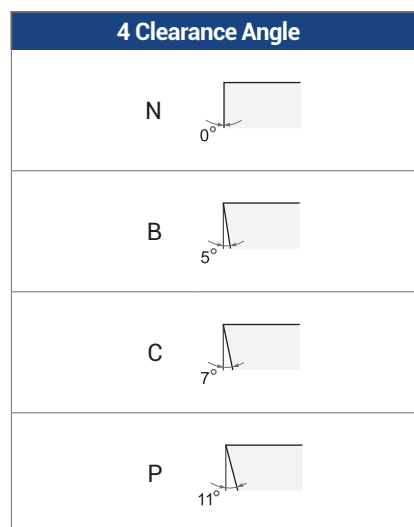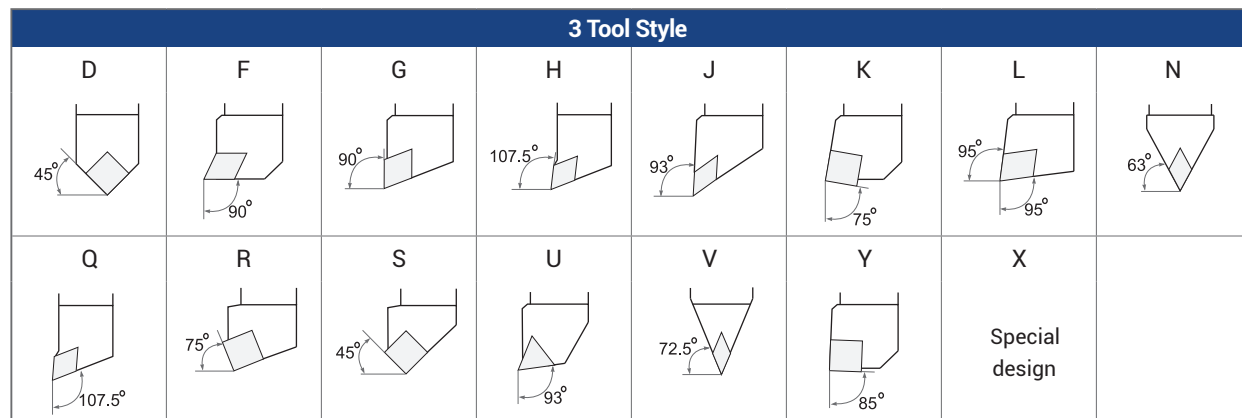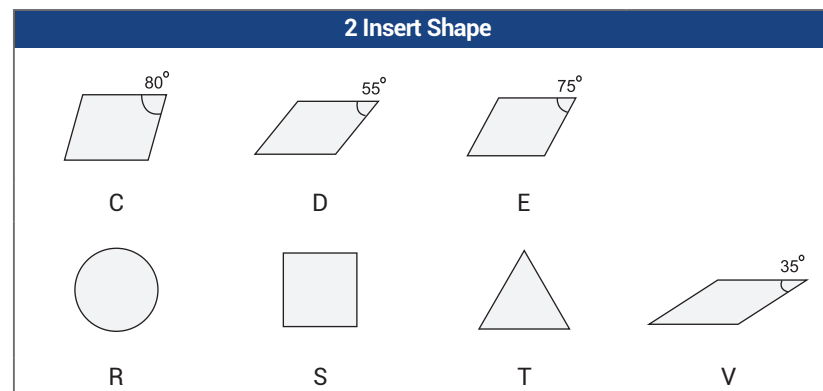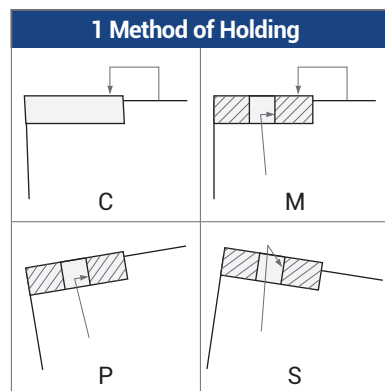

25
7 **M**
8 **12**
9 **-**
10 **A**
11 **7**

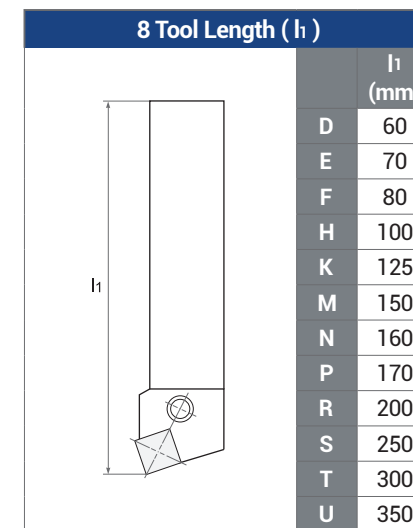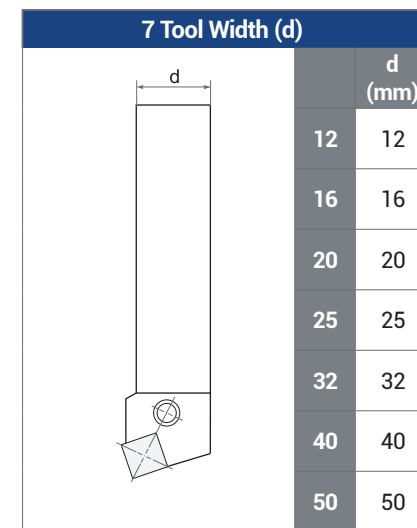



9 Insert Size						
Inscribed Circle						
d (mm)	R, S		T (60°)	C (80°)	E (75°)	V (35°)
5.56			09			
6.35	06		11			
7.94	07		13			
9.52	09		16	09		16
12.70	12		22	12	13	22
15.87	15		27	16		
19.05	19		33	19		
25.40	25		44	25		

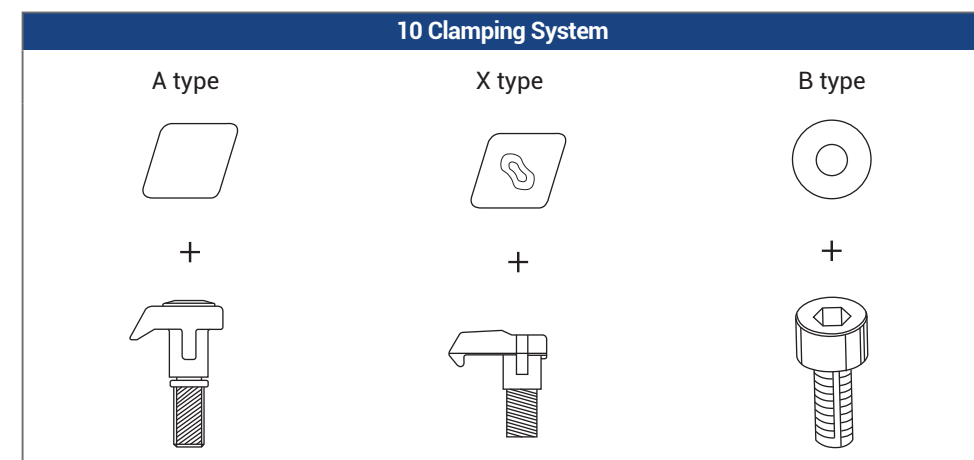

11 Insert Thickness	
Index	S (mm)
3	3.18
4	4.76
6	6.35
7	7.94
9	9.52

EXTERNAL TOOLHOLDER

CCLN

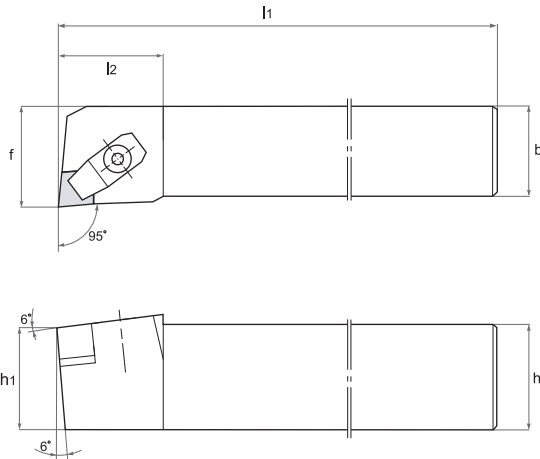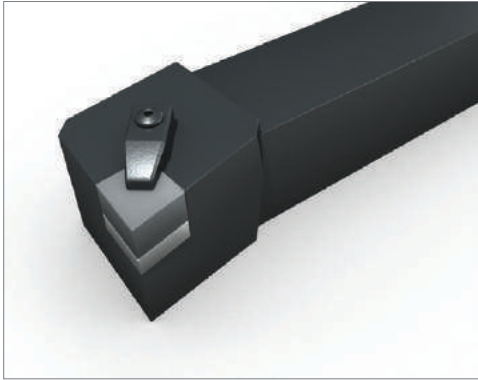



Type	Dimensions (mm)						Stock		Insert	Spare Parts			
	h(h _i)	b	l ₁	l ₂	f		R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CCLNR/L 2525M12-A4	25	25	150	27	32		●	●	CNGN1204	UH1	SHCN4A	BM510	LW4
CCLNR/L 2525M12-A7	25	25	150	27	32		●	●	CNGN1207	UH1	SHCN4A	BM510	LW4
CCLNR/L 2525M12-X7	25	25	150	27	32		●	●	CNG(V)X1207	UH5	SHCN4A	BM510	LW4
CCLNR/L 3225P12-A4	32	25	170	27	32		●	●	CNGN1204	UH1	SHCN4A	BM510	LW4
CCLNR/L 3225P12-A7	32	25	170	27	32		●	●	CNGN1207	UH1	SHCN4A	BM510	LW4
CCLNR/L 3225P12-X7	32	25	170	27	32		●	●	CNG(V)X1207	UH5	SHCN4A	BM510	LW4
CCLNR/L 3225P16-X7	32	25	170	27	32		●		CNG(V)X1607	UH5	SHCN5A	FM510S	LW4
CCLNR/L 3225P16-A7	32	25	170	27	32				CNGN1607	UH1	SHCN5A	FM510S	LW4
CCLNR/L 4040S19-A7	40	40	250	40	50				CNGN1907	UH4	SHCN6A	FM615S	LW5
CCLNR/L 5050T25-A9	50	50	300	43	60				CNGN2509	UH4	SHCN8A	FM815S	LW5

Spare parts											
Clamp & Clamp Screw			Shim				Shim Screw				Wrench
UH1	UH4	UH5	SHCN4A	SHCN5A	SHCN6A	SHCN8	BM510	FM510	FM615	FM815	LW4 LW5

CNGN	CNGX	CNVX
Page 26	Page 28	Page 28

EXTERNAL TOOLHOLDER

CCBN

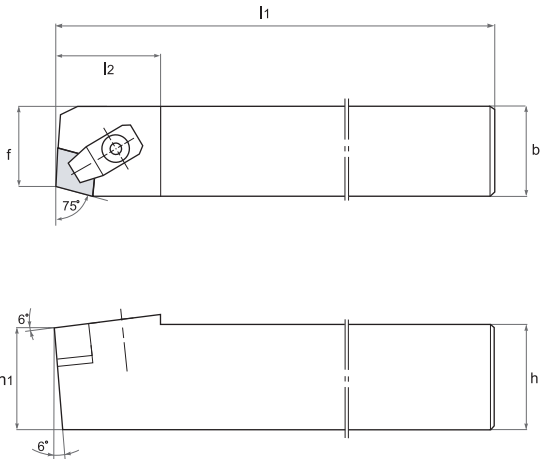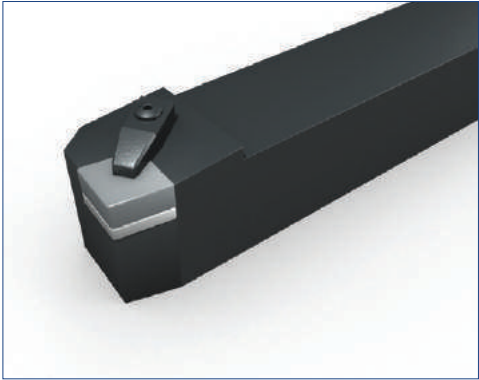



Type	Dimensions (mm)						Stock		Insert	Spare Parts			
	h(h _i)	b	l ₁	l ₂	f		R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CCBNR/L 2525M12-A4	25	25	150	27	22		●		CNGN1204	UH1	SHCN4A	BM510	LW4
CCBNR/L 2525M12-A7	25	25	150	27	22		●		CNGN1207	UH1	SHCN4A	BM510	LW4
CCBNR/L 2525M12-X7	25	25	150	27	22				CNG(V)X1207	UH5	SHCN4A	BM510	LW4
CCBNR/L 3225P12-A4	32	25	170	27	22				CNGN1204	UH1	SHCN4A	BM510	LW4
CCBNR/L 3225P12-A7	32	25	170	27	22				CNGN1207	UH1	SHCN4A	BM510	LW4
CCBNR/L 3225P12-X7	32	25	170	27	22				CNG(V)X1207	UH5	SHCN4A	BM510	LW4
CCBNR/L 3225P16-A7	32	25	170	27	27				CNGN1607	UH1	SHCN5A	FM510S	LW4
CCBNR/L 3225P16-X7	32	25	170	27	27				CNG(V)X1607	UH5	SHCN5A	FM510S	LW4
CCBNR/L 4040S19-A7	40	40	250	40	36				CNGN1907	UH4	SHCN6A	FM615S	LW5
CCBNR/L 5050T25-A9	50	50	300	43	45				CNGN2509	UH4	SHCN8A	FM815S	LW5

Spare parts											
Clamp & Clamp Screw			Shim				Shim Screw				Wrench
UH1	UH4	UH5	SHCN4A	SHCN5A	SHCN6A	SHCN8	BM510	FM51	FM615	FM815S	LW4 LW5

CNGN	CNGX	CNVX
Page 26	Page 28	Page 28




EXTERNAL TOOLHOLDER

CCKN

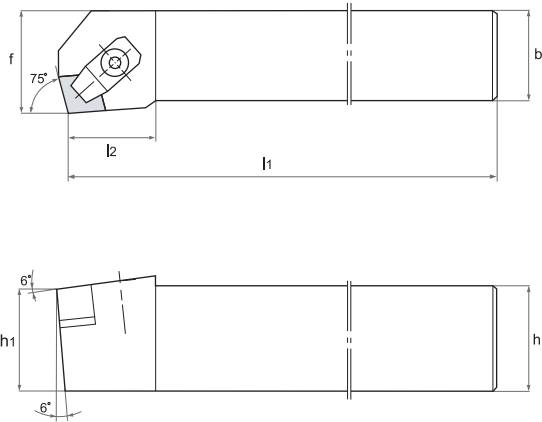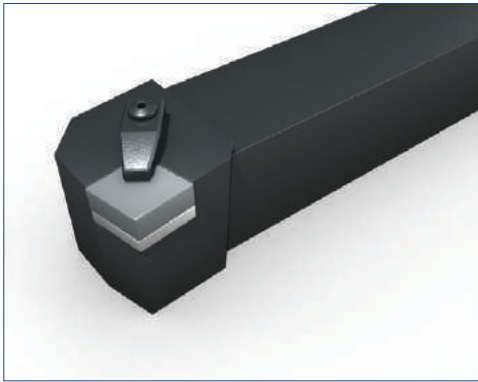



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CCKNR/L 2525M12-A4	25	25	150	24	32			CNGN1204	UH1	SHCN4A	BM510	LW4
CCKNR/L 2525M12-A7	25	25	150	24	32	●	●	CNGN1207	UH1	SHCN4A	BM510	LW4
CCKNR/L 2525M12-X7	25	25	150	24	32	●	●	CNG(V)X1207	UH5	SHCN4A	BM510	LW4
CCKNR/L 3225P12-A4	32	25	170	24	32			CNGN1204	UH1	SHCN4A	BM510	LW4
CCKNR/L 3225P12-A7	32	25	170	24	32		●	CNGN1207	UH1	SHCN4A	BM510	LW4
CCKNR/L 3225P12-X7	32	25	170	24	32	●	●	CNG(V)X1207	UH5	SHCN4A	BM510	LW4

Spare parts				
Clamp & Clamp Screw		Shim	Shim Screw	Wrench
				
UH1	UH5	SHCN4A	BM510	LW4

CNGN	CNGX	CNVX
		
Page 26	Page 28	Page 28

EXTERNAL TOOLHOLDER

CDHN

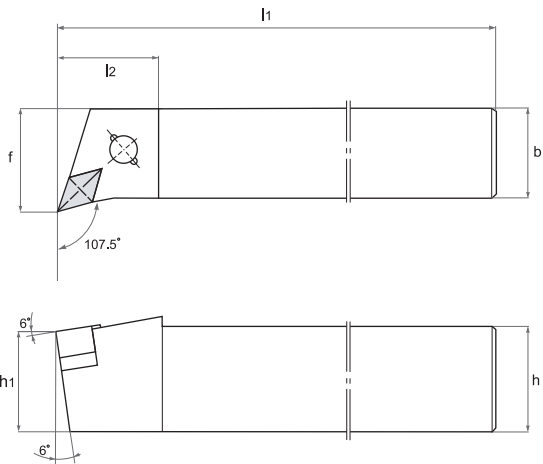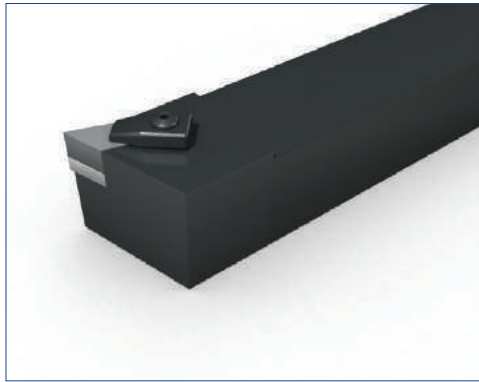



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CDHNR/L 2525M15-A4	25	25	150	33	32	●		DNGN1504	UH24S	SHDN4A	BM510	LW4
CDHNR/L 2525M15-A7	25	25	150	33	32	●	●	DNGN1507	UH24S	SHDN4A	BM510	LW4
CDHNR/L 2525M12-X7	25	25	150	30	32			DNGX1207	UH5	SHDN3A	TM3508	LW4
CDHNR/L 2525M15-X7	25	25	150	33	32			DNGX1507	UH24	SHDN4A	BM510	LW4
CDHNR/L 3225P15-A4	32	25	170	33	32			DNGN1504	UH24S	SHDN4A	BM510	LW4
CDHNR/L 3225P15-A7	32	25	170	33	32			DNGN1507	UH24S	SHDN4A	BM510	LW4
CDHNR/L 3225P12-X7	32	25	170	30	32			DNGX1207	UH5	SHDN3A	TM3508	LW4
CDHNR/L 3225P15-X7	32	25	170	33	32			DNGX1507	UH24	SHDN4A	BM510	LW4

Spare parts				
Clamp & Clamp Screw		Shim	Shim Screw	Wrench
			 	
UH24S	UH5	SHDN3A	SHDN4A	TM3508 BM510

DNGN	DNGX
	
Page 33	Page 34

EXTERNAL TOOLHOLDER

CDJN

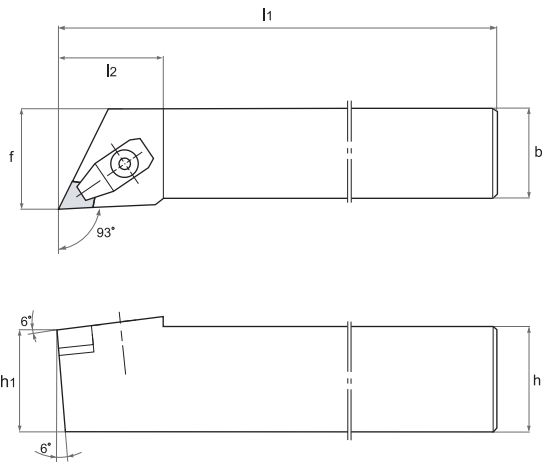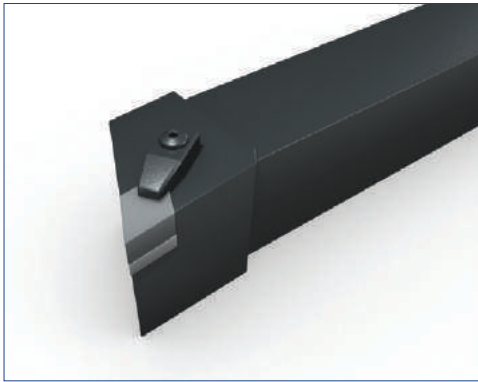



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CDJNR/L 2525M15-A4	25	25	150	38	32	●		DNGN1504	UH24S	SHDN4A	BM510	LW4
CDJNR/L 2525M15-A7	25	25	150	38	32	●	●	DNGN1507	UH24S	SHDN4A	BM510	LW4
CDJNR/L 2525M12-X7	25	25	150	38	32	●	●	DNGX1207	UH5	SHDN3A	TM3508	LW4
CDJNR/L 2525M15-X7	25	25	150	38	32		●	DNGX1507	UH5	SHDN4A	BM510	LW4
CDJNR/L 3225P15-A4	32	25	170	38	32			DNGN1504	UH24S	SHDN4A	BM510	LW4
CDJNR/L 3225P15-A7	32	25	170	38	32	●	●	DNGN1507	UH24S	SHDN4A	BM510	LW4
CDJNR/L 3225P12-X7	32	25	170	38	32		●	DNGX1207	UH5	SHDN3A	TM3507	LW4
CDJNR/L 3225P15-X7	32	25	170	38	32	●		DNGX1507	UH5	SHDN4A	BM510	LW4

Spare parts						
Clamp & Clamp Screw		Shim		Shim Screw		Wrench
						
UH24S	UH5	SHDN3A	SHDN4A	TM3507	BM510	LW4

DNGN	DNGX
	
Page 33	Page 34

EXTERNAL TOOLHOLDER

CDNN

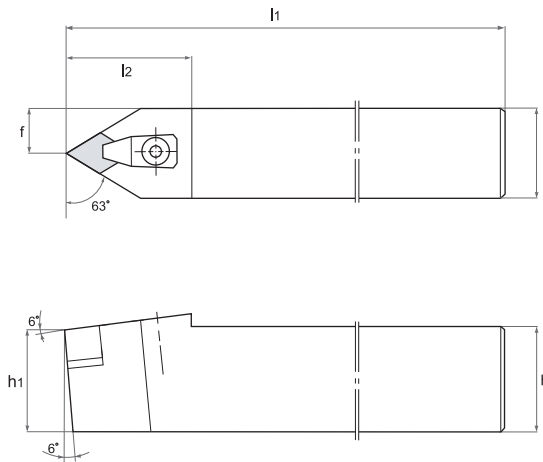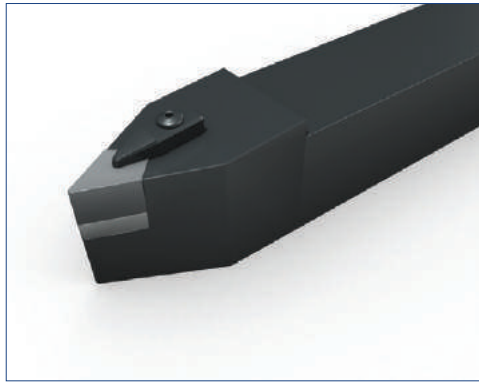

Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CDNNN 2525M15-A4	25	25	150	40	12.5			DNGN1504	UH24S	SHDN4A	BM510	LW4
CDNNN 2525M15-A7	25	25	150	40	12.5			DNGN1507	UH24S	SHDN4A	BM510	LW4
CDNNN 4025M15-A7	40	25	150	40	12.5			DNGN1507	UH24S	SHDN4A	BM510	LW4



Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
			
UH24S	SHDN4A	BM510	LW4

DNGN

Page 33

EXTERNAL TOOLHOLDER


CEFN

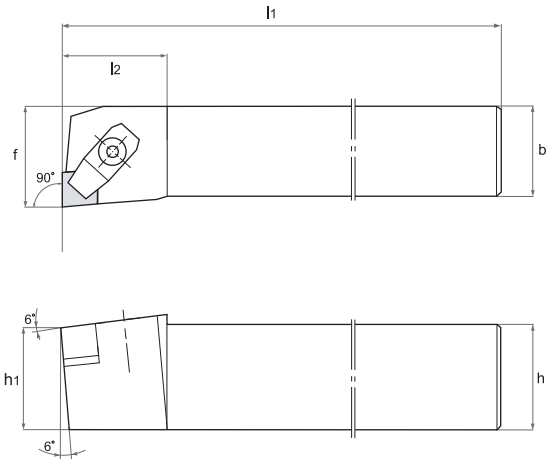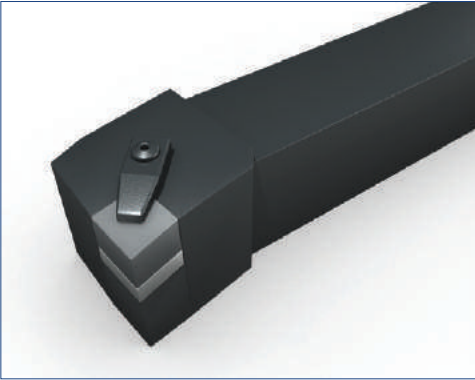

Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CEFNR/L 2525M13-A7	25	25	150	27	32			ENG1307	UH1	SHEN4A	BM510	LW4
CEFNR/L 3225P13-A7	32	25	170	27	32			ENG1307	UH1	SHEN4A	BM510	LW4

Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
			
UH1	SHEN4A	BM510	LW4



ENG1307



Page 35

EXTERNAL TOOLHOLDER


CEGN

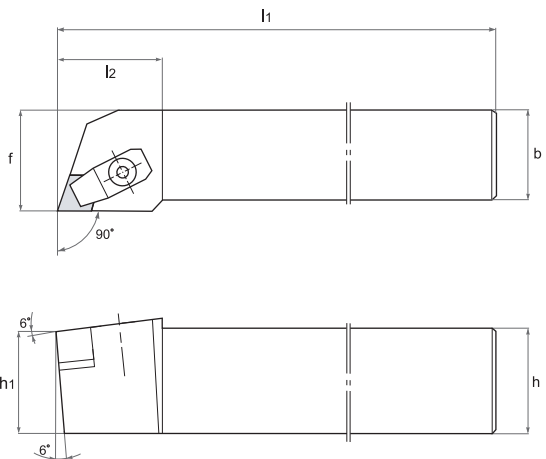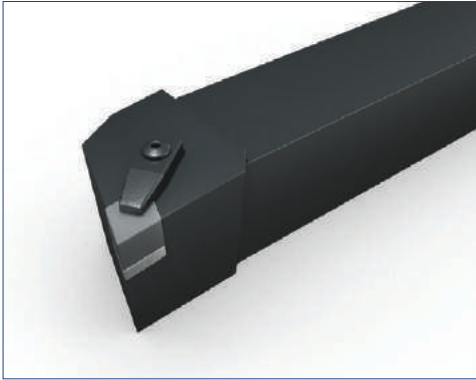

Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CEGNR/L 2525M13-A7	25	25	150	27	32			ENG1307	UH1	SHEN4A	BM510	LW4
CEGNR/L 3225P13-A7	32	25	170	27	32	●	●	ENG1307	UH1	SHEN4A	BM510	LW4

Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
			
UH1	SHEN4A	BM510	LW4



ENG1307



Page 35

EXTERNAL TOOLHOLDER


CEJN

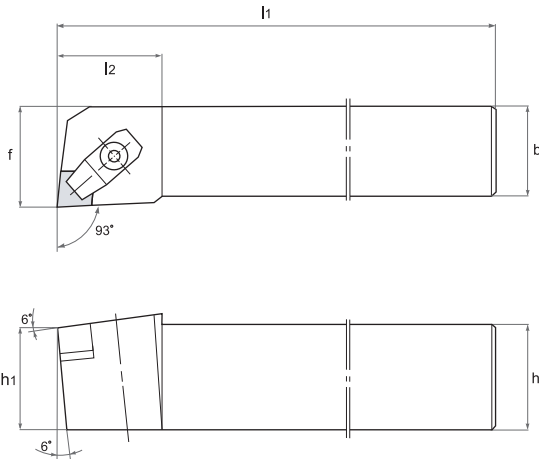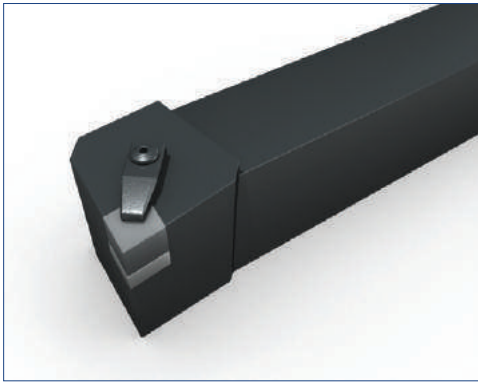

Type	Dimensions (mm)						Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f		R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CEJNR/L 2525M13-A7	25	25	150	27	32		●	●	ENG1307	UH1	SHEN4A	BM510	LW4
CEJNR/L 3225P13-A7	32	25	170	27	32				ENG1307	UH1	SHEN4A	BM510	LW4

Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
			
UH1	SHEN4A	BM510	LW4



ENG1307



Page 35

EXTERNAL TOOLHOLDER

CRDN

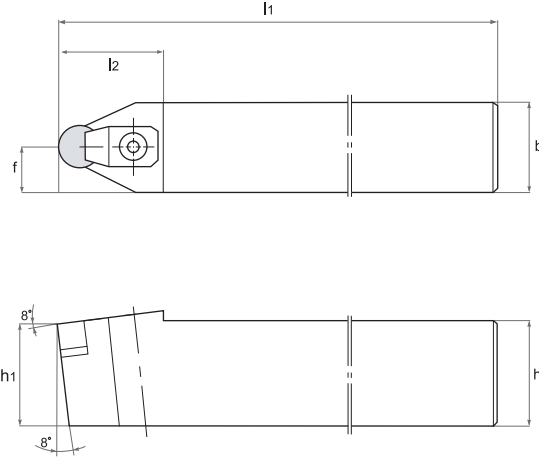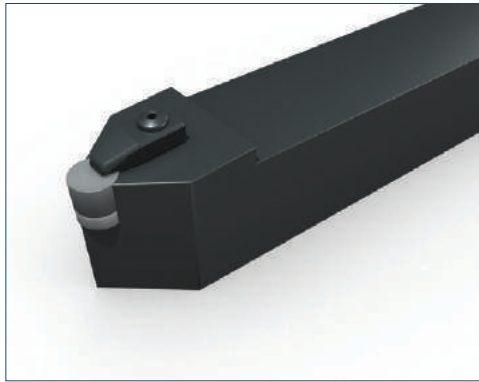

Type	Dimensions (mm)						Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f		R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CRDNN 2525M09-A4	25	25	150	32	12.5		●		RNGN0904	UH1	SHRN3A	TM3507	LW4
CRDNN 2525M09-A7	25	25	150	32	12.5		●		RNGN0907	UH1	SHRN3A	TM3507	LW4
CRDNN 2525M12-A4	25	25	150	32	12.5				RNGN1204	UH1	SHRN4A	BM510	LW4
CRDNN 2525M12-A7	25	25	150	32	12.5		●		RNGN1207	UH1	SHRN4A	BM510	LW4
CRDNN 2525M12-X7	25	25	150	32	12.5				RNGX1207	UH5	SHRN4A	BM510	LW4
CRDNN 3225P12-A4	32	25	170	32	12.5				RNGN1204	UH1	SHRN4A	BM510	LW4
CRDNN 3225P12-A7	32	25	170	32	12.5		●		RNGN1207	UH1	SHRN4A	BM510	LW4
CRDNN 3225P12-X7	32	25	170	32	12.5				RNGX1207	UH5	SHRN4A	BM510	LW4
CRDNN 3225P15-A7	32	25	170	32	12.5				RNGN1507	UH1	SHRN5A	BM510	LW4
CRDNN 3225P19-A7	32	25	170	32	12.5		●		RNGN1907	UH4	SHRN6A	FM510	LW5

Spare parts											
Clamp & Clamp Screw			Shim			Shim Screw			Wrench		
											
UH1	UH4	UH5	SHRN3A	SHRN4A	SHRN5A	SHRN6	BM510	TM3507	FM512	LW4	LW6

RNGN



Page 36



RNGX .. DP



Page 38

EXTERNAL TOOLHOLDER

CRGN

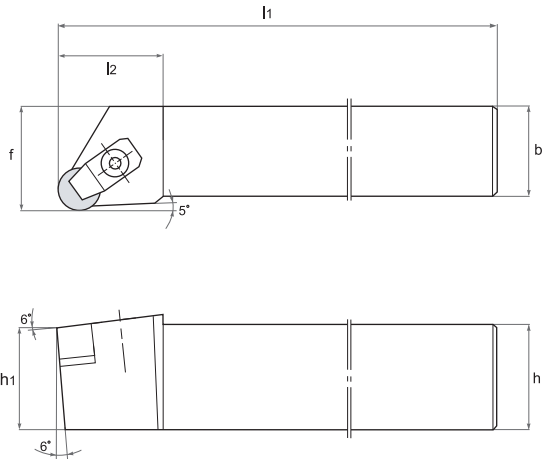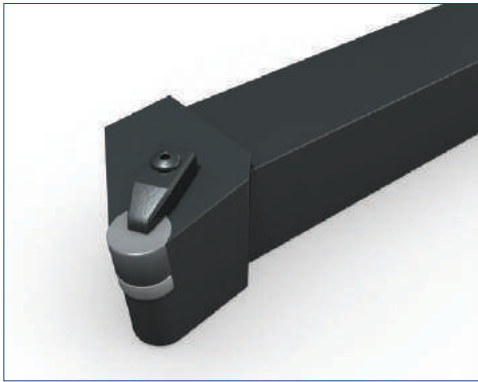



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CRGNR/L 2525M09-A4	25	25	150	32	32			RNGN0904	UH1	SHRN3A	TM3507	LW4
CRGNR/L 2525M09-A7	25	25	150	32	32	●		RNGN0907	UH1	SHRN3A	TM3507	LW4
CRGNR/L 2525M12-A4	25	25	150	35	32	●		RNGN1204	UH1	SHRN4A	BM510	LW4
CRGNR/L 2525M12-A7	25	25	150	35	32	●		RNGN1207	UH1	SHRN4A	BM510	LW4
CRGNR/L 2525M12-X7	25	25	150	35	32	●		RNGX1207	UH5	SHRN4A	BM510	LW4
CRGNR/L 3225P12-A4	32	25	170	35	32	●		RNGN1204	UH1	SHRN4A	BM510	LW4
CRGNR/L 3225P12-A7	32	25	170	35	32	●		RNGN1207	UH1	SHRN4A	BM510	LW4
CRGNR/L 3225P12-X7	32	25	170	35	32			RNGX1207	UH5	SHRN4A	BM510	LW4
CRGNR/L 3225P15-A7	32	25	170	37	32	●		RNGN1507	UH1	SHRN5A	BM510	LW4
CRGNR/L 3225P19-A7	32	25	170	45	32	●		RNGN1907	UH4	SHRN6A	FM510	LW5

Spare parts											
Clamp & Clamp Screw			Shim			Shim Screw			Wrench		
UH1	UH4	UH5	SHRN3A	SHRN4A	SHRN5A	SHRN6	BM510	TM3507	FM510	LW4	LW6

RNGN	RNGX .. DP
Page 36	Page 38

EXTERNAL TOOLHOLDER

CRDB

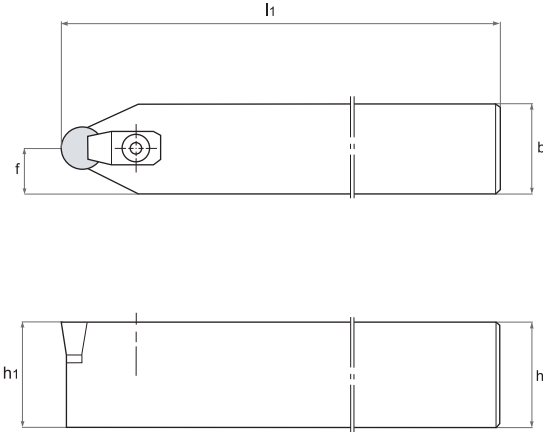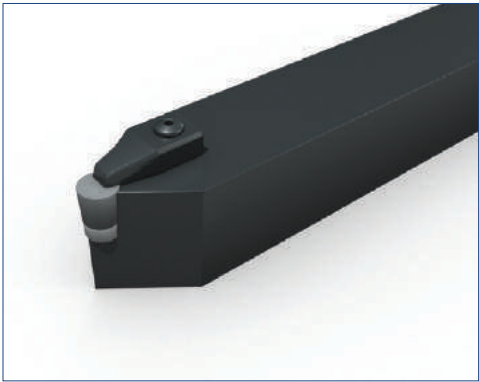



Type	Dimensions (mm)				Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CRDBN 2525M12-A	25	25	150	12.5	●		RBGX12T	UH1	SHRB12	SH3015	LW4
CRDBN 2525M16-A	25	25	150	12.5	●		RBGX16T	UH1	SHRB16	SH3515	LW4
CRDBN 3225P12-A	32	32	170	16	●		RBGX12T	UH1	SHRB12	SH3015	LW4
CRDBN 3225P16-A	32	32	170	16	●		RBGX16T	UH1	SHRB16	SH3515	LW4
CRDBN 3225P20-A	32	32	170	16			RBGX20T	UH4	SHRB20	SH5015	LW5
CRDBN 3225P26-A	32	32	170	16			RBGX26T	UH4	SHRB26	SH6015	LW5

Spare parts											
Clamp & Clamp Screw		Shim				Shim Screw				Wrench	
UH1	UH4	SHRB12	SHRB16	SHRB20	SHRB26	SH3015	SH3515	SH5015	SH6015	LW4	LW6

RBGX
Page 56

EXTERNAL TOOLHOLDER

CRDC

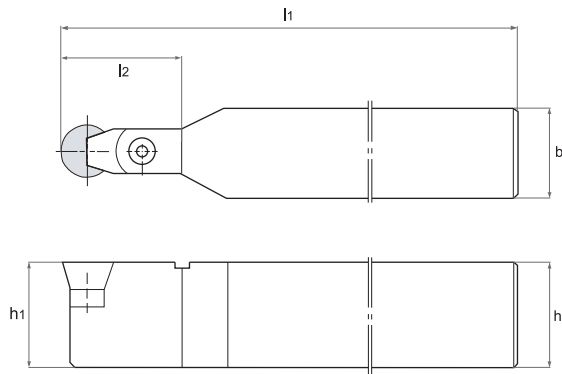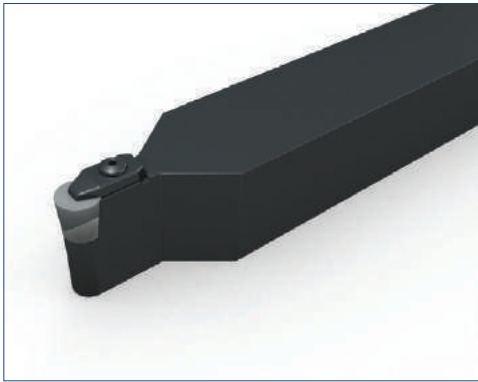



Type	Dimensions (mm)				Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CRDCN 3225P06-A4	32	25	170	20	●		RCGX0604	CLRC6	SHRC102	-	LW3
CRDCN 3225P06-A6	32	25	170	20	●		RCGX0606	CLRC6	SHRC102	-	LW3
CRDCN 3225P06-A7	32	25	170	20	●		RCGX0607	CLRC6	SHRC102	-	LW3
CRDCN 3225P09-A7	32	25	170	20	●		RCGX0907	UH1	SHRC103	FM315S	LW4
CRDCN 3225P12-A7	32	25	170	20	●		RCGX1207	UH1	SHRC104	FM315	LW4
CRDCN 5040T12-A7	50	40	300	30	●		RCGX1207	UH1	SHRC104	FM315	LW4
CRDCN 5040T15-A10	50	40	300	35	●		RCGX1510	UH1	SHRC105	FM415	LW4
CRDCN 5040T19-A10	50	40	300	45			RCGX1910	UH4	SHRC106	FM415	LW6
CRDCN 5040T25-A12	50	40	300	50			RCGX2512	UH4	SHRC108	FM515	LW6

Spare parts										
Clamp & Clamp Screw			Shim			Shim Screw		Wrench		
CLRC6	UH1	UH4	SHRC102	SHRC103	SHRC104	FM210	FM315	LW3	LW4	LW6
			SHRC105	SHRC106	SHRC108	FM415	FM515			



EXTERNAL TOOLHOLDER

CSBN

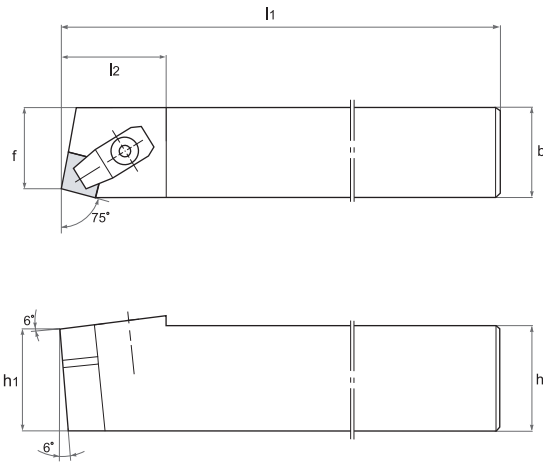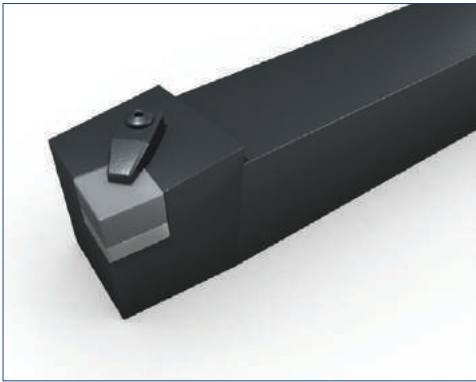



Type	Dimensions (mm)						Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f		R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSBNR/L 2525M12-A4	25	25	150	27	22		●	●	SNGN1204	UH1	SHSN4A	BM510	LW4
CSBNR/L 2525M12-A7	25	25	150	27	22		●	●	SNGN1207	UH1	SHSN4A	BM510	LW4
CSBNR/L 2525M12-X7	25	25	150	27	22		●		SNGX1207	UH5	SHSN4A	BM510	LW4
CSBNR/L 2525M15-A7	25	25	150	34	22				SNGN1507	UH1	SHSN5A	FM512S	LW4
CSBNR/L 2525M15-X7	25	25	150	34	22				SNGX1507	UH5	SHSN5A	FM512S	LW4
CSBNR/L 3225P12-A7	32	25	170	27	22		●	●	SNGN1207	UH1	SHSN4A	BM510	LW4
CSBNR/L 3225P12-X7	32	25	170	27	22		●		SNGX1207	UH5	SHSN4A	BM510	LW4
CSBNR/L 3225P15-A7	32	25	170	34	22		●		SNGN1507	UH1	SHSN5A	FM512S	LW4
CSBNR/L 3225P15-X7	32	25	170	34	22				SNGX1507	UH5	SHSN5A	FM512S	LW4
CSBNR/L 4040S19-A7	40	40	250	45	35				SNGN1907	UH4	SHSN6A	FM615S	LW6
CSBNR/L 5050T25-A9	50	50	300	50	45				SNGN2509	UH4	SHSN8	FM815S	LW6

Spare parts										
Clamp & Clamp Screw			Shim		Shim Screw		Wrench			
UH1	UH4	UH5	SHSN4A	SHSN5A	BM510	FM512S	FM615S	LW4	LW6	
			SHSN6A	SHSN8A		FM815S				



EXTERNAL TOOLHOLDER

CSDN

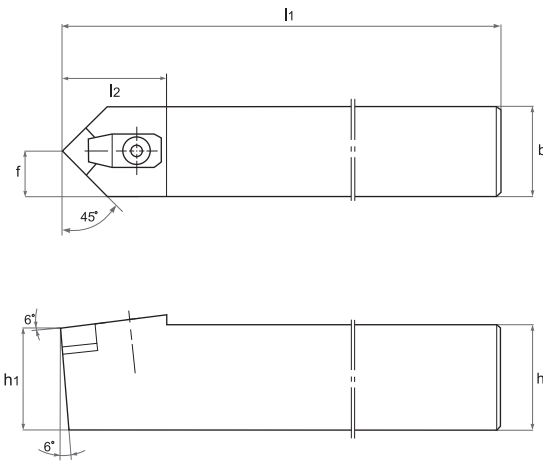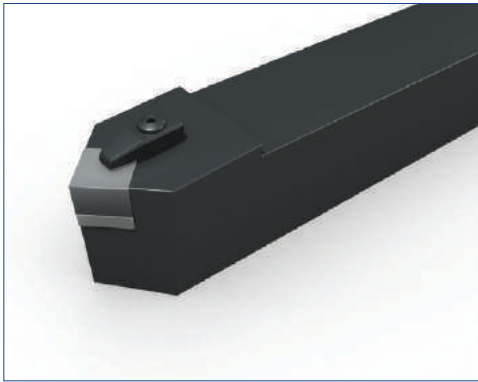



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSDNN 2525M12-A4	25	25	150	35	12.5	●		SNGN1204	UH1	SHSN4A	BM510	LW4
CSDNN 2525M12-A7	25	25	150	35	12.5	●		SNGN1207	UH1	SHSN4A	BM510	LW4
CSDNN 2525M12-X7	25	25	150	35	12.5			SNGX1207	UH5	SHSN4A	BM510	LW4
CSDNN 2525M15-A7	25	25	150	38	12.5			SNGN1507	UH1	SHSN5A	FM512	LW4
CSDNN 2525M15-X7	25	25	150	38	12.5			SNGX1507	UH5	SHSN5A	FM512	LW4
CSDNN 3225P12-A7	32	25	170	35	12.5	●		SNGN1207	UH1	SHSN4A	BM510	LW4
CSDNN 3225P12-X7	32	25	170	35	12.5			SNGX1207	UH5	SHSN4A	BM510	LW4
CSDNN 3225P15-A7	32	25	170	38	12.5	●		SNGN1507	UH1	SHSN5A	FM512	LW4
CSDNN 3225P15-X7	32	25	170	38	12.5			SNGX1507	UH5	SHSN5A	FM512	LW4
CSDNN 4040S19-A7	40	40	250	50	20	●		SNGN1907	UH4	SHSN6A	FM612	LW6
CSDNN 5050T25-A9	50	50	300	55	25	●		SNGN2509	UH4	SHSN8	FM815	LW6

Spare parts								
Clamp & Clamp Screw			Shim		Shim Screw		Wrench	
								
UH1	UH4	UH5	SHSN4A	SHSN5A	BM510	FM512S	FM615S	LW4
			SHSN6A	SHSN8		FM815S		LW6

SNGN	SNGX
	
Page 41	Page 42

EXTERNAL TOOLHOLDER

CSKN

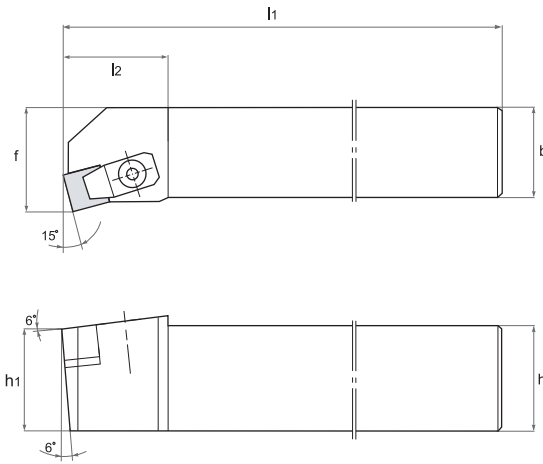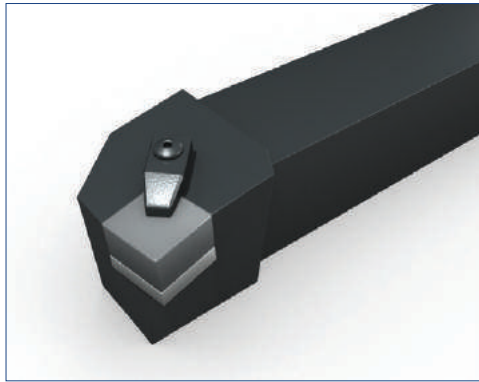



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSKNR/L 2525M12-A4	25	25	150	34	32			SNGN1204	UH1	SHSN4A	BM510	LW4
CSKNR/L 2525M12-A7	25	25	150	34	32	●	●	SNGN1207	UH1	SHSN4A	BM510	LW4
CSKNR/L 2525M12-X7	25	25	150	34	32	●	●	SNGX1207	UH5	SHSN4A	BM510	LW4
CSKNR/L 2525M15-A7	25	25	150	40	32			SNGN1507	UH1	SHSN5A	FM512S	LW4
CSKNR/L 2525M15-X7	25	25	150	40	32			SNGX1507	UH5	SHSN5A	FM512S	LW4
CSKNR/L 3225P12-A7	32	25	170	34	32			SNGN1207	UH1	SHSN4A	BM510	LW4
CSKNR/L 3225P12-X7	32	25	170	34	32		●	SNGX1207	UH5	SHSN4A	BM510	LW4
CSKNR/L 3225P15-A7	32	25	170	40	32	●	●	SNGN1507	UH1	SHSN5A	FM512S	LW4
CSKNR/L 3225P15-X7	32	25	170	40	32			SNGX1507	UH5	SHSN5A	FM512S	LW4

Spare parts						
Clamp & Clamp Screw		Shim		Shim Screw		Wrench
						
UH1	UH5	SHSN4A	SHSN5A	BM510	FM512S	LW4

SNGN	SNGX
	
Page 41	Page 42

EXTERNAL TOOLHOLDER

CSRN

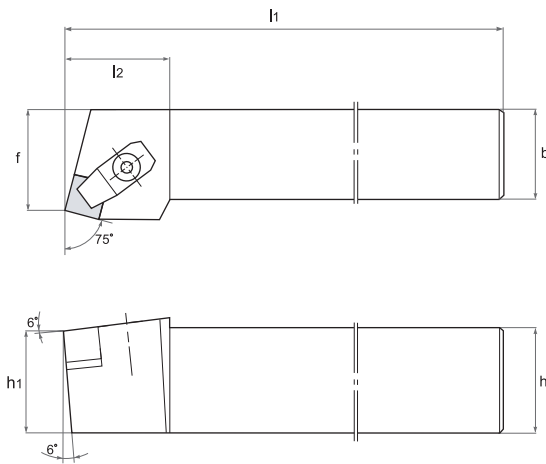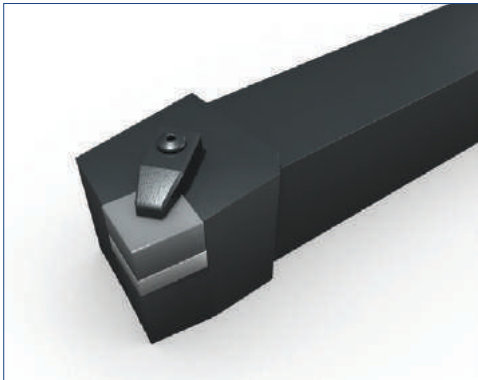



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSRNR/L 2525M12-A4	25	25	150	32	27	●	●	SNGN1204	UH1	SHSN4A	BM510	LW4
CSRNR/L 2525M12-A7	25	25	150	32	27	●	●	SNGN1207	UH1	SHSN4A	BM510	LW4
CSRNR/L 2525M12-X7	25	25	150	32	27	●		SNGX1207	UH5	SHSN4A	BM510	LW4
CSRNR/L 2525M15-A7	25	25	150	34	27			SNGN1507	UH1	SHSN5A	FM512	LW4
CSRNR/L 2525M15-X7	25	25	150	34	27			SNGX1507	UH5	SHSN5A	FM512	LW4
CSRNR/L 3225P12-A7	32	25	170	32	27			SNGN1207	UH1	SHSN4A	BM510	LW4
CSRNR/L 3225P12-X7	32	25	170	32	27			SNGX1207	UH5	SHSN4A	BM510	LW4
CSRNR/L 3225P15-A7	32	25	170	34	27	●	●	SNGN1507	UH1	SHSN5A	FM512	LW4
CSRNR/L 3225P15-X7	32	25	170	34	27	●		SNGX1507	UH5	SHSN5A	FM512	LW4
CSRNR/L 4040S19-A7	40	40	250	47	43			SNGN1907	UH4	SHSN6A	FM612	LW6
CSRNR/L 5050T25-A9	50	50	300	54	53			SNGN2509	UH4	SHSN8	FM815	LW6

Spare parts									
Clamp & Clamp Screw			Shim		Shim Screw		Wrench		
UH1	UH4	UH5	SHSN4A SHSN6A	SHSN5A SHSN8	BM510	FM512 FM815	FM612	LW4	LW6

SNGN	SNGX
Page 41	Page 42

EXTERNAL TOOLHOLDER

CSSN

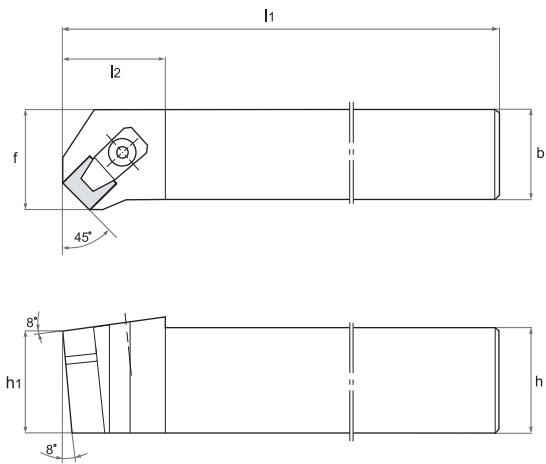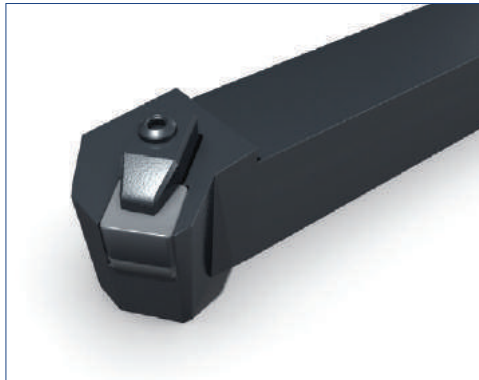



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSSNR/L 2525M12-A4	25	25	150	35	32			SNGN1204	UH1	SHSN4A	BM510	LW4
CSSNR/L 2525M12-A7	25	25	150	35	32	●	●	SNGN1207	UH1	SHSN4A	BM510	LW4
CSSNR/L 2525M12-X7	25	25	150	35	32		●	SNGX1207	UH5	SHSN4A	BM510	LW4
CSSNR/L 2525M15-A7	25	25	150	37	32	●		SNGN1507	UH1	SHSN5A	FM512S	LW4
CSSNR/L 2525M15-X7	25	25	150	37	32			SNGX1507	UH5	SHSN5A	FM512S	LW4
CSSNR/L 3225P12-A7	32	25	170	35	32	●		SNGN1207	UH1	SHSN4A	BM510	LW4
CSSNR/L 3225P12-X7	32	25	170	35	32			SNGX1207	UH5	SHSN4A	BM510	LW4
CSSNR/L 3225P15-A7	32	25	170	37	32			SNGN1507	UH1	SHSN5A	FM512S	LW4
CSSNR/L 3225P15-X7	32	25	170	37	32			SNGX1507	UH5	SHSN5A	FM512S	LW4

Spare parts					
Clamp & Clamp Screw		Shim		Shim Screw	
UH1	UH5	SHSN4A	SHSN5A	BM510	FM512S

SNGN	SNGX
Page 41	Page 42

EXTERNAL TOOLHOLDER

CSYN

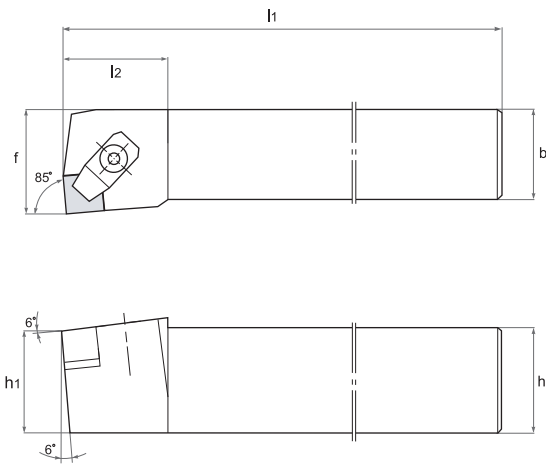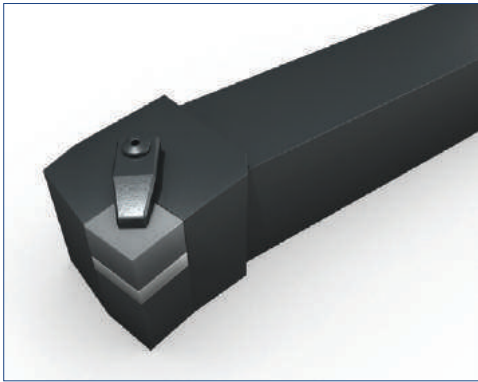



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSYNR/L 2525M12-A4	25	25	150	27	32			SNGN1204	UH1	SHSN4A	BM510	LW4
CSYNR/L 2525M12-A7	25	25	150	27	32			SNGN1207	UH1	SHSN4A	BM510	LW4
CSYNR/L 2525M12-X7	25	25	150	27	32			SNGX1207	UH5	SHSN4A	BM510	LW4
CSYNR/L 2525M15-A7	25	25	150	27	32			SNGN1507	UH1	SHSN5A	FM512S	LW4
CSYNR/L 2525M15-X7	25	25	150	27	32			SNGX1507	UH5	SHSN5A	FM512S	LW4
CSYNR/L 3225P12-A7	32	25	170	27	32			SNGN1207	UH1	SHSN4A	BM510	LW4
CSYNR/L 3225P12-X7	32	25	170	27	32			SNGX1207	UH5	SHSN4A	BM510	LW4
CSYNR/L 3225P15-A7	32	25	170	27	32			SNGN1507	UH1	SHSN5A	FM512S	LW4
CSYNR/L 3225P15-X7	32	25	170	27	32			SNGX1507	UH5	SHSN5A	FM512S	LW4

Spare parts						
Clamp & Clamp Screw		Shim		Shim Screw		Wrench
						
UH1	UH5	SHSN4A	SHSN5A	BM510	FM512	LW4

SNGN	SNGX
Page 41	Page 42

EXTERNAL TOOLHOLDER

CTFN

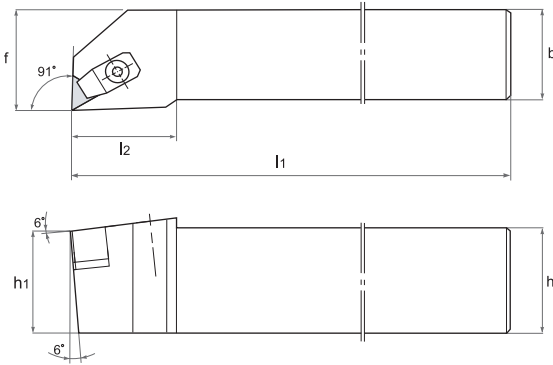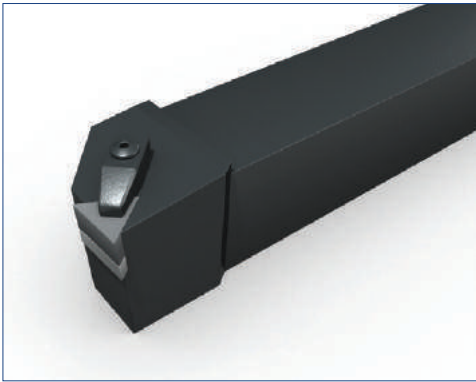



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CTFNR/L 2525M16-A4	25	25	150	29	32			TNGN1604	UH1	SHTN3A	BM408	LW4
CTFNR/L 2525M16-A7	25	25	150	29	32			TNGN1607	UH1	SHTN3A	BM408	LW4
CTFNR/L 2525M22-A4	25	25	150	32	32			TNGN2204	UH1	SHTN4A	FM410	LW4
CTFNR/L 2525M22-A7	25	25	150	32	32			TNGN2207	UH1	SHTN4A	FM410	LW4
CTFNR/L 3225P16-A4	32	25	170	29	32			TNGN1604	UH1	SHTN3A	BM408	LW4
CTFNR/L 3225P16-A7	32	25	170	29	32			TNGN1607	UH1	SHTN3A	BM408	LW4
CTFNR/L 3225P22-A4	32	25	170	32	32			TNGN2204	UH1	SHTN4A	FM410	LW4
CTFNR/L 3225P22-A7	32	25	170	32	32			TNGN2207	UH1	SHTN4A	FM410	LW4

Spare parts					
Clamp & Clamp Screw	Shim		Shim Screw		Wrench
UH1	SHTN3A	SHTN4A	BM408	FM410	LW4

TNGN
Page 46

EXTERNAL TOOLHOLDER


CTGN

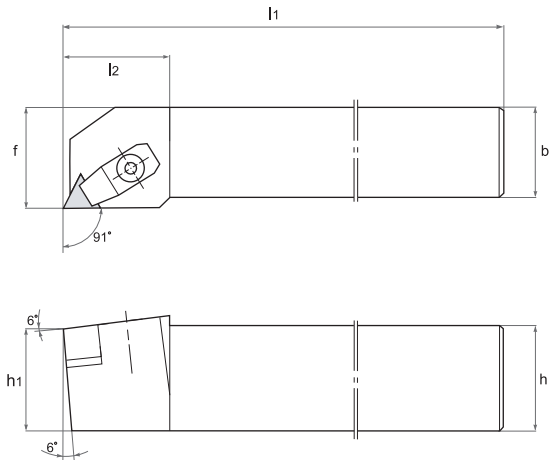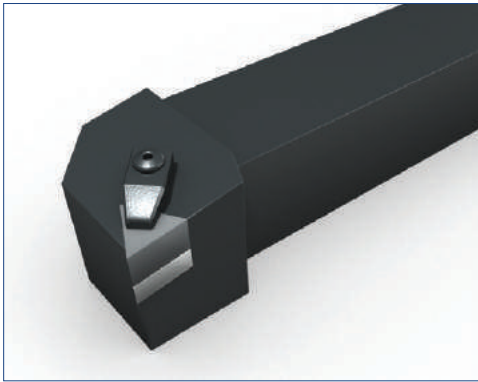

Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CTGNR/L 2525M16-A4	25	25	150	26	32	●	●	TNGN1604	UH1	SHTN3A	BM408	LW4
CTGNR/L 2525M16-A7	25	25	150	26	32		●	TNGN1607	UH1	SHTN3A	BM408	LW4
CTGNR/L 2525M22-A4	25	25	150	32	32	●		TNGN2204	UH1	SHTN4A	FM410	LW4
CTGNR/L 2525M22-A7	25	25	150	32	32			TNGN2207	UH1	SHTN4A	FM410	LW4
CTGNR/L 3225P16-A4	32	25	170	26	32	●	●	TNGN1604	UH1	SHTN3A	BM408	LW4
CTGNR/L 3225P16-A7	32	25	170	26	32			TNGN1607	UH1	SHTN3A	BM408	LW4
CTGNR/L 3225P22-A4	32	25	170	32	32			TNGN2204	UH1	SHTN4A	FM410	LW4
CTGNR/L 3225P22-A7	32	25	170	32	32			TNGN2207	UH1	SHTN4A	FM410	LW4

Spare parts					
Clamp & Clamp Screw	Shim		Shim Screw		Wrench
					
UH1	SHTN3A	SHTN4A	BM408	FM410	LW4



TNGN



Page 46

EXTERNAL TOOLHOLDER

CWLN

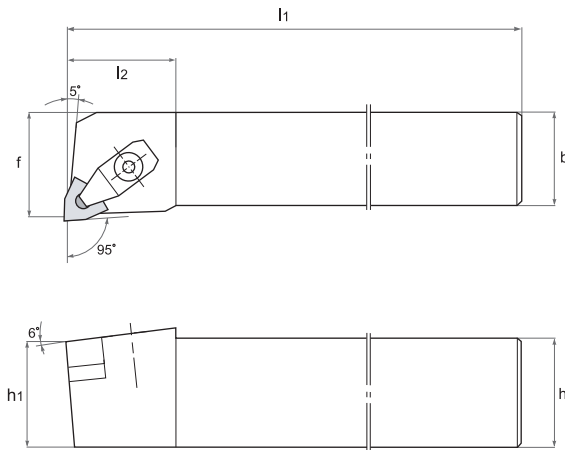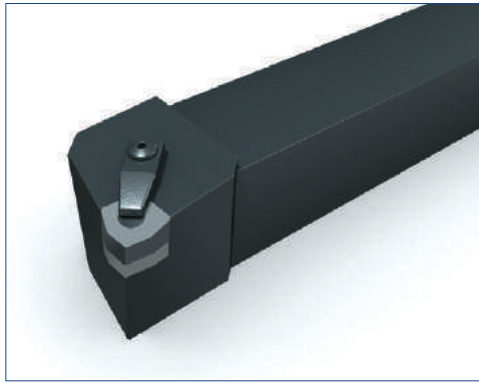

Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CWLNR/L 2525M08-X7	25	25	150	28	32	●	●	WNGX0807	UH5	SHWN4A	TM4010	LW4
CWLNR/L 3225M08-X7	32	25	150	28	32	●	●	WNGX0807	UH5	SHWN4A	TM4010	LW4

Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
			
UH5	SHWN4A	TM4010	LW4



WNGX



Page 51

EXTERNAL TOOLHOLDER

CSRC

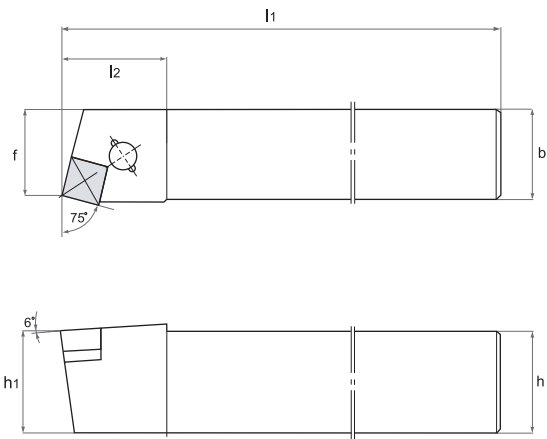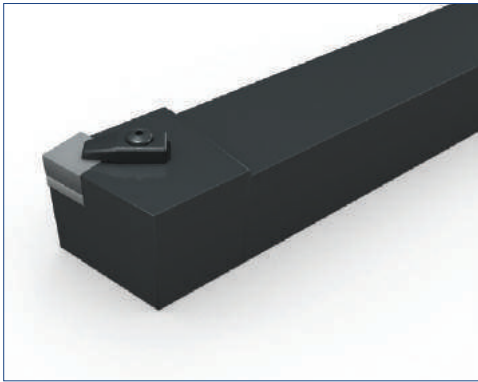



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSRCR/L 2525M12-A4	25	25	150	32	27	●		SCGN1204	UH1	SHSC4A	SP3	LW4
CSRCR/L 3225P12-A4	32	25	170	32	27			SCGN1204	UH1	SHSC4A	SP3	LW4

Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
			
UH1	SHSC4A	SP3	LW4



EXTERNAL TOOLHOLDER

CSSC

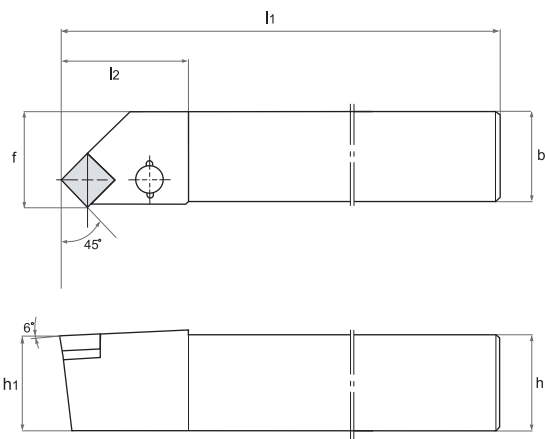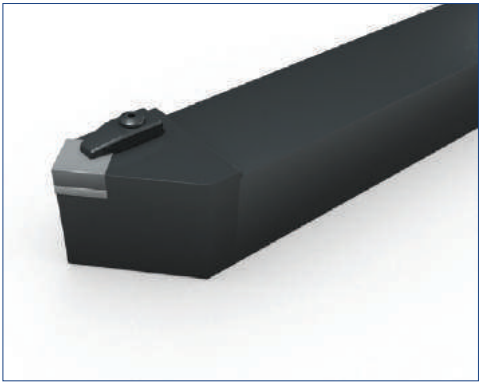



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSSCR/L 2525M12-A4	25	25	150	35	32	●		SCGN1204	UH1	SHSC4A	SP3	LW4
CSSCR/L 3225P12-A4	32	25	170	35	32			SCGN1204	UH1	SHSC4A	SP3	LW4

Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
			
UH1	SHSC4A	SP3	LW4




EXTERNAL TOOLHOLDER


CSTP

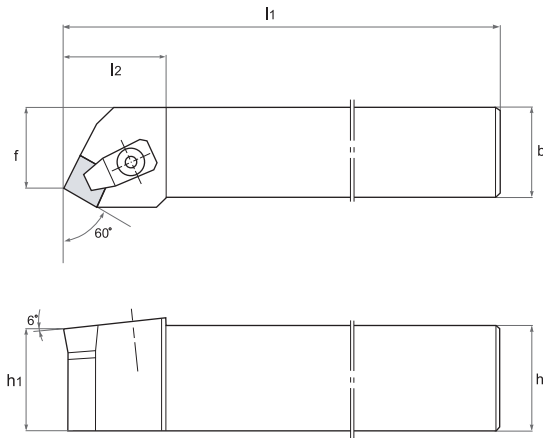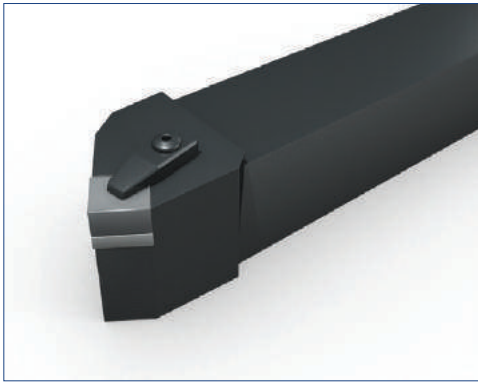

Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSTPR/L 2020K09-A3	20	20	125	24	17			SPGN0903	UH1	SHSC3A	SP3	LW4
CSTPR/L 2020K12-A3	20	20	125	30	17			SPGN1203	UH1	SHSC4A	SP3	LW4
CSTPR/L 2020K12-A4	20	20	125	30	17			SPGN1204	UH1	SHSC4A	SP3	LW4
CSTPR/L 2525M12-A3	25	25	150	30	22			SPGN1203	UH1	SHSC4A	SP3	LW4
CSTPR/L 2525M12-A4	25	25	150	30	22			SPGN1204	UH1	SHSC4A	SP3	LW4

Spare parts			
Clamp & Clamp Screw	Shim		Wrench
			
UH1	SHSC3A	SHSC4A	LW4



SPGN




Page 44

EXTERNAL TOOLHOLDER


CTFP

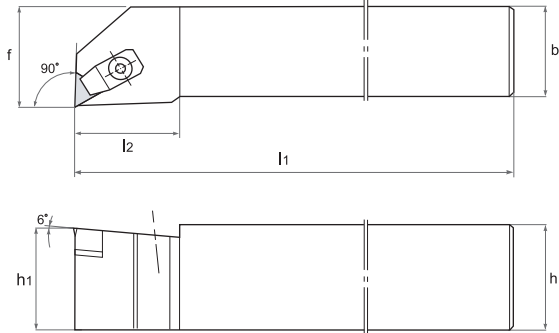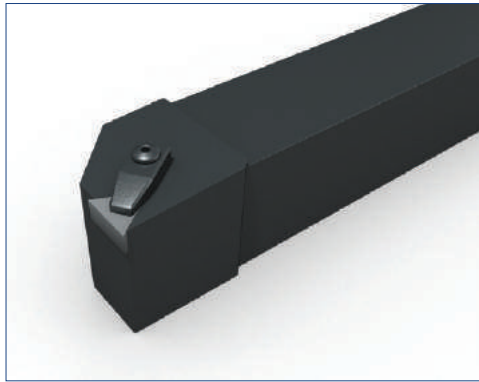

Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CTFPR/L 2020K16-A3	20	20	125	20	25			TPGN1603	UH1	SHTC3A	SP3	LW4
CTFPR/L 2525M16-A3	25	25	150	20	32			TPGN1603	UH1	SHTC3A	SP3	LW4

Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
			
UH1	SHTC3A	SP3	LW3 LW4



TPGN



Page 48

EXTERNAL TOOLHOLDER

HRCD

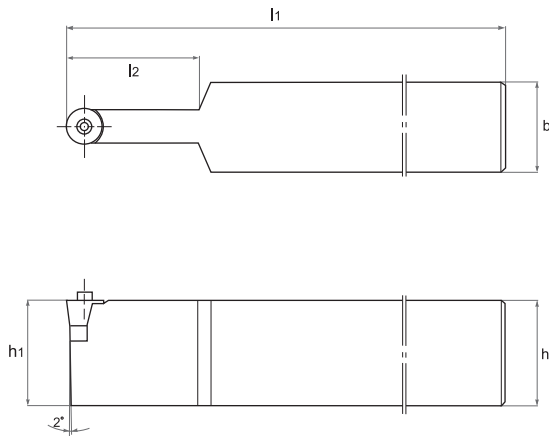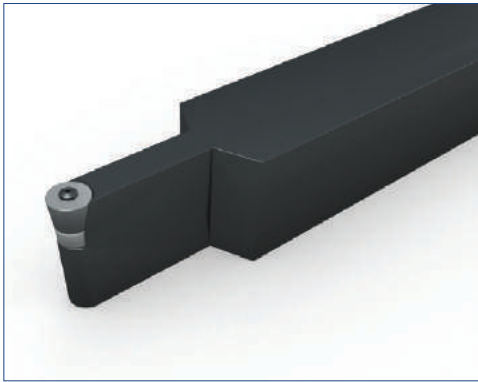

Type	Dimensions (mm)				Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
HRCD 2525M12-B6	25	25	150	15	●		CDH1206	HB 2	SHCD22		LW2.5
HRCD 2525M19-B9	25	25	150	15	●		CDH1909	HB 3	SHCD33		LW5
HRCD 3225R19-B9	32	25	200	38	●		CDH1909	HB 3	SHCD33		LW5
HRCD 4035S19-B9	40	35	250	45	●		CDH1909	HB 3	SHCD33		LW5
HRCD 4035S32-B19	40	35	250	45			CDH3219	HB 5	SHCD53		LW6
HRCD 5050T32-B19	50	50	300	50			CDH3219	HB 5	SHCD53		LW6



Spare parts									
Clamp & Clamp Screw			Shim			Wrench			
HB2	HB3	HB5	SHCD22	SHCD33	SHCD53	LW2.5	LW5	LW6	

CDH

Page 52

EXTERNAL TOOLHOLDER

CVJN

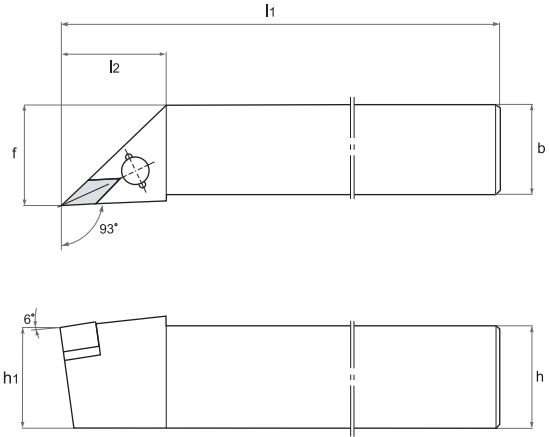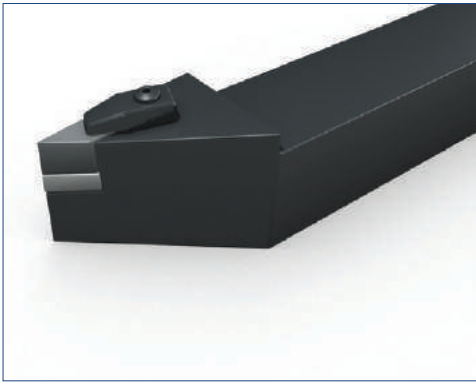

Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CVJNR/L 2525M16-A4	25	25	150	41	32	●	●	VNGN1604	UH24S	SHVN3A	TM412	LW4
CVJNR/L 2525M16-X7	25	25	150	41	32	●	●	VNGX1607	UH24S	SHVN3A	TM412	LW4
CVJNR/L 3225P16-X7	32	25	170	41	32	●		VNGX1607	UH24S	SHVN3A	TM412	LW4

Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
UH24, UH24S	SHVN3A	TM412	LW4

VNGN



Page 49

VNGX

Page 50

EXTERNAL TOOLHOLDER

CVVN

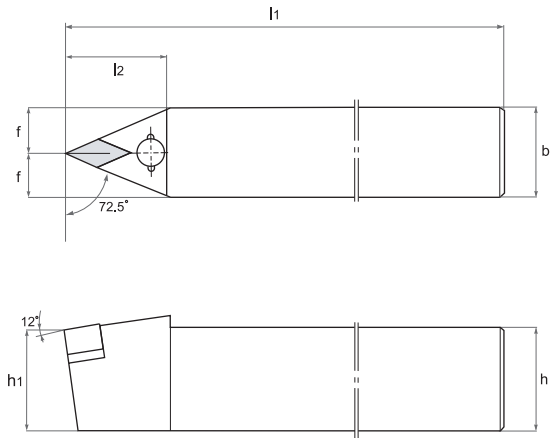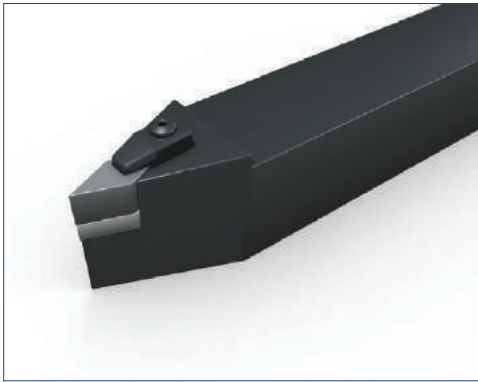



Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CVVNN 2525M16-A4	25	25	150	45	12.5			VNGN1604	UH24S	SHVN3A	TM412	LW4
CVVNN 2525M16-X7	25	25	150	45	12.5			VNGX1607	UH24	SHVN3A	TM412	LW4
CVVNN 3225P16-X7	32	25	170	45	12.5			VNGX1607	UH24	SHVN3A	TM412	LW4

Spare parts				
Clamp & Clamp Screw		Shim	Shim Screw	Wrench
				
UH24	UH24S	SHVN3A	TM412	LW4

VNGN	VNGX
Page 49	Page 50

EXTERNAL TOOLHOLDER

CSBF

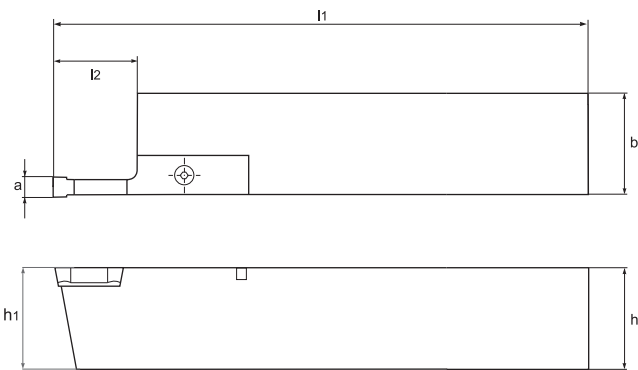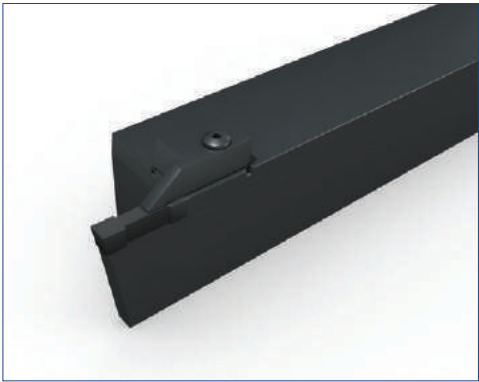


Type	Dimensions (mm)					Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSBF 5040P3228R/L	3.18	50	40	170	19			SGD3/LH	SH510	SH510		LW3
CSBF 5040P4828R/L	4.78	50	40	170	19			SGD4/LH	SH510	SH510		LW4
CSBF 5040P5528R/L	5.54	50	40	170	19			SGD4/LH	SH510	SH510		LW4
CSBF 5040P6428R/L	6.35	50	40	170	19			SHD6/LHS	SH510	SH510		LW4
CSBF 5040P7928R/L	7.93	50	40	170	19			GD6/LH	SH510	SH510		LW4
CSBF 5040P9528R/L	9.52	50	40	170	19			SGD9/LH	SH510	SH510		LW5

Spare parts								
Clamp & Clamp Screw					Wrench			
								
SGD3 / LH	SGD4 / LH	SGD6 / LH	SGD9 / LH	SH520		LW3	LW4	LW5

SYBF
Page 58

EXTERNAL TOOLHOLDER

CSBR

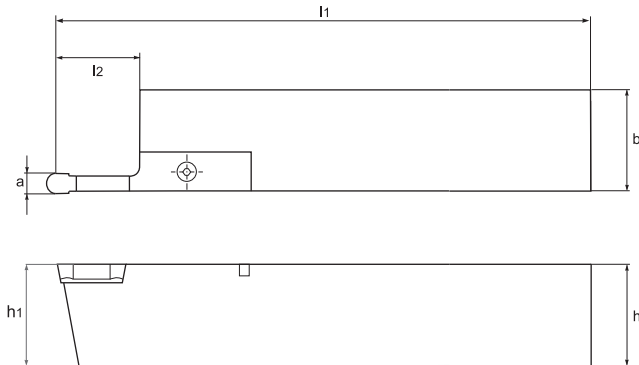

Type	Dimensions (mm)					Stock		Insert	Spare Parts	
	a	h(h ₁)	b	l ₁	l ₂	R	L		Clamp & Clamp Screw	Wrench
CSBR 5040P3228R/L	3.18	50	40	170	19			SYBR3228	SGD3 / LH SH520	LW3
CSBR 5040P4828R/L	4.78	50	40	170	19			SYBR4828	SGD4 / LH SH520	LW4
CSBR 5040P5528R/L	5.54	50	40	170	19			SYBR5528	SGD4 / LH SH520	LW4
CSBR 5040P6428R/L	6.35	50	40	170	19			SYBR6428	SGD6 / LH SH520	LW4
CSBR 5040P7928R/L	7.93	50	40	170	19			SYBR7928	SGD6 / LH SH520	LW4
CSBR 5040P9528R/L	9.52	50	40	170	19			SYBR9528	SGD9 / LH SH520	LW5



Spare parts									
Clamp & Clamp Screw					Wrench				
SGD3 / LH	SGD4 / LH	SGD6 / LH	SGD9 / LH		SH520	LW3	LW4	LW5	

SYBR

Page 58

EXTERNAL TOOLHOLDER

CSGF

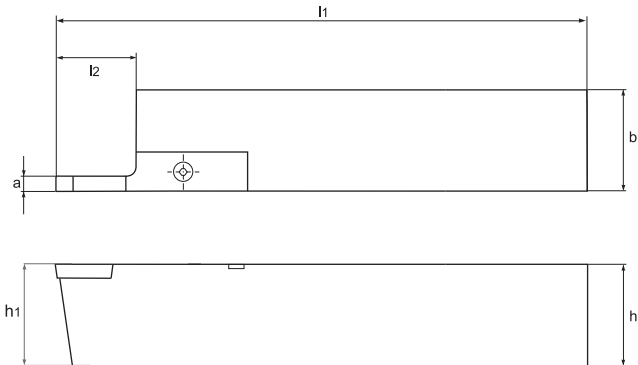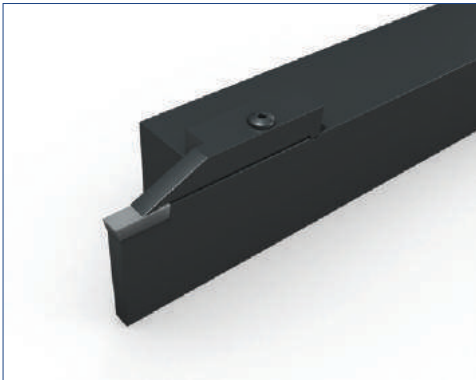

Type	Dimensions (mm)					Stock		Insert	Spare Parts	
	a	h(h ₁)	b	l ₁	l ₂	R	L		Clamp & Clamp Screw	Wrench
CSGF 3225P4012R/L	4.0	32	25	170	19	●		SGF4012	SGL4 / LH SH520	LW3
CSGF 3225P5012R/L	5.0	32	25	170	19	●		SGF5012	SGL5 / LH SH520	LW4
CSGF 3225P6015R/L	6.0	32	25	170	19	●	●	SGF6015	SGL5 / LH SH520	LW4
CSGF 3225P7015R/L	7.0	32	25	170	19	●		SGF7015	SGL7 / LH SH520	LW5
CSGF 3225P8015R/L	8.0	32	25	170	19	●	●	SGF8015	SGL8 / LH SH520	LW5
CSGF 3225P1015R/L	10.0	32	25	170	19			SGF1015	SGL8 / LH SH520	LW5



Spare parts									
Clamp & Clamp Screw					Wrench				
SGL4 / LH	SGL5 / LH	SGL7 / LH	SGL8 / LH		SH520	LW3	LW4	LW5	

SGF

Page 59

EXTERNAL TOOLHOLDER

CSGR

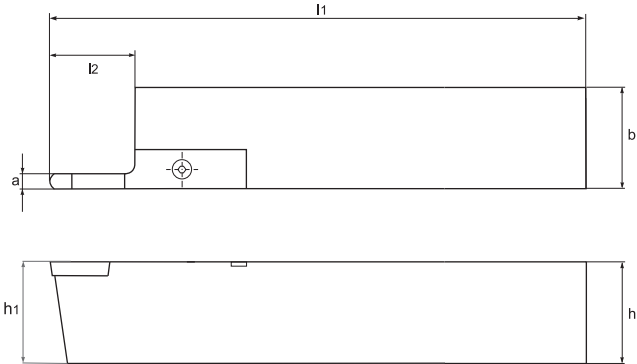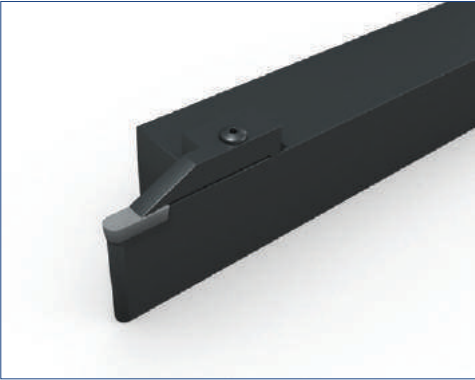



Type	Dimensions (mm)					Stock		Insert	Spare Parts		
	a	h(h ₁)	b	l ₁	l ₂	R	L		Clamp & Clamp Screw		Wrench
CSGR 3225P4012R/L	4.0	32	25	170	19		●	SGR4012	SGL4 / LH	SH520	LW3
CSGR 3225P5012R/L	5.0	32	25	170	19	●		SGR5012	SGL5 / LH	SH520	LW4
CSGR 3225P6015R/L	6.0	32	25	170	19			SGR6015	SGL5 / LH	SH520	LW4
CSGR 3225P7015R/L	7.0	32	25	170	19			SGR7015	SGL7 / LH	SH520	LW5
CSGR 3225P8015R/L	8.0	32	25	170	19			SGR8015	SGL8 / LH	SH520	LW5
CSGR 3225P1015R/L	10.0	32	25	170	19			SGR1015	SGL8 / LH	SH520	LW5

Spare parts						
Clamp & Clamp Screw					Wrench	
						
SGL4 / LH	SGL5 / LH	SGL7 / LH	SGL8 / LH	SH520	LW3	LW4 LW5



EXTERNAL TOOLHOLDER

CSSF

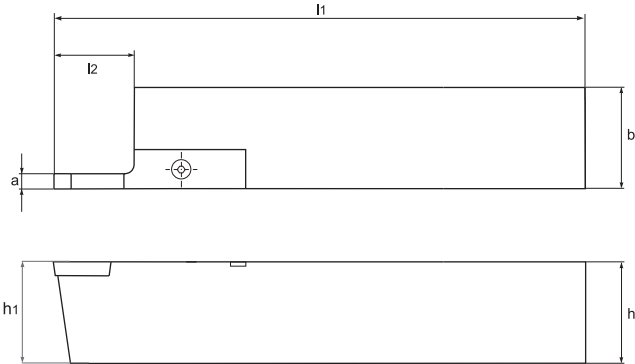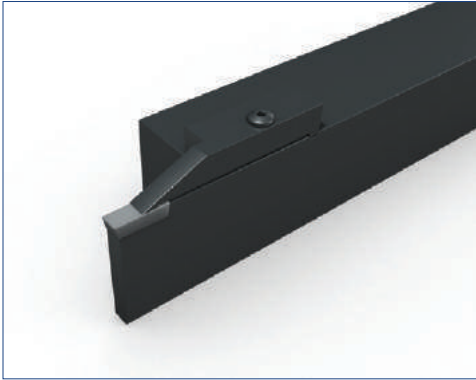



Type	Dimensions (mm)					Stock		Insert	Spare Parts		
	a	h(h ₁)	b	l ₁	l ₂	R	L		Clamp & Clamp Screw		Wrench
CSSF 3225P4012R/L	4.0	32	25	170	19	●	●	SSF4012	SGL4 / LH	SH520	LW3
CSSF 3225P5012R/L	5.0	32	25	170	19	●		SSF5012	SGL5 / LH	SH520	LW4
CSSF 3225P6015R/L	6.0	32	25	170	19	●		SSF6015	SGL5 / LH	SH520	LW4
CSSF 3225P7015R/L	7.0	32	25	170	19			SSF7015	SGL7 / LH	SH520	LW5
CSSF 3225P8015R/L	8.0	32	25	170	19			SSF8015	SGL8 / LH	SH520	LW5
CSSF 3225P1015R/L	10.0	32	25	170	19			SSF1015	SGL8 / LH	SH520	LW5

Spare parts						
Clamp & Clamp Screw					Wrench	
						
SGL4 / LH	SGL5 / LH	SGL7 / LH	SGL8 / LH	SH520	LW3	LW4 LW5




EXTERNAL TOOLHOLDER

CSSR

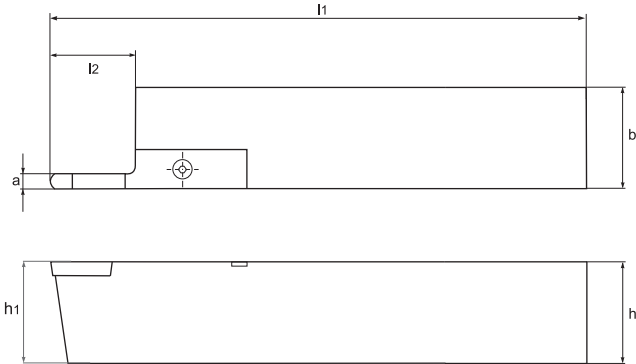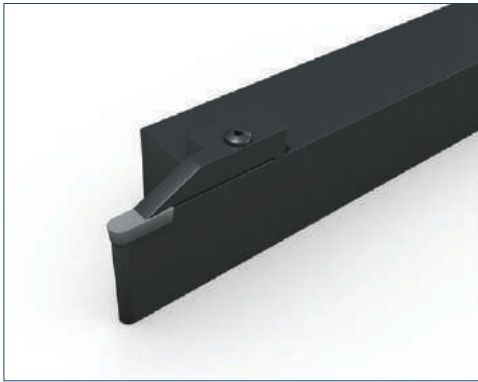



Type	Dimensions (mm)					Stock		Insert	Spare Parts		
	a	h(h ₁)	b	l ₁	l ₂				Clamp & Clamp Screw		Wrench
CSSR 3225P4012R/L	4.0	32	25	170	19			SSR4012	SGL4 / LH	SH520	LW3
CSSR 3225P5012R/L	5.0	32	25	170	19			SSR5012	SGL5 / LH	SH520	LW4
CSSR 3225P6015R/L	6.0	32	25	170	19			SSR6015	SGL5 / LH	SH520	LW4
CSSR 3225P7015R/L	7.0	32	25	170	19			SSR7015	SGL7 / LH	SH520	LW5
CSSR 3225P8015R/L	8.0	32	25	170	19			SSR8015	SGL8 / LH	SH520	LW5
CSSR 3225P1015R/L	10.0	32	25	170	19			SSR1015	SGL8 / LH	SH520	LW5

Spare parts							
Clamp & Clamp Screw				Wrench			
							
SGL4 / LH	SGL5 / LH	SGL7 / LH	SGL8 / LH	SH520	LW3	LW4	LW5




EXTERNAL TOOLHOLDER

CSSR .. N

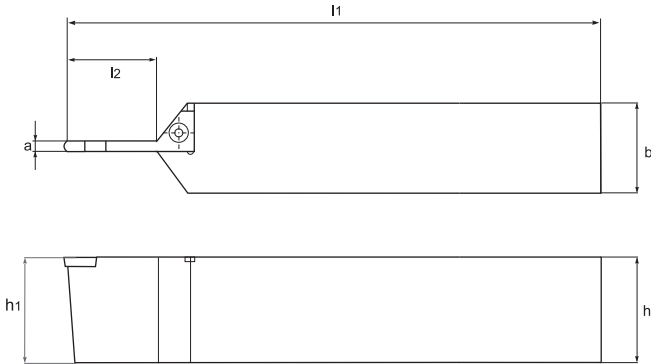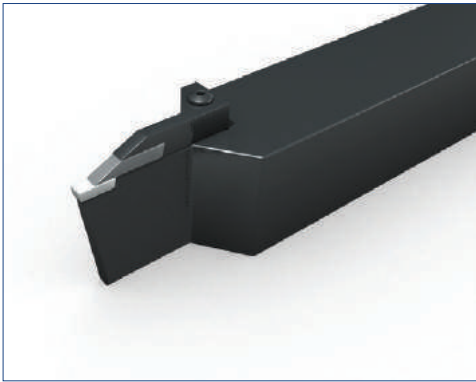



Type	Dimensions (mm)					Stock		Insert	Spare Parts		
	a	h(h ₁)	b	l ₁	l ₂				Clamp & Clamp Screw		Wrench
CSSR 4040R4012.N5	4.0	40	40	200	5			SSR4012	GRW4012	SH520	LW3
CSSR 5040P4012.N19	4.0	50	40	170	19			SSR4012	GRW4012	SH520	LW3

Spare parts		
Clamp & Clamp Screw		Wrench
		
GRW4012		LW4




EXTERNAL TOOLHOLDER

CWF/R

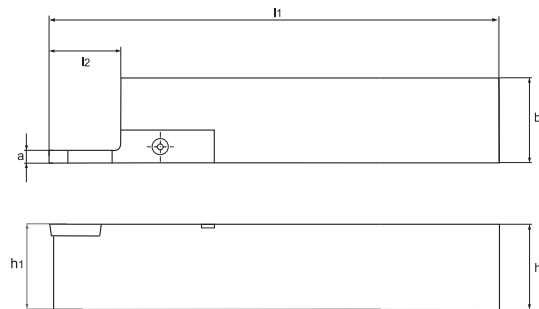
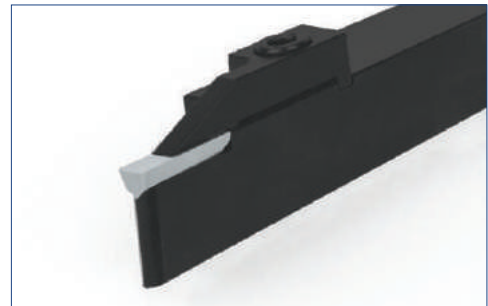


Type	Dimensions (mm)					Stock		Insert	Spare Parts	
	a	h(h ₁)	b	l ₁	l ₂	R	L		Clamp & Clamp Screw	Wrench
CWF/R 2525M094050R/L	2.3	25	25	150	19			WFP094050 WRP094050 WFC094050 WRC094050	WGL2.3 R/L & WCB6	WCS6 LW5
CWF/R 2525M125050R/L	3.1	25	25	150	19	●	●	WFP125050 WRP125050 WFC125050 WRC125050	WGL3.1 R/L & WCB6	WCS6 LW5
CWF/R 2525M156050R/L	3.9	25	25	150	19	●	●	WFP156050 WRP156050 WFC156050 WRC156050	WGL3.9 R/L & WCB6	WCS6 LW5
CWF/R 2525M187050R/L	4.7	25	25	150	19	●	●	WFP187050 WRP187050 WFC187050 WRC187050	WGL4.7 R/L & WCB6	WCS6 LW5
CWF/R 2525M218075R/L	5.5	25	25	150	29	●		WFP218075 WRP218075 WFC218075 WRC218075	WGL5.5 R/L & WCB6	WCS6 LW5
CWF/R 2525M250075R/L	6.3	25	25	150	29	●	●	WFP250075 WRP250075 WFC250075 WRC250075	WGL6.3 R/L & WCB6	WCS6 LW5
CWF/R 2525M281075R/L	7.1	25	25	150	29			WFP281075 WRP281075 WFC281075 WRC281075	WGL7.1 R/L & WCB6	WCS6 LW5
CWF/R 2525M312100R/L	7.9	25	25	150	38			WFP312100 WRP312100 WFC312100 WRC312100	WGL7.9 R/L & WCB6	WCS6 LW5
CWF/R 2525M344100R/L	8.7	25	25	150	38			WFP344100 WRP344100 WFC344100 WRC344100	WGL8.7 R/L & WCB6	WCS6 LW5
CWF/R 2525M375100R/L	9.5	25	25	150	38			WFP375100 WRP375100 WFC375100 WRC375100	WGL9.5 R/L & WCB6	WCS6 LW5



Spare parts			
Clamp & Clamp Screw	Spring	Wrench	
			
WGL2.3 R/L~WGL9.5 R/L	WCB6	WCS6 LW5	

SPECIAL TOOLHOLDER

CLKN

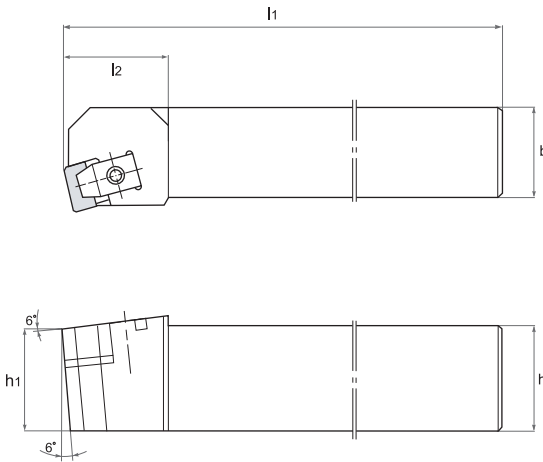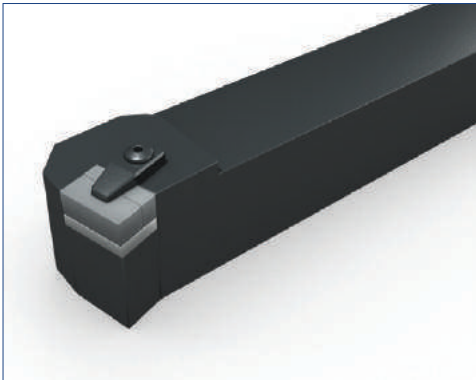

Type	Dimensions (mm)				Stock		Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	R	L		Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CLKNR/L 6060V65-A	60	60	400	70			LNJ6588	SM14	SHLJ5	BM510	LW6
CLKNR/L 6060V66-A	60	60	400	70			LNJ6688	SM14	SHLJ5	BM510	LW6

Spare parts			
Clamp & Clamp Screw	Shim	Shim Screw	Wrench
			
SM14	SHLJ5 SHLJ6	BM510	LW6



LNJ



Page 55

SPECIAL TOOLHOLDER

CFLN

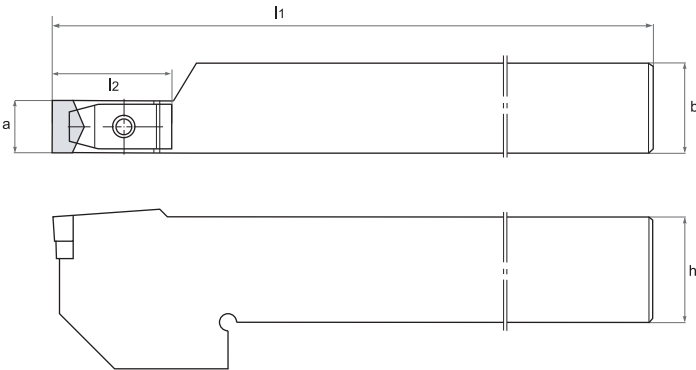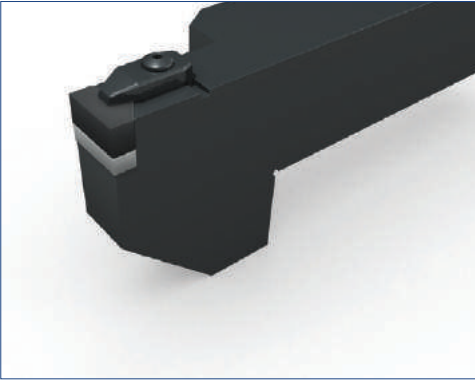



Type	Dimensions (mm)					Stock	Insert	Spare Parts			
	a	h(h ₁)	b	l ₁	l ₂			Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CFLNN 6060U44-A	14	60	60	350	80		F10537	SM14	SHF10	BM510	LW6
CFLNN 5050T32-A	12	50	50	300	75		F13941	SM14	SHF13	BM510	LW6
CFLNN 4040R25-A	7	40	40	200	40		F250723	SM14	SHF25	BM510	LW4

Spare parts					
Clamp & Clamp Screw		Shim			Wrench
SM14		SHF10	SHF13	SHF25	LW8

F-Series	F-Series
Page 53	Page 54

SPECIAL TOOLHOLDER

CSVN

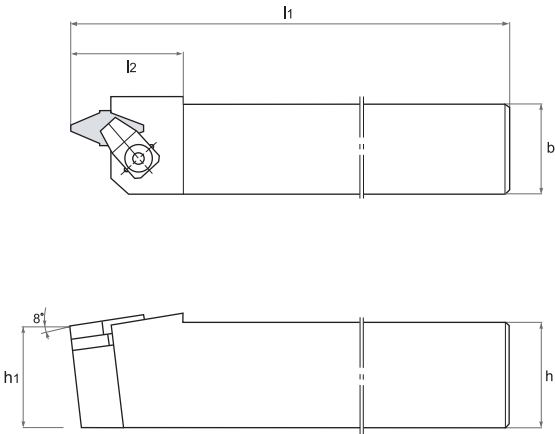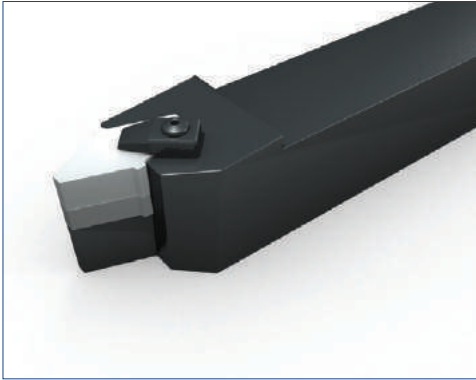



Type	Dimensions (mm)				Stock	Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂			Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CSVNN 3232P38-A7-26	32	32	170	38		SVW38260	UH1	SHSV3826	FM510	LW4
CSVNN 3232P38-A7-32	32	32	170	40		SVW38320	UH1	SHSV3832	FM510	LW4
CSVNN 3232P34-A7-40	32	32	170	50		SVW34400	UH1	SHSV3440	FM510	LW4

Spare parts				
Clamp & Clamp Screw	Shim		Shim Screw	Wrench
UH1	SHSV3826	SHSV3832	SHSV3440	LW4


SVW
Page 78

SPECIAL TOOLHOLDER

CGVN

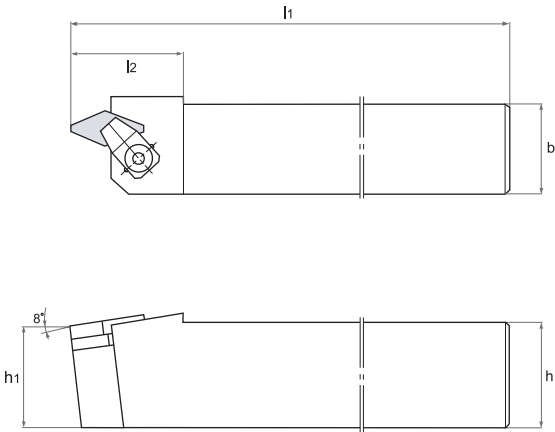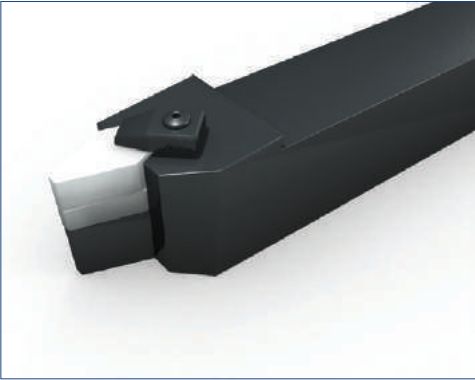

Type	Dimensions (mm)				Stock	Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂			Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CGVNN 3232P38-A7-32	32	32	170	48		GVGN38320	UH1	SHGV3832	TM510	LW4
CGVNN 3232P38-A7-33	32	32	170	46		GVGN38335	UH1	SHGV3833	TM510	LW4
CGVNN 3232P36-A7-34	32	32	170	49		GVGN36340	UH1	SHGV3634	TM510	LW4
CGVNN 3232P38-A7-36	32	32	170	44		GVGN38360	UH1	SHGV3836	TM510	LW4
CGVNN 3232P34-A7-36	32	32	170	44		GVGN34360	UH1	SHGV3436	TM510	LW4

Spare parts				
Clamp & Clamp Screw	Shim		Shim Screw	Wrench
				
UH1	SHGV3832 SHGV3836	SHGV3833 SHGV3436	SHGV3634	TM510 LW4



GVGN



Page 78

SPECIAL TOOLHOLDER

CINN

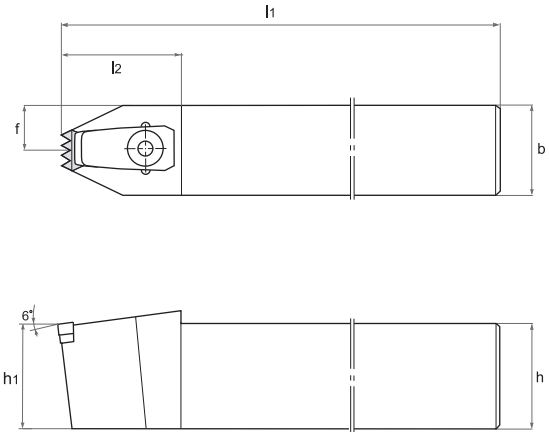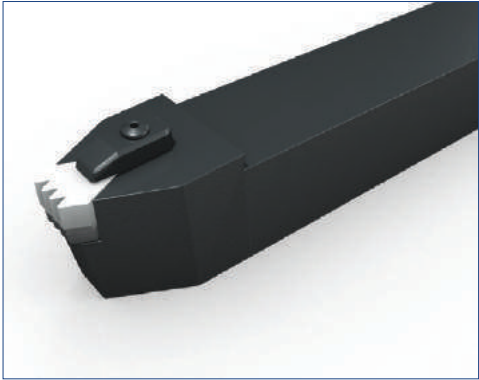

Type	Dimensions (mm)					Stock	Insert	Spare Parts			
	h(h ₁)	b	l ₁	l ₂	f			Clamp & Clamp Screw	Shim	Shim Screw	Wrench
CINNN 2525M09-A4-F3	25	25	150	30	12.5		INGN160435F3	UH1	SHIN33F3	TM3008	LW4
CINNN 2525M12-A4-F4	25	25	150	34	12.5		INGN220435F4	UH1	SHIN43F4	TM4010	LW4
CINNN 3225P09-A4-F3	32	25	170	30	12.5		INGN160435F3	UH1	SHIN33F3	TM3008	LW4
CINNN 3225P12-A4-F4	32	25	170	34	12.5		INGN220435F4	UH1	SHIN43F4	TM4010	LW4

Spare parts				
Clamp & Clamp Screw	Shim		Shim Screw	Wrench
				
UH1	SHIN33F3	SHIN43F4	TM3008 TM4010	LW4

INGN



Page 80


INGN




Page 103

ROLL TOOLING SOLUTION

PLATE MILL ROLL

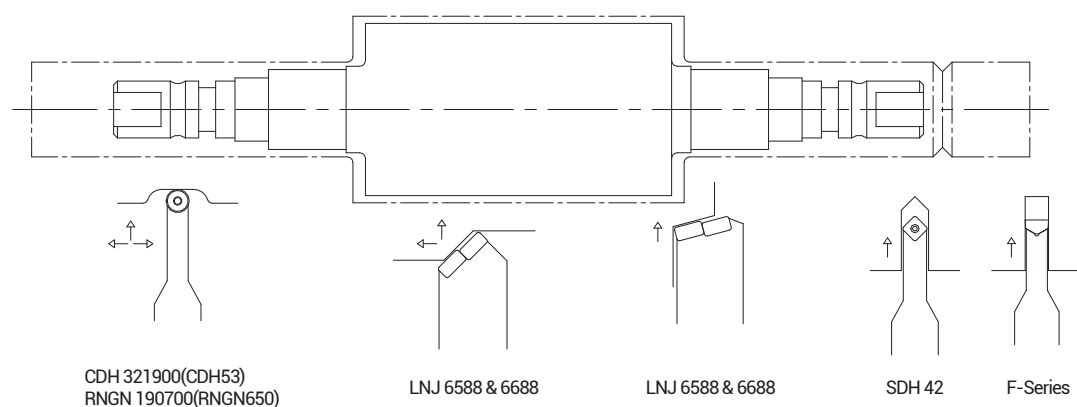


SECTION MILL

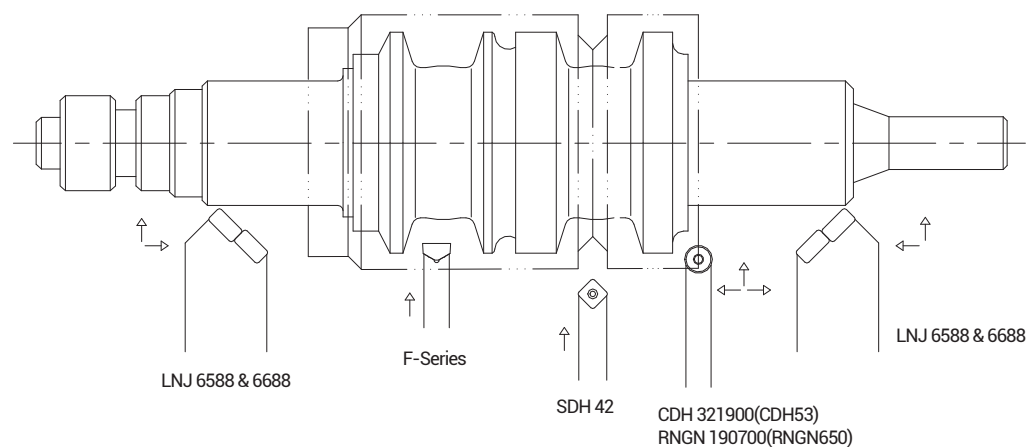


ROLL TOOLING SOLUTION / SPECIAL TYPE


CARTRIDGE TYPE(INSERT : CDH 321900)

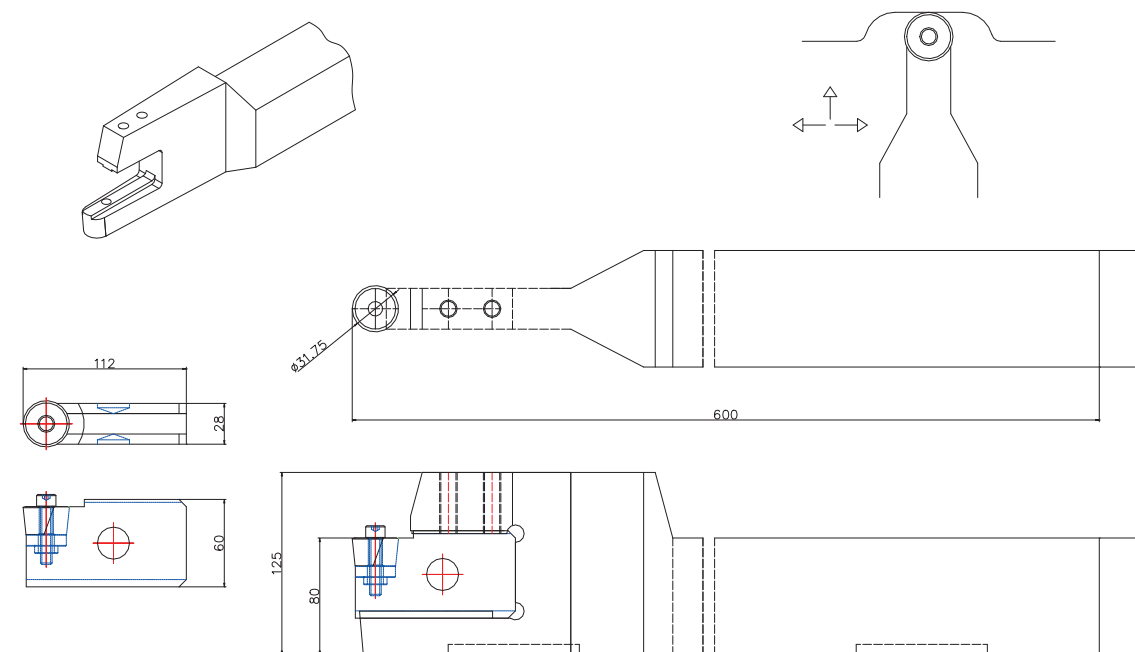


Heavy Duty Roll Cutting Tool / HEINLEIL

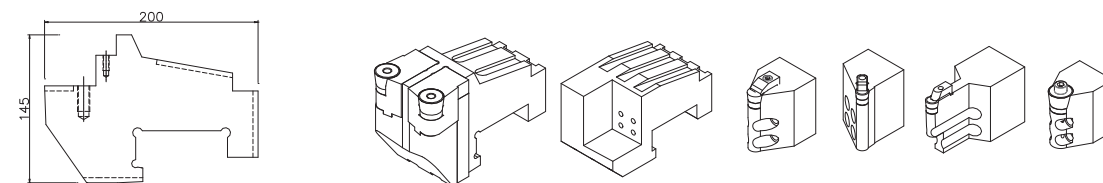


Heavy Duty Roll Cutting Tool / WALDRICH SIEGEN

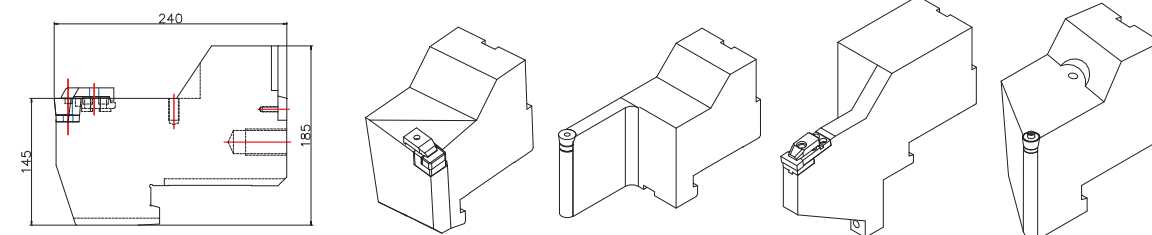

Heavy Duty Roll Cutting Tool / RAVENSBURG

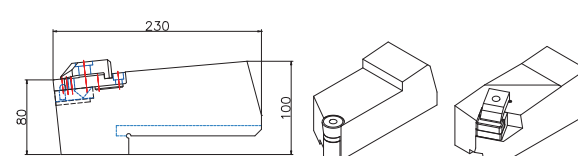

CBN INSERT TOOL & HOLDER

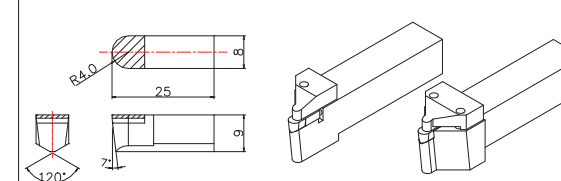

MILLING CUTTER



Application Index A 190

Face Milling Cutter A 192

Ball Endmill A 230

Chamfer Cutter A 232

Aluminum Cutter A 235

Special Tools A 244

APPLICATION INDEX

SFKN .. 88



PAGE 192

SFKN .. 75



PAGE 194

SFKN .. 45



PAGE 196

SFCP .. 00 .. R



PAGE 222

SFXN



PAGE 224

SFXP



PAGE 226

SFKP .. 88



PAGE 198

SFKP .. 75



PAGE 200

SFKP .. 45



PAGE 202

SFKN .. 90



PAGE 228

SMCD .. 90



PAGE 229

SECP



PAGE 230

SFAN .. 88



PAGE 204

SFAN .. 75



PAGE 206

SFSX .. 00 .. EC



PAGE 208

SEXP



PAGE 232

CSC



PAGE 234

HPA-I



PAGE 237

SFSX .. 70 .. EC



PAGE 210

SFSP .. OT



PAGE 212

SFKN .. HX



PAGE 214

HPA-H



PAGE 238

HPA-M



PAGE 239

ARBOR



PAGE 240

SFKP .. MF



PAGE 216

SFMS .. LRF



PAGE 218

SFCN .. 00 .. R



PAGE 220

QCB-I



PAGE 243

QCB-H



PAGE 244


FACE MILLING CUTTER

SFKN .. 88



Axial rake angle : -7°

Radial rake angle
D40 : -12°
D50~125 : -10°

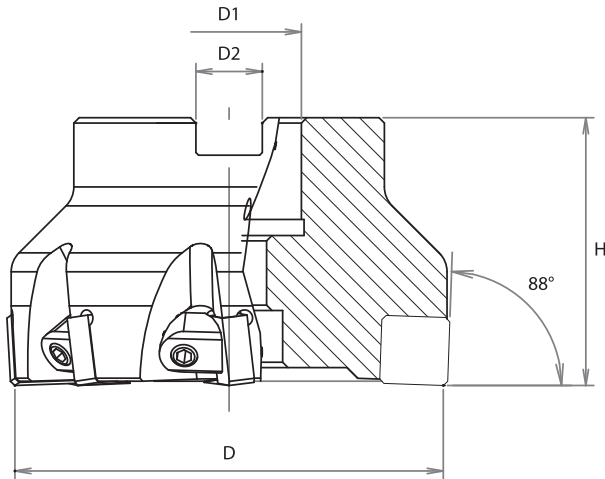


Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFKN 040-04-88 N4	40	16	8.4	40	4	SNCN 0904 ZZT
SFKN 050-05-88 N4	50	22	10.4	40	5	
SFKN 063-06-88 N4	63	22	10.4	40	6	SNCN 1204 ZZT SNCN 1204 ZN
SFKN 080-08-88 N4A	80	25.4	9.5	50	8	
SFKN 080-08-88 N4	80	27	12.4	50	8	
SFKN 100-10-88 N4A	100	31.75	12.7	50	10	
SFKN 100-10-88 N4	100	32	14.4	50	10	
SFKN 125-12-88 N4A	125	38.1	15.9	63	12	
SFKN 125-12-88 N4	125	40	16.4	63	12	

Dimensions (mm) D	Spare parts		
	Wedge	Wedge Screw	Wrench
40 - 50	SSW9	WS6 (M6)	LW3
63 - 125	SSW10	WS6 (M6)	LW3

Recommended Cutting Condition for Gray Cast Iron


Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)	Surface Quality Ra(μm)
Roughing	190~210	800~2,000	0.08~0.15	2.0~5.0	6.3~12.5
Roughing	220~240	500~1,500	0.08~0.15	2.0~5.0	6.3~12.5
Roughing	250~280	300~1,200	0.08~0.15	2.0~5.0	6.3~12.5

SNCN .. ZZT

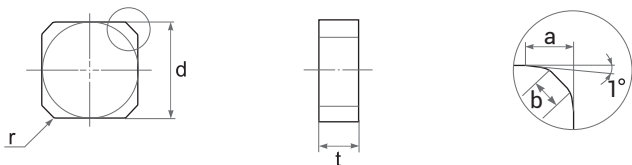

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	a	b																			
SNCN 0904 ZZT	SNCN 33 ZZT	9.52	4.76	1.30	1.10												●	●		●	●			
SNCN 1204 ZZT	SNCN 43 ZZT	12.70	4.76	3.25	1.10												●	●		●	●			

SNCN .. ZN

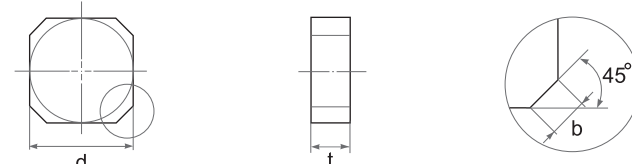


Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	b																				
SNCN 1204 ZN	SNCN 43 ZN	12.70	4.76	1.10													●							

FACE MILLING CUTTER

SFKN .. 75



Axial rake angle : -6°
Radial rake angle : -10°

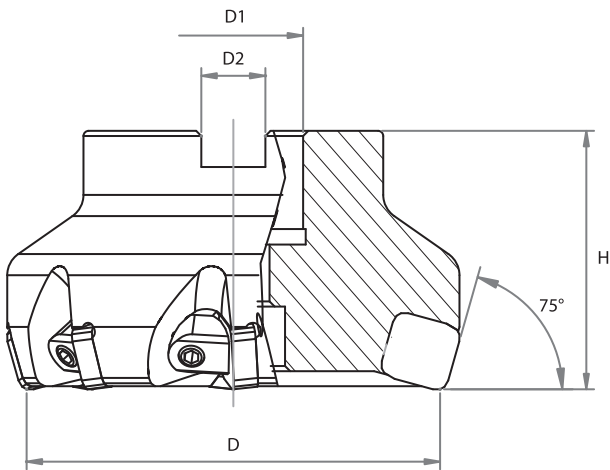




Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFKN 050-05-75 N4	50	22	10.4	40	5	SNCN 1204 ENTN SNGN 1204 □□
SFKN 063-06-75 N4	63	22	10.4	40	6	
SFKN 080-08-75 N4A	80	25.4	9.5	50	8	
SFKN 080-08-75 N4	80	27	12.4	50	8	
SFKN 100-10-75 N4A	100	31.75	12.7	50	10	
SFKN 100-10-75 N4	100	32	14.4	50	10	
SFKN 125-12-75 N4A	125	38.1	15.9	63	12	
SFKN 125-12-75 N4	125	40	16.4	63	12	

Dimensions (mm)	Spare parts		
D	Wedge	Wedge Screw	Wrench
50	SSW10	WS6 (M6)	LW3
63 - 125	SSW10	WS6 (M6)	LW3

Recommended Cutting Condition for Gray Cast Iron


Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)	Surface Quality Ra(μm)
Roughing	190~210	800~2,000	0.10~0.20	2.0~5.0	6.3~12.5
Roughing	220~240	500~1,500	0.10~0.20	2.0~5.0	6.3~12.5
Roughing	250~280	300~1,200	0.10~0.20	2.0~5.0	6.3~12.5

SNCN .. ENTN



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	a	b																			
SNCN 1204 ENTN	SNCN 43 ENTN	12.70	4.76	1.40	1.00																			

SNGN



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	r																				
SNGN 120412	SNGN 433	12.70	4.76	1.2																				
SNGN 120416	SNGN 434	12.70	4.76	1.6																				


FACE MILLING CUTTER

SFKN .. 45



Axial rake angle : -6°

Radial rake angle : -12°

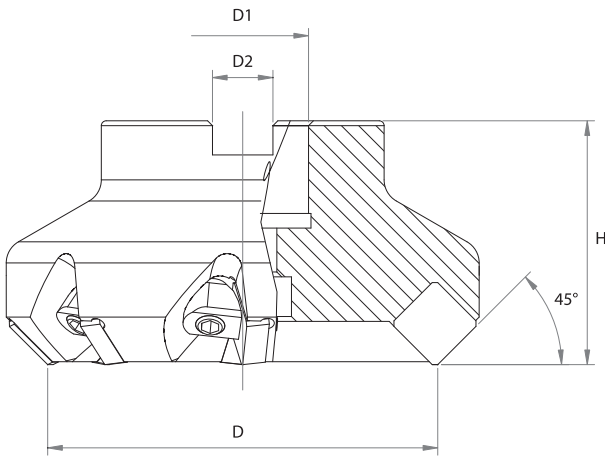




Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFKN 050-05-45 N4	50	22	10.4	40	5	SNCN 1204 AN SNCN 1204 ZN SNGN 1204 □□
SFKN 063-06-45 N4	63	22	10.4	40	6	
SFKN 080-08-45 N4A	80	25.4	9.5	50	8	
SFKN 080-08-45 N4	80	27	12.4	50	8	
SFKN 100-10-45 N4A	100	31.75	12.7	50	10	
SFKN 100-10-45 N4	100	32	14.4	50	10	
SFKN 125-12-45 N4A	125	38.1	15.9	63	12	
SFKN 125-12-45 N4	125	40	16.4	63	12	

Dimensions (mm)	Spare parts		
D	Wedge	Wedge Screw	Wrench
50	SSW10	WS6 (M6)	LW3
63 - 125	SSW10	WS6 (M6)	LW3

Recommended Cutting Condition for Gray Cast Iron


Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)	Surface Quality Ra(μm)
Roughing	190 ~210	800 ~2,000	0.15 ~0.30	2.0 ~5.0	3.2 ~12.5
Roughing	220 ~240	500 ~1,500	0.15 ~0.30	2.0 ~5.0	3.2 ~12.5
Roughing	250 ~280	300 ~1,200	0.15 ~0.30	2.0 ~5.0	3.2 ~12.5

SNCN



Type		Dimensions (mm)			ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	b																			
SNCN 1204 AN	SNCN 43 AN	12.70	4.76	2.50												●							
SNCN 1204 ZN	SNCN 43 ZN	12.70	4.76	1.10												●							

SNGN



Type		Dimensions (mm)			ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	r																			
SNGN 120412	SNGN 433	12.70	4.76	1.2												●							
SNGN 120416	SNGN 434	12.70	4.76	1.6												●							


FACE MILLING CUTTER

SFKP .. 88



Axial rake angle : +7°

Radial rake angle : +3°

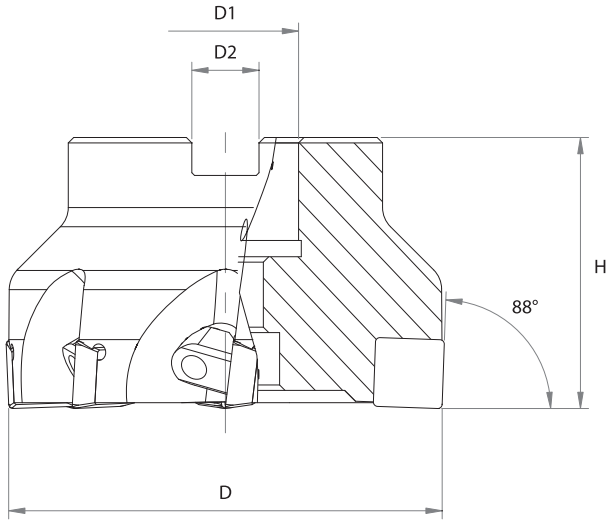


Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFKP 050-05-88 N4	50	22	10.4	40	5	SDCN 1204 □□ T20
SFKP 063-06-88 N4	63	22	10.4	40	6	
SFKP 080-08-88 N4A	80	25.4	9.5	50	8	
SFKP 080-08-88 N4	80	27	12.4	50	8	
SFKP 100-10-88 N4A	100	31.75	12.7	50	10	
SFKP 100-10-88 N4	100	32	14.4	50	10	
SFKP 125-12-88 N4A	125	38.1	15.9	63	12	
SFKP 125-12-88 N4	125	40	16.4	63	12	

Dimensions (mm) D	Spare parts		
	Wedge	Wedge Screw	Wrench
50	SSW9	WS6 (M6)	LW3
63 - 125	SSW10	WS6 (M6)	LW3

Recommended Cutting Condition for Gray Cast Iron

Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)	Surface Quality Ra(μm)
Roughing	190~210	800~2,000	0.08~0.15	2.0~5.0	6.3~12.5
Roughing	220~240	500~1,500	0.08~0.15	2.0~5.0	6.3~12.5
Roughing	250~280	300~1,200	0.08~0.15	2.0~5.0	6.3~12.5

SDCN .. T

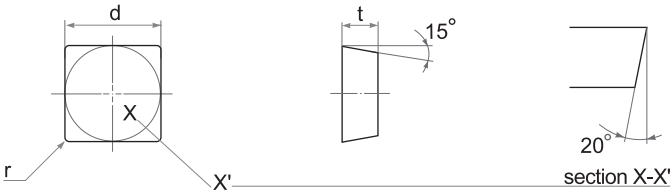

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	r																			
SDCN 120408 T20	SDCN 432 T20	12.70	4.76	0.8												●							
SDCN 120412 T20	SDCN 433 T20	12.70	4.76	1.2												●							


FACE MILLING CUTTER

SFKP .. 75



Axial rake angle : +5°

Radial rake angle : 0°

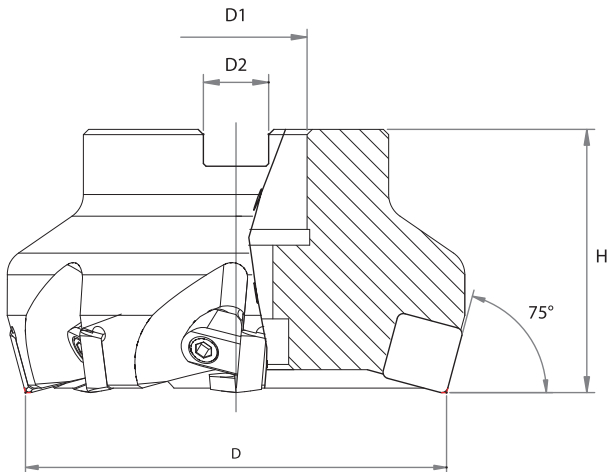


Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFKP 050-05-75 N4	50	22	10.4	40	5	SPCN 1204□□T15 SPKN 1204SP EDTR
SFKP 063-06-75 N4	63	22	10.4	40	6	
SFKP 080-08-75 N4A	80	25.4	9.5	50	8	
SFKP 080-08-75 N4	80	27	12.4	50	8	
SFKP 100-10-75 N4A	100	31.75	12.7	50	10	
SFKP 100-10-75 N4	100	32	14.4	50	10	
SFKP 125-12-75 N4A	125	38.1	15.9	63	12	
SFKP 125-12-75 N4	125	40	16.4	63	12	

Dimensions (mm)	Spare parts		
D	Wedge	Wedge Screw	Wrench
50	SSW9	WS6 (M6)	LW3
63 - 125	SSW10	WS6 (M6)	LW3

Recommended Cutting Condition for Gray Cast Iron


Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)	Surface Quality Ra(μm)
Roughing	190~210	800~2,000	0.10~0.20	2.0~5.0	3.2~12.5
Roughing	220~240	500~1,500	0.10~0.20	2.0~5.0	3.2~12.5
Roughing	250~280	300~1,200	0.10~0.20	2.0~5.0	3.2~12.5

SPCN .. T

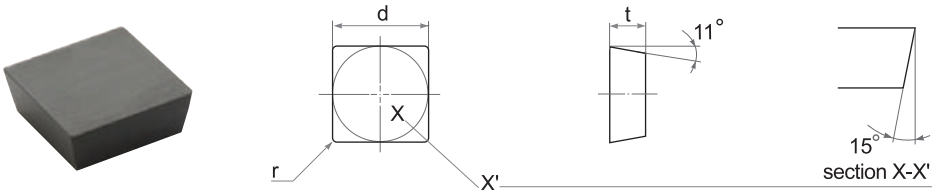

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	r																			
SPCN 120412 T15	SPCN 433 T15	12.70	4.76	1.2												●							
SPCN 120416 T15	SPCN 434 T15	12.70	4.76	1.6												●							

SPKN .. SP

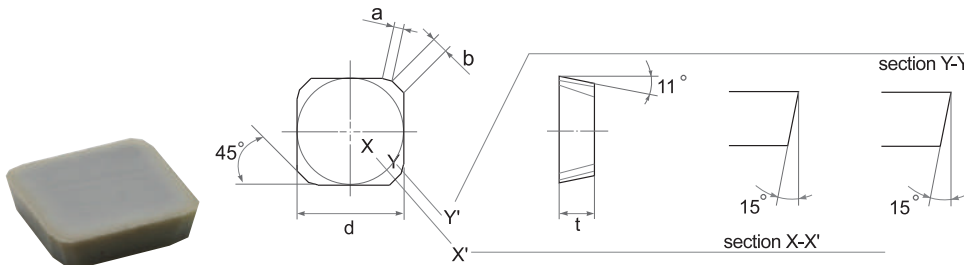


Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	a	b																			
SPKN 1204SP EDTR	SPKN 43SP EDTR	12.70	4.76	1.10	1.30												●							

FACE MILLING CUTTER

SFKP .. 45



Axial rake angle : +19°
Radial rake angle : -6°

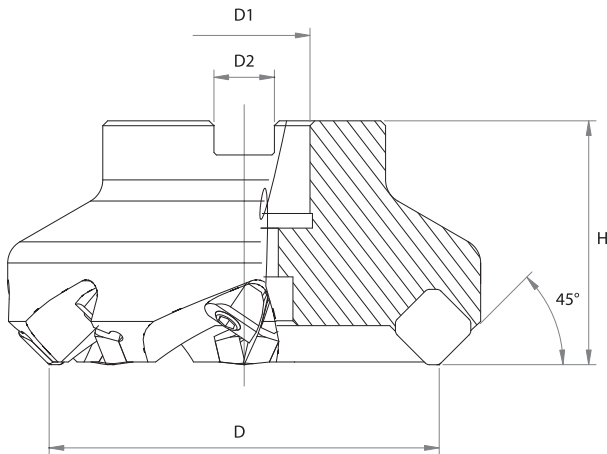


Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFKP 050-05-45 N4	50	22	10.4	40	5	SEAN 1204 AFTN W25 SEAN 1204□□T25
SFKP 063-06-45 N4	63	22	10.4	40	6	
SFKP 080-08-45 N4A	80	25.4	9.5	50	8	
SFKP 080-08-45 N4	80	27	12.4	50	8	
SFKP 100-10-45 N4A	100	31.75	12.7	50	10	
SFKP 100-10-45 N4	100	32	14.4	50	10	SEAN 1203 NWAFTN SEAN 1203 AFTN
SFKP 050-05-45 N3	50	22	10.4	40	5	
SFKP 063-06-45 N3	63	22	10.4	40	6	
SFKP 080-08-45 N3A	80	25.4	9.5	50	8	
SFKP 080-08-45 N3	80	27	12.4	50	8	
SFKP 100-10-45 N3A	100	31.75	12.7	50	10	
SFKP 100-10-45 N3	100	32	14.4	50	10	

Dimensions (mm)		Spare parts		
D		Wedge	Wedge Screw	Wrench
50		SSW9	WS6 (M6)	LW3
63 - 100		SSW10	WS6 (M6)	LW3

Recommended Cutting Condition for Gray Cast Iron


Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)	Surface Quality Ra(μm)
Roughing	190~210	800~2,000	0.15~0.30	2.0~5.0	6.3~12.5
Roughing	220~240	500~1,500	0.15~0.30	2.0~5.0	6.3~12.5
Roughing	250~280	300~1,200	0.15~0.30	2.0~5.0	6.3~12.5

SEAN

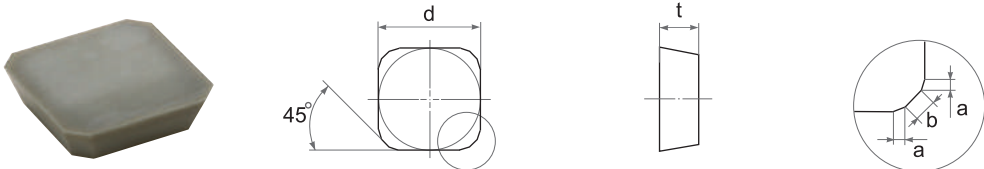


Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	a	b																			
SEAN 1203 AFTN	SEAN 42 AFTN	12.70	3.18	0.50	1.80											●	●	●						

SEAN .. NW

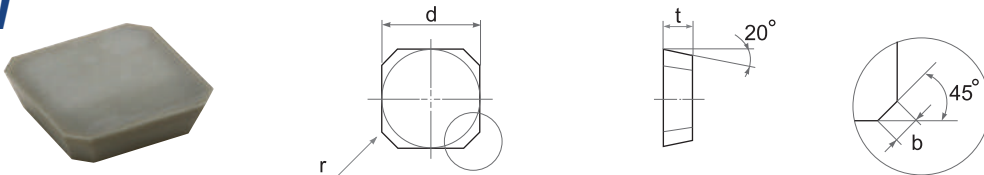

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	b	r																			
SEAN 1203 NWAFTN	SEAN 42 NWAFTN	12.70	3.18	2.40	0.4											●								
SEAN 1204 AFTNW25	SEAN 43 AFTNW25	12.70	4.76	2.50	1.2												●							

SEAN .. T

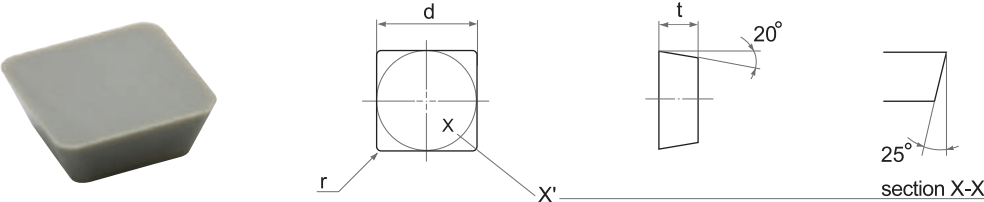

Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	a																				
SEAN 120412 T25	SEAN 433 T25	12.70	4.76	1.2													●					●		
SEAN 120416 T25	SEAN 434 T25	12.70	4.76	1.6													●					●		


FACE MILLING CUTTER

SFAN .. 88



Axial rake angle : -7°

Radial rake angle : -10°

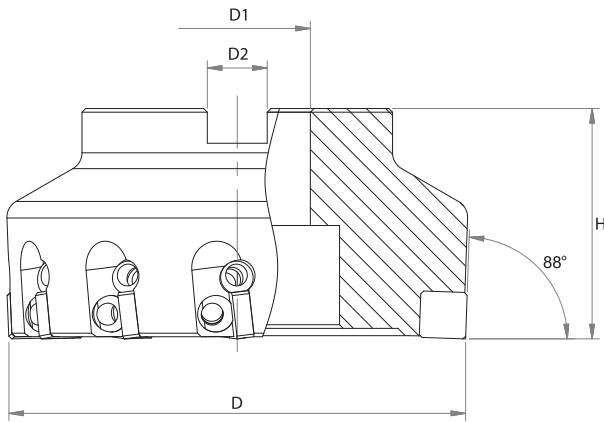




Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFAN 063-06-88 N4	63	22	10.4	40	6	SNCN 1204 ZZT SNCN 1204 ZN
SFAN 080-08-88 N4A	80	25.4	9.5	50	8	
SFAN 080-08-88 N4	80	27	12.4	50	8	
SFAN 100-10-88 N4A	100	31.75	12.7	50	10	
SFAN 100-10-88 N4	100	32	14.4	50	10	
SFAN 125-12-88 N4A	125	38.1	15.9	63	12	
SFAN 125-12-88 N4	125	40	16.4	63	12	

Dimensions (mm)	Spare parts				
D	Wedge	Wedge Screw	Adjust Wedge	Adjust Wedge Screw	Wrench
					
63 - 125	SW16	WS6 (M6)	SAW 20	WS6 (M6)	LW3

Recommended Cutting Condition for Gray Cast Iron




Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)	Surface Quality Ra(μm)
Roughing	190~210	800~2,000	0.08~0.15	2.0~5.0	6.3~12.5
Roughing	220~240	500~1,500	0.08~0.15	2.0~5.0	6.3~12.5
Roughing	250~280	300~1,200	0.08~0.15	2.0~5.0	6.3~12.5
Finishing	190~210	200~900	0.05~0.10	0.1~0.5	0.8
Finishing	220~240	200~700	0.05~0.10	0.1~0.5	0.8
Finishing	250~280	200~500	0.05~0.10	0.1~0.5	0.8

SNCN .. ZZT



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	a	b																			
SNCN 1204 ZZT	SNCN 43 ZZT	12.70	4.76	3.25	1.10		●										●	●		●	●			

SNCN .. ZN



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	b																				
SNCN 1204 ZN	SNCN 43 ZN	12.70	4.76	1.10													●							


FACE MILLING CUTTER

SFAN .. 75



Axial rake angle : -6°

Radial rake angle : -10°

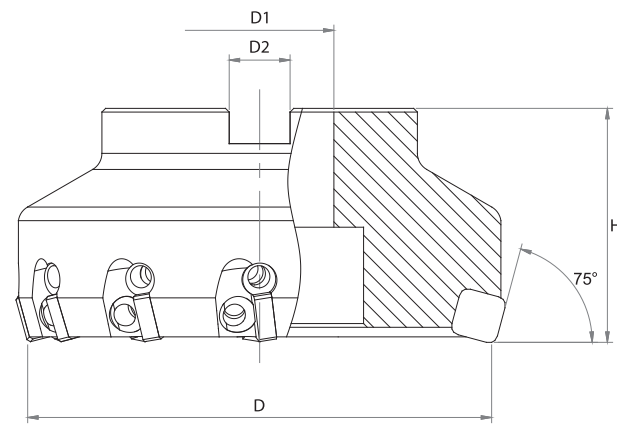



Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFAN 063-06-75 N4	63	22	10.4	40	6	SNCN 1204 ENTN SNGN 1204 □□
SFAN 080-08-75 N4A	80	25.4	9.5	50	8	
SFAN 080-08-75 N4	80	27	12.4	50	8	
SFAN 100-10-75 N4A	100	31.75	12.7	50	10	
SFAN 100-10-75 N4	100	32	14.4	50	10	
SFAN 125-12-75 N4A	125	38.1	15.9	63	12	
SFAN 125-12-75 N4	125	40	16.4	63	12	

Dimensions (mm)	Spare parts				
D	Wedge	Wedge Screw	Adjust Wedge	Adjust Wedge Screw	Wrench
					
63 - 125	SW16	WS6 (M6)	SAW 20	WS6 (M6)	LW3

Recommended Cutting Condition for Gray Cast Iron



Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)	Surface Quality Ra(μm)
Roughing	190~210	800~2,000	0.08~0.15	2.0~5.0	6.3~12.5
Roughing	220~240	500~1,500	0.08~0.15	2.0~5.0	6.3~12.5
Roughing	250~280	300~1,200	0.08~0.15	2.0~5.0	6.3~12.5
Finishing	190~210	200~900	0.08~0.15	0.1~0.5	0.8
Finishing	220~240	200~700	0.08~0.15	0.1~0.5	0.8
Finishing	250~280	200~500	0.08~0.15	0.1~0.5	0.8

SNCN .. ENTN



Type		Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	a	b																			
SNCN 1204 ENTN	SNCN 43 ENTN	12.70	4.76	1.40	1.00										●	●	●							


SNGN



Type		Dimensions (mm)			ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	r																			
SNGN 120412	SNGN 433	12.70	4.76	1.2		●										●							
SNGN 120416	SNGN 434	12.70	4.76	1.6		●										●							


FACE MILLING CUTTER

SFSX .. 00 .. EC

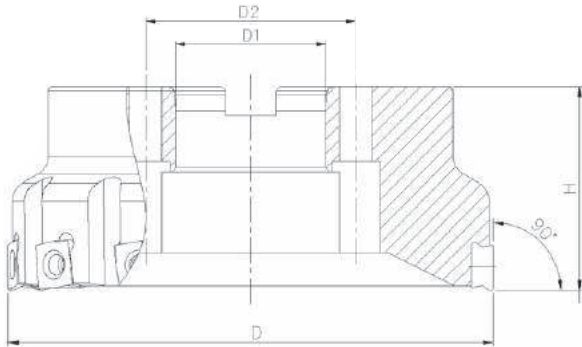

Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFSX 050-05-00-A5EC	50	22		40	5	SPHX1205 NR
SFSX 050-05-00-A5ECA	50.8	19.05		44.5	5	
SFSX 063-07-00-A5EC	63	22	-	40	7	
SFSX 063-07-00-A5ECA	63.5	19.05		44.5	7	
SFSX 080-08-00-A5EC	80	27	-	50	8	
SFSX 080-08-00-A5ECA	76.2	25.4		44.5	8	
SFSX 100-12-00-A5EC	100	32	-	50	12	
SFSX 100-12-00-A5ECA	101.6	38.1		60.5	12	
SFSX 125-15-00-A5EC	125	40	-	63	15	
SFSX 125-15-00-A5ECA	127.0	38.1		60.5	15	
SFSX 160-18-00-A5EC	160	40	66.7	63	18	
SFSX 160-18-00-A5ECA	152.4	50.8		60.5	18	
SFSX 200-24-00-A5EC	200	60		63	24	
SFSX 200-24-00-A5ECA	203.2	63.5		60.5	24	
SFSX 250-30-00-A5EC	250	60		63	30	
SFSX 250-30-00-A5ECA	254.0	63.5		60.5	30	
SFSX 080-06-00-AT6EC	80	27	-	50	6	SPHX15T6 NR
SFSX 080-06-00-AT6ECA	76.2	25.4		44.5	6	
SFSX 100-08-00-AT6EC	100	32	-	50	8	
SFSX 100-08-00-AT6ECA	101.6	31.75		44.5	8	
SFSX 125-10-00-AT6EC	125	40	-	63	10	
SFSX 125-10-00-AT6ECA	127	38.1		60.5	10	
SFSX 160-14-00-AT6EC	160	40	66.7	63	14	
SFSX 160-14-00-AT6ECA	152.4	50.8		60.5	14	

SPHX

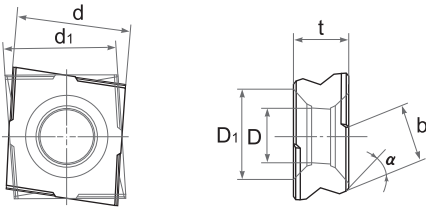

Type	Dimensions (mm)							ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	d	t	a	b	t	a	b																			
SPHX 1205NR 480T	11.67	11.33	5.50	5.10	8.41	45	8.0													●	●					
SPHX 1205NL 480T	11.67	11.33	5.50	5.10	8.41	45	8.0																			
SPHX 15T6NR 880T	14.58	14.33	6.60	6.10	10.18	45	8.80												●	●						


Dimensions (mm)	Spare parts	
	Screw	Wrench
50 - 250 (SPHX1205 NR)	C94010	T15
80 - 160 (SPHX15T6 NR)	C95012	T20

Recommended Cutting Conditions

Process	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm) max
Gray Cast Irons	500 ~1,400	0.15 ~0.25	~5.0
Ductile Cast Irons	450 ~900	0.10 ~0.20	~3.0


FACE MILLING CUTTER

SFSX .. 70 .. EC

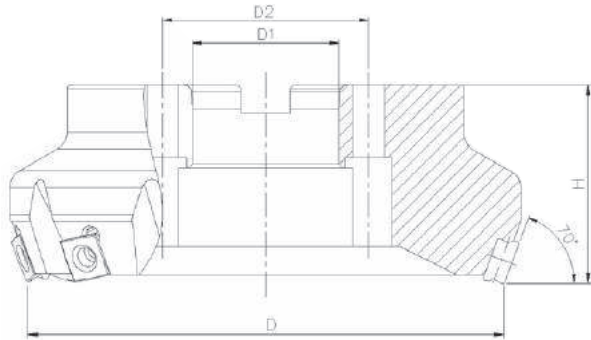

Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFSX 050-05-70-A5EC	50	22		40	5	SPHX1205 ER
SFSX 050-05-70-A5ECA	50.8	19.05		44.5	5	
SFSX 063-07-70-A5EC	63	22	-	40	7	
SFSX 063-07-70-A5ECA	63.5	19.05		44.5	7	
SFSX 080-08-70-A5EC	80	27	-	50	8	
SFSX 080-08-70-A5ECA	76.2	25.4		44.5	8	
SFSX 100-12-70-A5EC	100	32	-	50	12	
SFSX 100-12-70-A5ECA	101.6	38.1		60.5	12	
SFSX 125-15-70-A5EC	125	40	-	63	15	
SFSX 125-15-70-A5ECA	127.0	38.1		60.5	15	
SFSX 160-18-70-A5EC	160	40	66.7	63	18	
SFSX 160-18-70-A5ECA	152.4	50.8	101.6	60.5	18	
SFSX 200-24-70-A5EC	200	60	101.6	63	24	
SFSX 200-24-70-A5ECA	203.2	63.5	101.6	60.5	24	
SFSX 250-30-70-A5EC	250	60	101.6	63	30	SPHX15T6 ER
SFSX 250-30-70-A5ECA	254.0	63.5	101.6	60.5	30	
SFSX 080-07-70-AT6EC	80	27	-	50	7	
SFSX 080-07-70-AT6ECA	76.2	25.4		44.5	7	
SFSX 100-09-70-AT6EC	100	32	-	50	9	
SFSX 100-09-70-AT6ECA	101.6	31.75		44.5	9	
SFSX 125-12-70-AT6EC	125	40	-	63	12	
SFSX 125-12-70-AT6ECA	127	38.1		60.5	12	
SFSX 160-16-70-AT6EC	160	40	66.7	63	16	
SFSX 160-16-70-AT6ECA	152.4	50.8	-	60.5	16	

SPHX

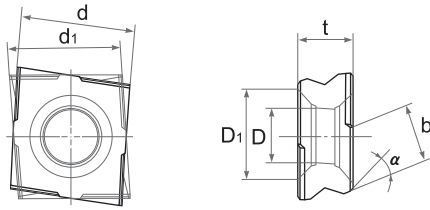

Type	Dimensions (mm)							ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	d	d ₁	t	D	D ₁	α	b																			
SPHX 1205ER 855T	12.09	11.33	5.50	5.10	8.41	35	5.50												●	●						
SPHX 1205EL 855T	12.09	11.33	5.50	5.10	8.41	35	5.50												●							
SPHX 15T6ER 865T	15.50	14.33	6.60	6.10	10.18	35	6.50												●	●						

Dimensions (mm)	Spare parts	
	Screw	Wrench
50 - 250 (SPHX1205 ER)	C94010	T15
80 - 160 (SPHX15T6 ER)	C95012	T20

Recommended Cutting Conditions


Process	Cutting Speed V _c (m/min)	Feed f _z (mm/z)	Depth a _p (mm) max
Gray Cast Irons	500~1,400	0.15~0.25	~5.0
Ductile Cast Irons	450~900	0.10~0.20	~3.0

FACE MILLING CUTTER

SFSP .. OT




Axial rake angle : +3°
Radial rake angle : +7°

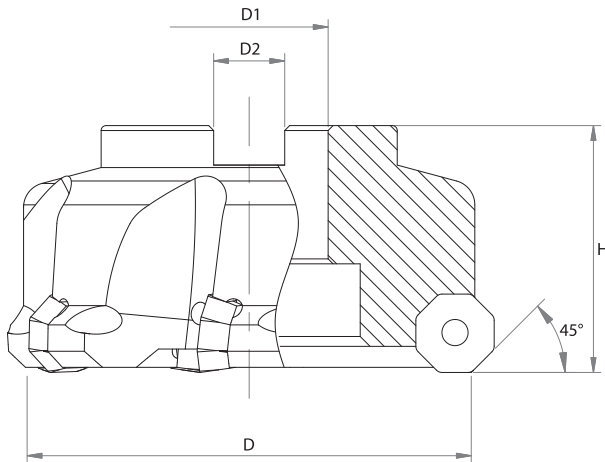

Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFSP 063-05-45-A4 OT	63	22	10.40	40	5	OEGB 0704 □□
SFSP 080-06-45-A4 OT	80	27	12.40	50	6	
SFSP 100-07-45-A4 OT	100	32	14.40	50	7	

Dimensions (mm)	Spare parts	
	Screw	Wrench
63 - 100	SWS 21480072	T20

OEGB

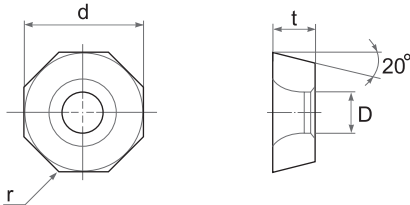

Type	Dimensions (mm)				ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
	d	t	D	r																			
OEGB 070408	15.87	4.76	5.18	0.8												●							
OEGB 070416	15.87	4.76	5.18	1.6											●	●							

FACE MILLING CUTTER

SFKN .. HX





D : 80~200

Axial rake angle : -6°



D : 250~315


Radial rake angle : -7°

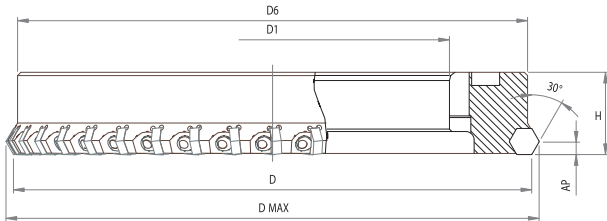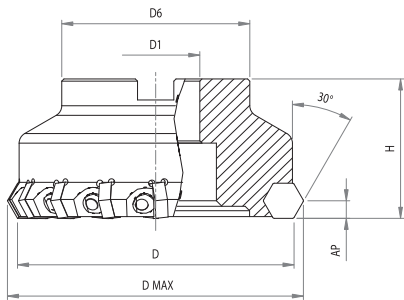

Type	Dimensions (mm)						AP max	Insert
	D	D(max)	D ₁	D ₆	H			
SFKN 080-08-30 N5HXA	80	88.7	25.4	52	50	8	8	HNEN 090520 HNEN 090530 HNEN 090508 ANSN
SFKN 080-08-30 N5HX	80	88.7	27	58	50	8	8	
SFKN 100-10-30 N5HXA	100	108.7	31.75	60	50	10	8	
SFKN 100-10-30 N5HX	100	108.7	32	60	50	10	8	
SFKN 125-16-30 N5HXA	125	133.7	38.1	80	63	16	8	
SFKN 125-16-30 N5HX	125	133.7	40	85	63	16	8	
SFKN 160-20-30 N5HXA	160	168.7	50.8	99	63	20	8	
SFKN 160-20-30 N5HX	160	168.7	40	85	63	20	8	
SFKN 200-26-30 N5HXA	200	208.7	47.625	128.57	63	26	8	
SFKN 200-26-30 N5HX	200	208.7	60	140	63	26	8	
SFKN 250-30-30 N5HXA	250	258.7	160.02	-	50	30	8	
SFKN 315-40-30 N5HXA	315	323.7	215.02	-	50	40	8	

Dimensions (mm)	Spare parts		
	Wedge	Wedge Screw	Wrench
80 - 315	DT-SW16	WS6	LW3


HNEN

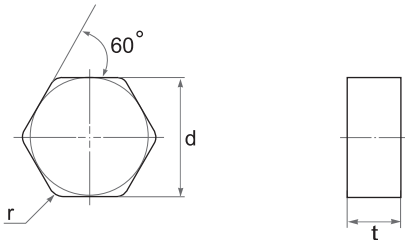

Type	Dimensions (mm)			ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
	d	t	r																			
HNEN 090520	16.20	5.56	2.0											●	●							
HNEN 090530	16.20	5.56	3.0											●	●							
HNEN 090508 ANSN	15.87	5.64	0.8											●	●			●	●			

FACE MILLING CUTTER

SFKP .. MF

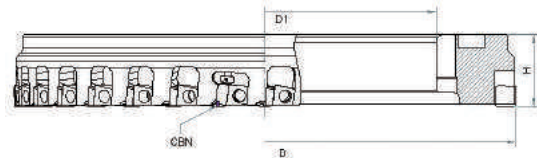

Type	Dimensions (mm)					Insert
	D	D ₁	H	Ceramic	CBN	
SFKP 250-20-00 N4MF	250	160.02	50	18	2	SPCN120412(Ceramic)+CBN(Wiper)
SFKP 315-32-00 N4MF	315	215.02	50	28	4	SPCN120412(Ceramic)+CBN(Wiper)

Dimensions (mm)	Spare parts			
D	Wedge	Adjust Screw	Wedge Screw	Wrench
250 - 315	DT-DW01	AJM 5F	WS8	LW4


Recommended Cutting Condition for Gray Cast Iron

Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)
Finishing	190~210	200~800	0.08~0.15	0.1~0.5
Finishing	220~240	200~600	0.08~0.15	0.1~0.5
Finishing	250~280	200~400	0.08~0.15	0.1~0.5

Recommended Cutting Condition for Ductile Cast Iron


Process	Tensile Strength	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)
Finishing	400~500	300~600	0.08~0.15	0.1~0.5
Finishing	500~700	200~500	0.08~0.15	0.1~0.5

SPCN .. T

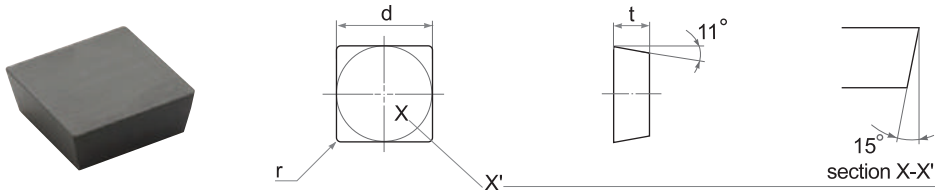

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	r																			
SPCN 120412 T15	SPCN 433 T15	12.70	4.76	1.2																			

SPCN .. T

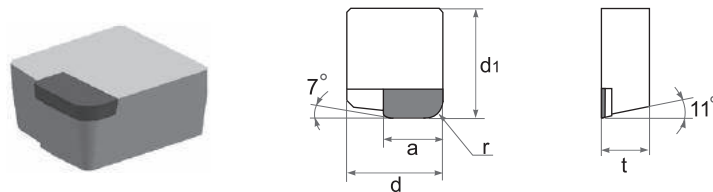


Type		Dimensions (mm)						PCBN	
ISO	ASA	d	D ₁	t	a	r		SBN1000	SBN2000
SPC 1206 ZZR2X	SPC 44 ZZR2X	12.70	14.50	6.35	7.80	2.0			

FACE MILLING CUTTER

SFMS (MULTI-STEP) .. LRF




Axial rake angle : +5°
Radial rake angle : +6°

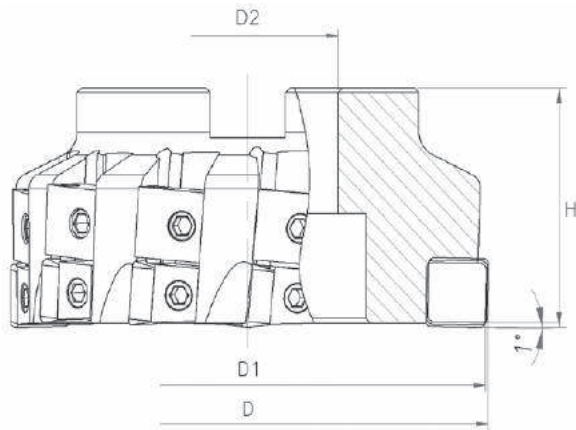

Type	Dimensions (mm)				Insert per set		Insert
	D	D ₁	D ₂	H			
SFMS 80-09-P4N.LRF	76.20	75.20	25.40	47.60	3	9	SPCN 1204 □□ T15
SFMS 100-12-P4N.LRF	101.60	100.60	38.10	47.60	3	12	
SFMS 125-15-P4N.LRF	127.00	126.00	38.10	47.60	3	15	
SFMS 160-18-P4N.LRF	152.40	151.40	50.80	47.60	3	18	


Dimensions (mm) D	Spare parts				
	Wedge	Wedge Screw	ADJ Wedge	ADJ Wedge Screw	Wrench
80 - 160	DT-SW14	WS6	DT-SW15	WS6	LW3



Recommended Cutting Condition for Gray Cast Iron

Process	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm)	Surface Quality Ra(μm)
Light Rough & Finish	190~310	240~1,200	0.08~0.60	2.0~3.80	6.3~12.5


SPCN .. T

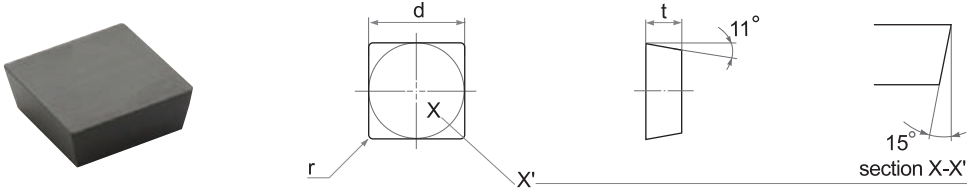

Type		Dimensions (mm)			ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t	r																			
SPCN 120412 T15	SPCN 433 T15	12.70	4.76	1.2												●							
SPCN 120416 T15	SPCN 434 T15	12.70	4.76	1.6												●							

FACE MILLING CUTTER



SFCN .. 00 .. R

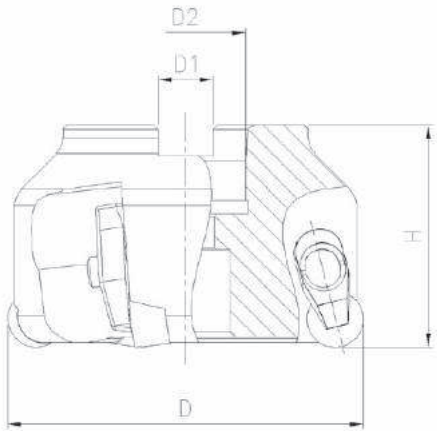

Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFCN 050-04-00 R4	50	10.4	22	50	4	RNGN 120400
SFCN 050-04-00 R4A	50.8	7.9	19.05	50	4	
SFCN 063-04-00 R4	63	10.4	22	50	4	
SFCN 063-04-00 R4A	63.5	7.9	19.05	50	4	
SFCN 080-05-00 R4	80	12.4	27	50	5	
SFCN 080-05-00 R4A	76.2	9.5	25.4	50	5	
SFCN 100-06-00 R4	100	14.4	32	50	6	
SFCN 100-06-00 R4A	101.6	12.7	31.75	50	6	
SFCN 050-04-00 R7	50	10.4	22	50	4	RNGN 120700
SFCN 050-04-00 R7A	50.8	7.9	19.05	50	4	
SFCN 063-04-00 R7	63	10.4	22	50	4	
SFCN 063-04-00 R7A	63.5	7.9	19.05	50	4	
SFCN 080-05-00 R7	80	12.4	27	50	5	
SFCN 080-05-00 R7A	76.2	9.5	25.4	50	5	
SFCN 100-06-00 R7	100	14.4	32	50	6	
SFCN 100-06-00 R7A	101.6	12.7	31.75	50	6	

Dimensions (mm)	Spare parts			
	Clamp	Clamp Screw	Spring	Wrench
50 - 100	AMS6T	AOB-6S	SP5	LW3


RNGN



Type		Dimensions (mm)		Grade			
ISO	ASA	d	t	SW400	SW800	SN800	SN1000
RNGN 120400	RNGN 43	12.7	4.76	●	●	●	●
RNGN 120700	RNGN 45	12.7	7.94	●	●	●	●

FACE MILLING CUTTER


SFCP .. 00 .. R

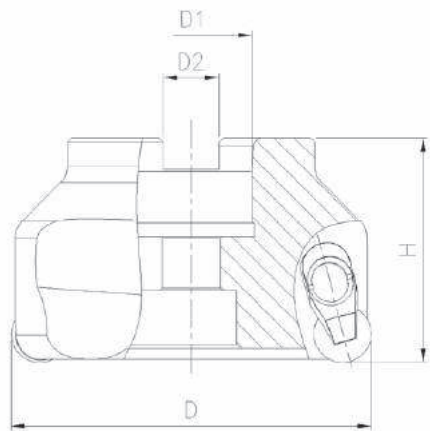

Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFCP 050-04-00 R4	50	10.4	22	50	4	RPGN 120400
SFCP 050-04-00 R4A	50.8	7.9	19.05	50	4	
SFCP 063-04-00 R4	63	10.4	22	50	4	
SFCP 063-04-00 R4A	63.5	7.9	19.05	50	4	
SFCP 080-05-00 R4	80	12.4	27	50	5	
SFCP 080-05-00 R4A	76.2	9.5	25.4	50	5	
SFCP 100-06-00 R4	100	14.4	32	50	6	
SFCP 100-06-00 R4A	101.6	12.7	31.75	50	6	

Dimensions (mm)	Spare parts			
	Clamp	Clamp Screw	Spring	Wrench
50 - 100	AMS6T	A0B-6S	SP5	LW3


RPGN



Type		Dimensions (mm)		Grade			
ISO	ASA	d	t	SW400	SW800	SN800	SN1000
RPGN120400	RPGN 43	12.7	4.76				

FACE MILLING CUTTER

SFXN

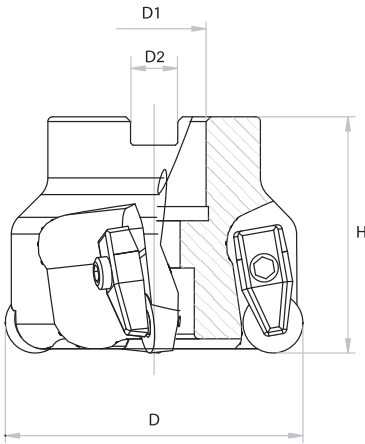

Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFXN 050-03-00 RX7A	50	19.05	7.9	50	3	RNGX 1207 DP
SFXN 050-03-00 RX7	50	22	10.4	50	3	
SFXN 063-04-00 RX7A	63	19.05	12.7	50	4	
SFXN 063-04-00 RX7	63	22	10.4	50	4	
SFXN 080-05-00 RX7A	80	25.4	9.5	50	5	
SFXN 080-05-00 RX7	80	27	12.4	50	5	
SFXN 100-06-00 RX7A	100	31.75	12.7	50	6	
SFXN 100-06-00 RX7	100	32	14.4	50	6	

Dimensions (mm)	Spare parts			
	Clamp	Screw	Spring	Wrench
50 - 100	SCL 5M	SLS4	SP4	LW3

Recommended Cutting Conditions

Work - Piece	Hardness (HB)	Cutting Speed V _c (m/min)	Feed f _z (mm/z)	Depth a _p (mm) max
Iron-base, Heat-resistant alloys	135~328	300~900	0.05~0.13	6.35
Cobalt-base, Heat-resistant alloys	150~425	270~1,200	0.05~0.13	6.35
Nickel base, Heat-resistant alloys	140~475	270~1,200	0.05~0.13	6.35
PH Stainless steels	135~450	520~700	0.08~0.10	6.35


RNGX .. DP



Type		Dimensions (mm)		ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t																			
RNGX 1207 DP	RNGX 45 DP	12.70	7.94												●		●	●	●			

FACE MILLING CUTTER

SFXP

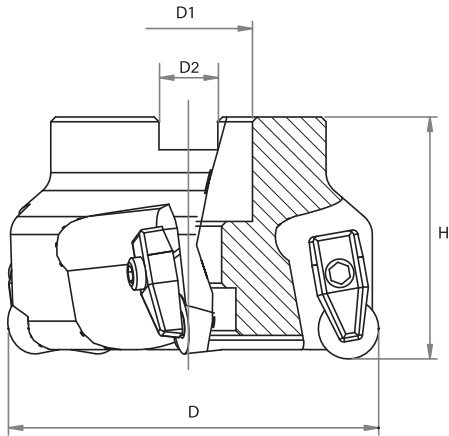



Type	Dimensions (mm)					Insert
	D	D ₁	D ₂	H		
SFXP 050-03-00 RP4A	50	19.05	7.9	50	3	RPGX 1204 DP
SFXP 050-03-00 RP4	50	22	10.4	50	3	
SFXP 050-04-00 RP4A	50	19.05	7.9	50	4	
SFXP 050-04-00 RP4	50	22	10.4	50	4	
SFXP 063-04-00 RP4A	63	19.05	7.9	63	4	
SFXP 063-04-00 RP4	63	22	10.4	63	4	
SFXP 080-05-00 RP4A	80	25.4	9.5	50	5	
SFXP 080-05-00 RP4	80	27	12.4	50	5	
SFXP 100-06-00 RP4A	100	31.75	12.7	50	6	
SFXP 100-06-00 RP4	100	32	14.4	50	6	

Dimensions (mm)	Spare parts			
	Clamp	Screw	Spring	Wrench
50 - 100	SCL 5M	SLS4	SP4	LW3

Recommended Cutting Conditions

Work - Piece	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth Ap(mm) max
Iron-base, Heat-resistant alloys	135~328	300~900	0.05~0.13	6.35
Cobalt-base, Heat-resistant alloys	150~425	270~1,200	0.05~0.13	6.35
Nickel base, Heat-resistant alloys	140~475	270~1,200	0.05~0.13	6.35
PH Stainless steels	135~450	520~700	0.08~0.10	6.35


RPGX .. DP



Type		Dimensions (mm)		ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t																			
RPGX 1204 DP	RPGX 43 DP	12.70	4.76												●			●	●			



FACE MILLING CUTTER

SFKN .. 90



Axial rake angle $\gamma_a = -6^\circ$
Radial rake angle $\gamma_r = -10^\circ$
Mounting According to DIN 8030

Type	Dimensions (mm)					Insert
	D	D ₁	L	L ₁		
SFKN 050-05-90 T4	50	22	10.4	40	5	TNCN 1604 TNGN 1604
SFKN 063-06-90 T4	63	22	10.4	40	6	
SFKN 080-08-90 T4	80	27	12.4	50	8	
SFKN 100-10-90 T4	100	32	14.4	50	10	
SFKN 125-12-90 T4	125	40	16.4	63	12	

Dimensions (mm)	Spare parts		
D	Wedge	Wedge Screw	Wrench
			
50~125	SSW10	WS6	LW3

Recommended Cutting Condition for Gray Cast Iron



Work - piece	Cutting Speed Vc [m/min]	Feed Fz [mm/z]	Depth Ap [mm] mx	Surface Quality Ra(μm)
Gray Cast Iron	600~1000	0.16~0.3	0.5~1.0	6.3~12.5

FACE MILLING CUTTER

SMCD .. 90



Type	Dimensions (mm)				Z	Insert
	D	D ₁	d ₂	L ₁		
SMCD 050-05-90	50	22	10	45	4	SNEW 09T3WF

Dimensions (mm)	Spare parts		
D	Screw	Wrench	Wedge
			
50	DS0618-T15	KH04008	WD081009-M6


SNEW



Type	Dimensions (mm)			SBN 1000	SBN 2000	SBN 3000	SBN 4000
	d	t	R				
SNEW 09T308	9.52	3.97	0.8				

FACE MILLING CUTTER

SECP

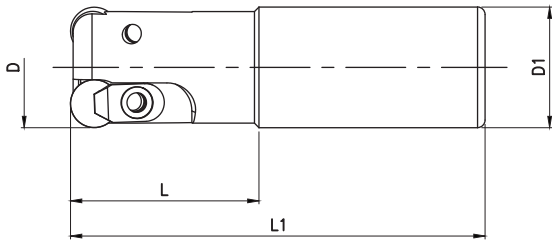

Type	Dimensions (mm)					Insert
	D	D ₁	L	L ₁		
SECP 016-02-2575 RP2	16	16	25	75	2	RPGN0602
SECP 020-02-3085 RP3	20	20	30	85	2	RPGN0903
SECP 020-03-3085 RP2	20	20	30	85	3	RPGN0602
SECP 025-03-4095 RP3	25	25	40	95	3	RPGN0903
SECP 032-03-50110 RP4	32	32	50	110	3	RPGN1204
SECP 040-04-50110 RP4	40	32	50	110	4	RPGN1204
SECP 016-02-2575 RP2A	16	15.88	25	75	2	RPGN0602
SECP 020-03-3085 RP3A	20	19.05	30	85	2	RPGN0903
SECP 020-03-3085 RP2A	20	19.05	30	85	3	RPGN0602
SECP-025-03-4095 RP3A	25	25.40	40	95	3	RPGN0903
SECP 032-03-50110 RP4A	32	31.75	50	110	3	RPGN1204
SECP 040-04-50110 RP4A	40	38.10	50	110	4	RPGN1204


Dimensions (mm)	Spare parts			
	Clamp	Clamp Screw	Spring	Wrench
16~40	AMS-3 AMS-4 AMS-5T	AOB3S AOB4S AOB5S	SP3 SP4 SP5	LW2 LW2.5 LW3

Work - Piece	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth Ap(mm) max
Iron Based Heat Resistant Alloys	135~328	800~1,400	0.05~0.15	6.35
Nickel Based Resistant Alloys	150~425	1,400~2,000	0.05~0.15	6.35
Cobalt Based Resistant Alloys	140~475	1,400~2,000	0.05~0.15	6.35

FACE MILLING CUTTER

BALL ENDMILL

SEXP

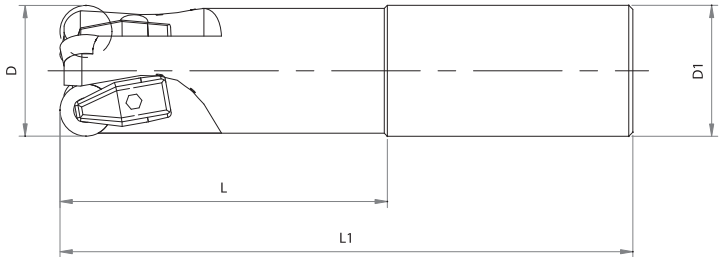



Type	Dimensions (mm)					Insert
	D	D ₁	L	L ₁		
SEXP 032-02-80140 X4	32	32	80	140	2	RPGX 1204 DP
SEXP 032-03-40100 X4A	32	31.75	40	100	3	
SEXP 032-03-40100 X4	32	32	40	100	3	
SEXP 032-03-80140 X4A	32	31.75	80	140	3	
SEXP 032-03-80140 X4	32	32	80	140	3	
SEXP 038-03-50100 X4A	38	38.1	50	100	3	
SEXP 038-03-50100 X4	38	32	50	100	3	
SEXP 038-03-90140 X4A	38	38.1	90	140	3	
SEXP 038-03-90140 X4	38	32	90	140	3	

Dimensions (mm)	Spare parts			
	Clamp	Screw	Spring	Wrench
32 - 38	SCL 5M	SLS4	SP4	LW3

Recommended Cutting Conditions

Work - Piece	Hardness (HB)	Cutting Speed Vc(m/min)	Feed fz(mm/z)	Depth ap(mm) max
Iron-base, Heat-resistant alloys	135~328	300~900	0.05~0.13	6.35
Cobalt-base, Heat-resistant alloys	150~425	270~1,200	0.05~0.13	6.35
Nickel base, Heat-resistant alloys	140~475	270~1,200	0.05~0.13	6.35
PH Stainless steels	135~450	520~700	0.08~0.10	6.35


RPGX .. DP



Type		Dimensions (mm)		ST100	ST300	ST500	ST900	TC300	TM300	SD200	SZ200	SZ300	SN26	SN300	SN400	SN500	SN600	SN800	SN1000	NC400	SW400	SW800
ISO	ASA	d	t																			
RPGX 1204 DP	RPGX 43 DP	12.70	4.76												●			●	●			

CHAMFER CUTTER

CSC

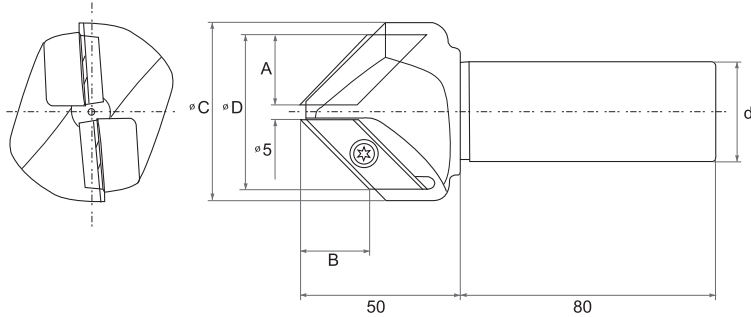


Type	Dimensions (mm)							Insert	Spare parts	
	θ	A	B	∅C	∅D	d			Screw	Wrench
CSC 0503 1R-30	30°	15.5	20.5	40	36.0	32.0	1	XCET 310404ER	SDT050	T-20
CSC 0503 1R-30-A	30°	15.5	20.5	40	36.0	25.4	1			
CSC 0503 1R-30-A-2F	30°	15.5	26.0	47	43.0	25.4	2			
CSC 0503 1R-41-A	41°	20.5	20.5	56	46.0	25.4	2			
CSC 0503 1R-45	45°	22.0	20.5	56	46.0	32.0	2			
CSC 0503 1R-45-A	45°	22.0	20.5	56	46.0	25.4	2			
CSC 0503 1R-60	60°	26.5	15.0	72	55.0	32.0	2			
CSC 0503 1R-60-A	60°	26.5	15.0	72	55.0	25.4	2			

Recommended Cutting Conditions

Work piece	Carbon Steel (S55C) Stainless Steel 250HB ≥ Cast Iron (FC250)	Alloy Steel (SCM440) 300HB ≥ High Alloy Steel (SKD61) 300HB ≥
Feed (mm/tooth)	0.1~0.25	0.1~0.2
rpm	3000(1000 ~7000)	

XCET

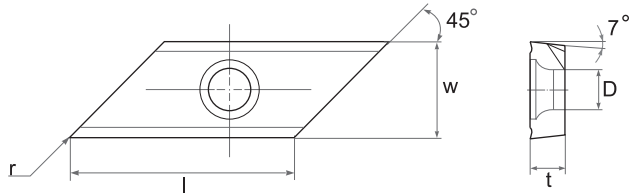


Type	Dimensions (mm)					Grade		
ISO	l	w	t	D	r	TX515	TX520	SCW200
XCET 310404 ER	22.00	12.70	4.50	5.60	0.4		●	●
XCET 310408 ER	22.00	12.70	4.50	5.60	0.8		●	

*SCW200 is a coated carbide grade for P20 range machining.

TECHNICAL DATA


30° Chamfer

Hole Dia ∅d	Dimensions (mm)							
	0.5	1	1.5	2	2.5	3	3.5	4
5	0.8	1.3	1.8	2.3	2.8			
6	1.7	2.2	2.7	3.2	3.7			
6.8	2.4	2.9	3.4	3.9	4.4			
8	3.4	3.9	4.4	4.9	5.4			
8.5	3.8	4.3	4.8	5.3	5.8			
10	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.6
10.2	5.3	5.8	6.3	6.8	7.3	7.8	8.3	8.8
12	6.9	7.4	7.9	8.4	8.9	9.4	9.9	10.4
16	10.3	10.8	11.3	11.8	12.3	12.8	13.3	13.8
17.5	11.6	12.1	12.6	13.1	13.6	14.1	14.6	15.1
20	13.7	14.2	14.7	15.2	15.7	16.2	16.7	17.2
21	14.6	15.1	15.6	16.1	16.6	17.1	17.6	18.1
24	17.2	17.7	18.2	18.7	19.2	19.7	20.2	20.7
30	22.4	22.9	23.4	23.9	24.4	24.9	25.4	
33	24.9	25.4						

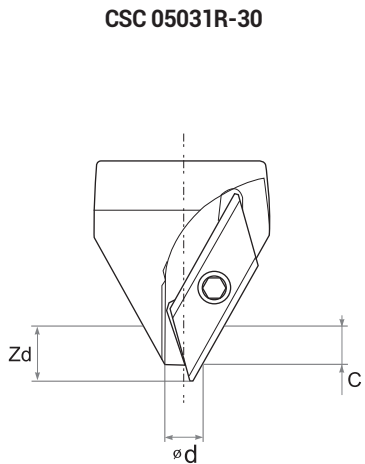

45° Chamfer

Hole Dia ∅d	Dimensions (mm)						
	0.5	1	1.5	2	3	4	5
5	0.7	1.2	1.7	2.2	3.2		
6	1.2	1.7	2.2	2.7	3.7		
6.8	1.6	2.1	2.6	3.1	4.1		
8	2.2	2.7	3.2	3.7	4.7		
8.5	2.4	2.9	3.4	3.9	4.9		
10	3.2	3.7	4.2	4.7	5.7	6.7	7.7
10.2	3.3	3.8	4.3	4.8	5.8	6.8	7.8
12	4.2	4.7	5.2	5.7	6.7	7.7	8.7
14	5.2	5.7	6.2	6.7	7.7	8.7	9.7
16	6.2	6.7	7.2	7.7	8.7	9.7	10.7
17.5	6.9	7.4	7.9	8.4	9.4	10.4	11.4
20	8.2	8.7	9.2	9.7	10.7	11.7	12.7
21	8.7	9.2	9.7	10.2	11.2	12.2	13.2
24	10.2	10.7	11.2	11.7	12.7	13.7	14.7
30	13.2	13.7	14.2	14.7	15.7	16.7	17.7
33	14.7	15.2	15.7	16.2	17.2	18.2	19.2
36	16.2	16.7	17.2	17.7	18.7	19.7	
42	19.2	19.7	20.2				

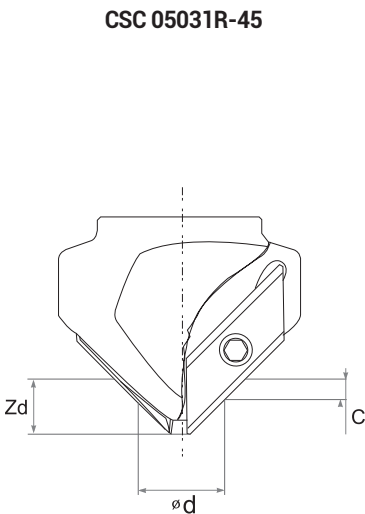


CHAMFER CUTTER

TECHNICAL DATA


60° Chamfer

Hole Dia Ød	Dimensions (mm)						
	0.5	1	1.5	2	2.5	3	3.5
5	0.6	1.1	1.6	2.1			
6	0.9	1.4	1.9	2.4			
6.8	1.1	1.6	2.1	2.6			
8	1.4	1.9	2.4	2.9			
8.5	1.6	2.1	2.6	3.1			
10	2.0	2.5	3.0	3.5	4.0	4.5	5.0
10.2	2.1	2.6	3.1	3.6	4.1	4.6	5.1
12	2.6	3.1	3.6	4.1	4.6	5.1	5.6
16	3.7	4.2	4.7	5.2	5.7	6.2	6.7
17.5	4.2	4.7	5.2	5.7	6.2	6.7	7.2
20	4.9	5.4	5.9	6.4	6.9	7.4	7.9
21	5.2	5.7	6.2	6.7	7.2	7.7	8.2
24	6.1	6.6	7.1	7.6	8.1	8.6	9.1
30	7.8	8.3	8.8	9.3	9.8	10.3	10.8
33	8.7	9.2	9.7	10.2	10.7	11.2	11.7
36	9.5	10.0	10.5	11.0	11.5	12.0	12.5
38	10.1	10.6	11.1	11.6	12.1	12.6	13.1
42	11.2	11.7	12.2	12.7	13.2	13.7	14.2
46	12.4	12.9	13.4	13.9	14.4		
48	13.0	13.5	14.0	14.5			
52	14.1						

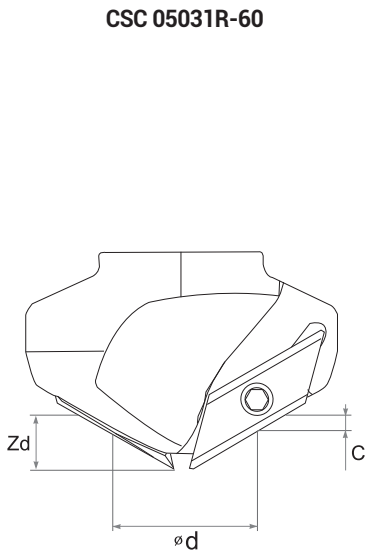


ALUMINUM CUTTER

HPA - I

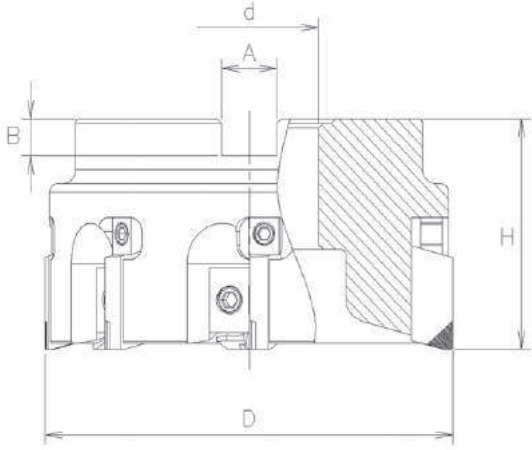

Type	Dimensions (mm)						Weight (kg)	Insert	Arbor
	ØD	Ød	A	B	H				
HPA 025R-I09	63	22	10	6	50	6	0.5	HPA-I09	FMA 22
HPA 03R-I09	80	25.4	9.5	6	50	8	0.7		FMA 25.4
HPA 04R-I09	100	31.75	12.7	8	63	10	1.4		FMA 31.75
HPA 05R-I09	125	38.1	15.9	10	63	12	1.8		FMA 38.1
HPA 06R-I09	160	50.8	19.05	11	63	14	2.4		FMA 50.8
HPA 08R-I09	200	47.625	25.4	14	63	16	3.5		FMA 47.625
HPA 10R-I09	250	47.625	25.4	14	63	18	4.8		FMA 47.625


COMPONENT

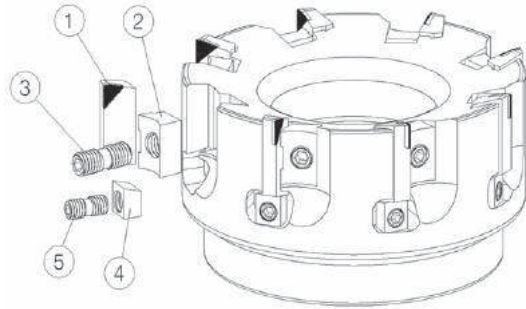

Spare parts				
① Insert	② Wedge	③ Wedge Screw	④ Adjust Wedge	⑤ Adjust Wedge Screw
HPA-I09	DT-ST01	WS6-16	DT-ST02	WS5-11


ALUMINUM CUTTER

HPA - H

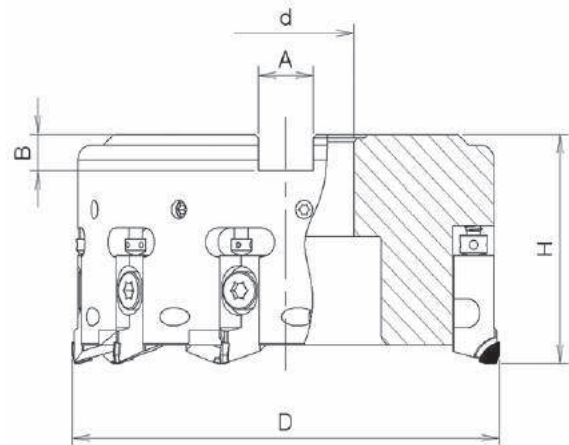

Type	Dimensions (mm)						Weight (kg)	Insert	Arbor
	ØD	Ød	A	B	H				
HPA 02R-H10	50	16	8	6.2	50	4	0.4	ROUGH HPA 10CA-R WIPER HPA 10CA-W	FMA 16
HPA 025R-H10	63	22	10	6	50	4	0.5		FMA 22
HPA 03R-H10	80	25.4	9.5	6	50	6	0.7		FMA 25.4
HPA 04R-H10	100	31.75	12.7	8	50	7	2.2		FMA 31.75
HPA 05R-H10	125	38.1	15.9	10	63	10	1.4		FMA 38.1
HPA 06R-H10	160	50.8	19.05	11	63	12	2.5		FMA 50.8
HPA 08R-H10	200	47.625	25.4	14	63	14	3.5		FMA 47.625
HPA 10R-H10	250	47.625	25.4	14	63	18	4.9		FMA 47.625


COMPONENT

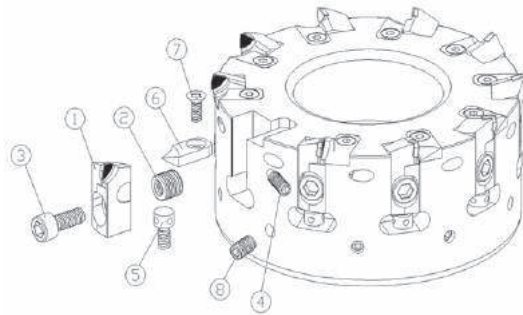

Spare parts				
① Cartridge	① Cartridge	② Double Screw	③ Clamp Screw	④ Side Clamp Screw
HPA 10CA-R	HPA 10CA-W	H108	M6×15	M6×16
⑤ Adjust Screw	⑥ Chip Cover	⑦ Chip Cover Screw	⑧ Balancing Screw	
AJM 5F	HC-R/L	M4×10	M6×10	


ALUMINUM CUTTER

HPA - M

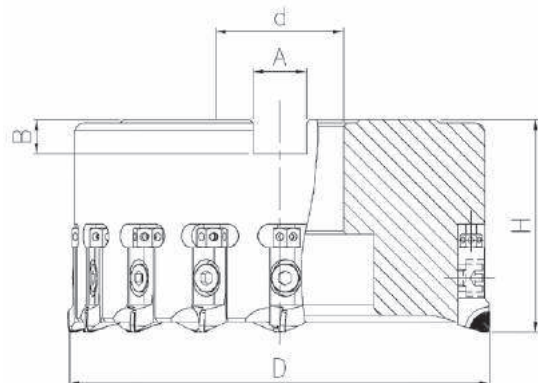

Type	Dimensions (mm)						Weight (kg)	Insert	Arbor
	ØD	Ød	A	B	H				
HPA 03R-M10	80	25.4	9.5	6	50	10	0.8	ROUGH HPA 08CA-R WIPER HPA 08CA-W	FMA 25.4
HPA 04R-M10	100	31.75	12.7	8	50	12	1.2		FMA 31.75
HPA 05R-M10	125	38.1	15.9	10	63	14	2.2		FMA 38.1
HPA 06R-M10	160	50.8	19.05	11	63	18	2.8		FMA 50.8
HPA 08R-M10	200	47.625	25.4	14	63	24	4.5		FMA 47.625
HPA 10R-M10	250	47.625	25.4	14	63	30	7		FMA 47.625


COMPONENT

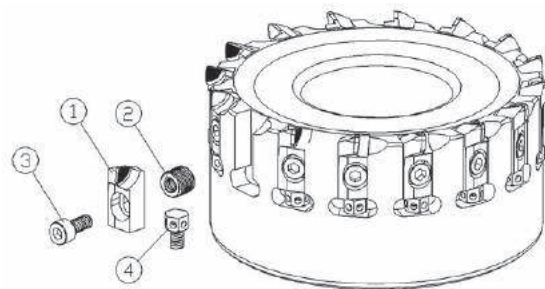


Spare parts				
① Cartridge	① Cartridge	② Double Screw	③ Clamp Screw	④ Adjust Screw
HPA 08CA-R	HPA 08CA-W	H107	M5×12	AJM 5F

ALUMINUM CUTTER

ARBOR

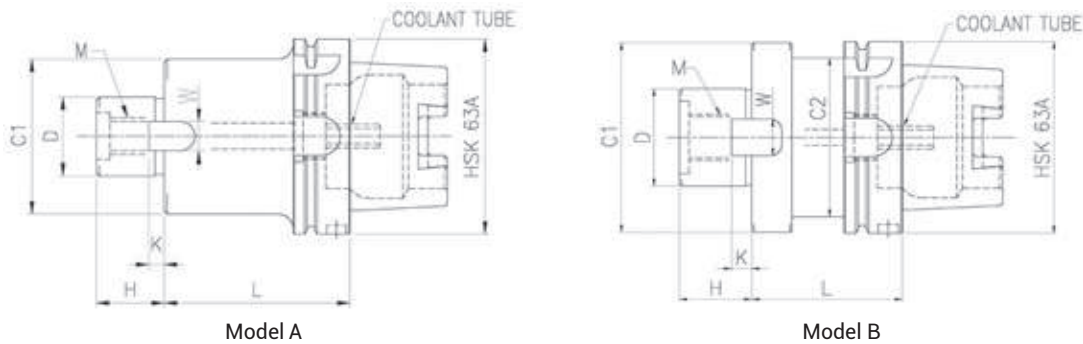


Type	Dimensions (mm)							M	Weight (kg)	Model	Cutter
	D	L	H	C ₁	C ₂	W	K				
HSK 63A-FMA22-50	22	50	19	50	50	9.5	5	M10	1.2	A	HPA 025R
HSK 63A-FMA25.4-60	25.4	60	22	50	50	9.5	5	M12	1.3	A	HPA 03R
HSK 63A-FMA25.4-90	25.4	90	22	50	50	9.5	5	M12	1.9	A	HPA 03R
HSK 63A-FMA25.4-120	25.4	120	22	50	50	9.5	5	M12	2.3	A	HPA 03R
HSK 63A-FMA31.75-60	31.75	60	30	60	53	12.7	7	M16	1.7	B	HPA 04R
HSK 63A-FMA31.75-90	31.75	90	30	60	53	12.7	7	M16	2.5	B	HPA 04R
HSK 63A-FMA31.75-120	31.75	120	30	60	53	12.7	7	M16	3.3	B	HPA 04R
HSK 63A-FMA38.1-60	38.1	60	34	80	53	15.9	9	M20	2.1	B	HPA 05R
HSK 63A-FMA38.1-90	38.1	90	34	80	53	15.9	9	M20	3	B	HPA 05R
HSK 63A-FMA38.1-120	38.1	120	34	80	53	15.9	9	M20	4.4	B	HPA 05R

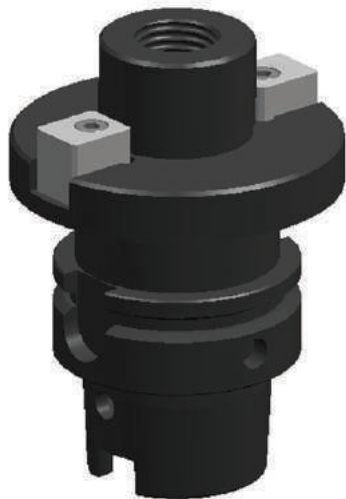

ALUMINUM CUTTER


ARBOR

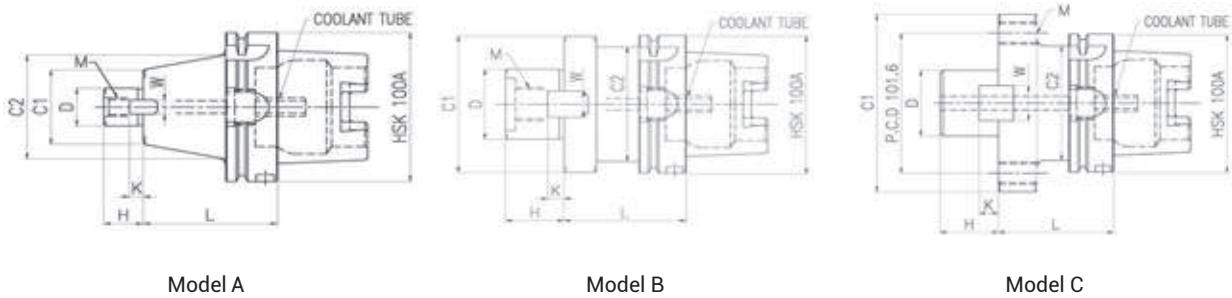

Type	Dimensions (mm)							M	Weight (kg)	Model	Cutter
	D	L	H	C ₁	C ₂	W	K				
HSK 100A-FMA25.4-75	25.4	75	22	50	70	9.5	5	M12	3.2	A	HPA 03R
HSK 100A-FMA25.4-105	25.4	105	22	50	70	9.5	5	M12	3.9	A	HPA 03R
HSK 100A-FMA25.4-135	25.4	135	22	50	70	9.5	5	M12	4.6	A	HPA 03R
HSK 100A-FMA31.75-75	31.75	75	30	60	70	12.7	7	M16	3.5	A	HPA 04R
HSK 100A-FMA31.75-105	31.75	105	30	60	70	12.7	7	M16	4.3	A	HPA 04R
HSK 100A-FMA31.75-135	31.75	135	30	60	70	12.7	7	M16	5.1	A	HPA 04R
HSK 100A-FMA38.1-75	38.1	75	34	80	80	15.9	9	M20	4.4	A	HPA 05R
HSK 100A-FMA38.1-105	38.1	105	34	80	80	15.9	9	M20	5.7	A	HPA 05R
HSK 100A-FMA38.1-135	38.1	135	34	80	80	15.9	9	M20	7.0	A	HPA 05R
HSK 100A-FMA50.8-75	50.8	75	36	99	83	19.05	10	M24	5.7	B	HPA 06R
HSK 100A-FMA50.8-105	50.8	105	36	99	83	19.05	10	M24	7.7	B	HPA 06R
HSK 100A-FMA50.8-135	50.8	135	36	99	83	19.05	10	M24	9.7	B	HPA 06R
HSK 100A-FMA47.625-75	47.625	75	38	128.57	83	25.4	12.5	M16		C	HPA 08R

ALUMINUM CUTTER

MOUNT'G BOLT

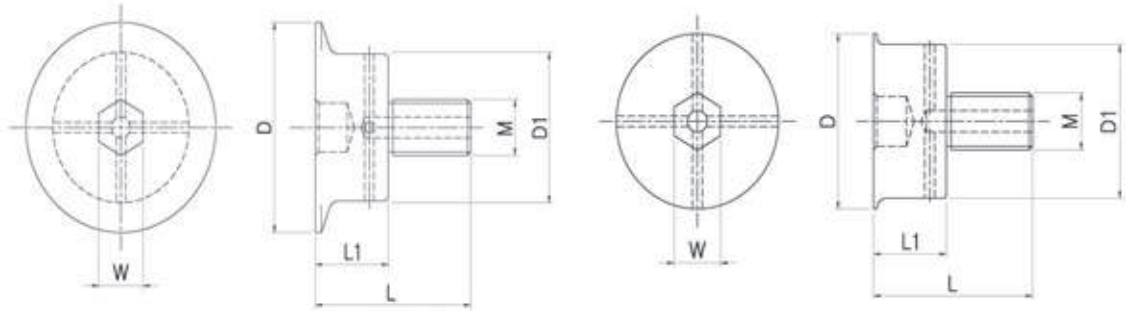


Model A

Model B

Type	Dimensions (mm)					M	Model	Cutter	Arbor
	D	D ₁	L	L ₁	W				
ICM-M10	28	16.5	41	11	8	M10	A	HPA 025R-I09	FMA 22
HCM-M10	25	18	43	10	8	M10	B	HPA 025R-H10	
ICM-M12	44	26	42	15.4	10	M12	A	HPA 03R-I09	FMA 25.4
HCM-M12	40	34	47.5	25.5	12	M12	B	HPA 03R-H10	
ICM-M16	60	43	49	23	14	M16	A	HPA 04R-I09	FMA 31.75
HCM-M16	49	43	48	22	14	M16	B	HPA 04R-H10	
ICM-M20	79	53.6	58.8	27.8	14	M20	A	HPA 05R-I09	FMA 38.1
HCM-M20	60	54	63	32	14	M20	B	HPA 05R-H10	
ICM-M24	110	65	60	22	17	M24	A	HPA 06R-I09	FMA 50.8
HCM-M24	71	65	60	22	17	M24	B	HPA 06R-H10	

ALUMINUM CUTTER

QCB - I

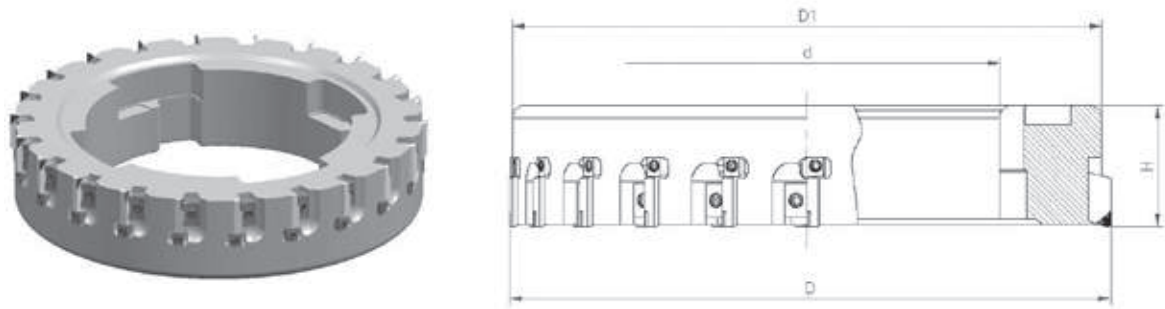


Type	Dimensions (mm)					Insert
	D	D ₁	d	H		
QCB D200-I09	200	195	120.02	50	18	HPA-I09
QCB D250-I09	250	245	160.02	50	22	
QCB D315-I09	315	310	215.02	50	28	

Spare parts				
① Insert	② Wedge	③ Wedge Screw	④ Adjust Wedge	⑤ Adjust Wedge Screw
HPA-I09	DT-ST01	WS6-16	DT-ST02	WS5-11

ALUMINUM CUTTER

QCB - H

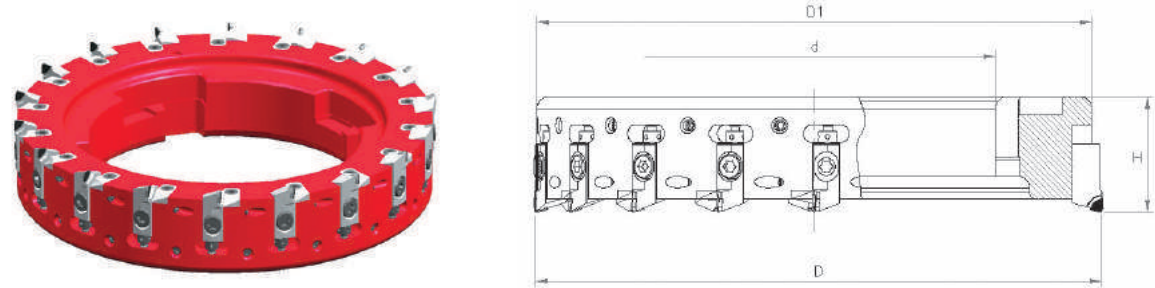


Type	Dimensions (mm)					Insert
	D	D ₁	d	H		
QCB D200-H10	200	195	120.02	50	14	HPA 10CA-R HPA 10CA-W
QCB D250-H10	250	245	160.02	50	18	
QCB D315-H10	315	310	215.02	50	22	

Spare parts				
① Cartridge	① Cartridge	② Double Screw	③ Clamp Screw	④ Side Clamp Screw
HPA 10CA-R	HPA 10CA-W	H108	M6×15	M6×16
⑤ Adjust Screw	⑥ Chip Cover	⑦ Chip Cover Screw	⑧ Balancing Screw	
AJM 5F	HC-R/L	M4×10	M6×10	

ALUMINUM CUTTER

ARBOR


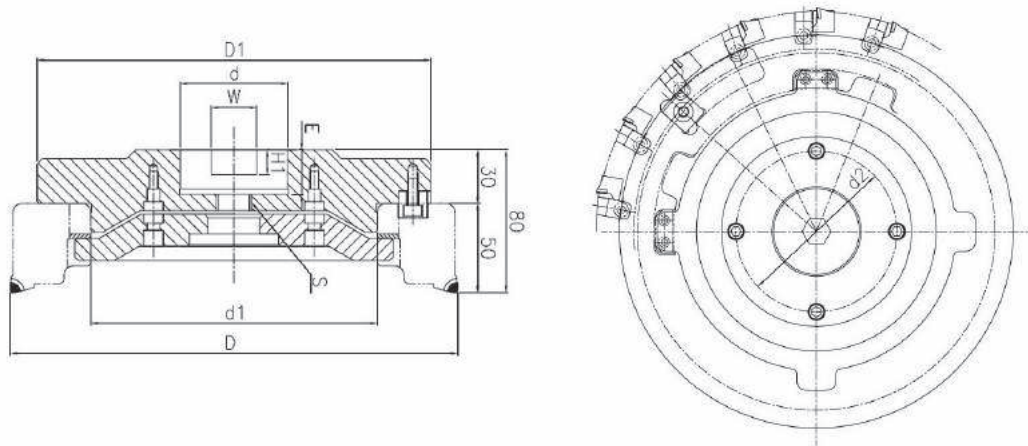


Type	Dimensions (mm)								Center Bolt
	D	D ₁	d	d ₁	W	H ₁	S	E	
QCBA-D200	200	195	47.625	119.97	25.4	14	M20	25	TMBA-M20
QCBA-D250	250	245	60	159.97	25.4	14	M20	25	
QCBA-D315	315	310	60	214.97	25.4	14	M20	25	

SPECIAL TOOLS

E-MOBILITY


MOTOR HOUSING (BORING)

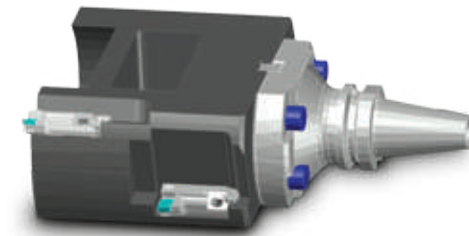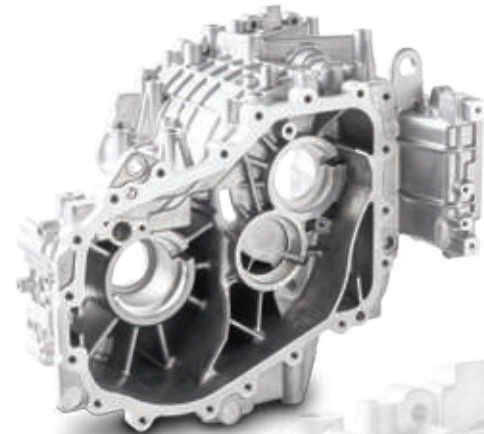

HIGH PRECISION BORING TOOL

- Micro cartridge design
- Light weight design
- PCD equipped ISO inserts (CCGW 1204...)

BATTERY HOUSING (TOP MILLING)

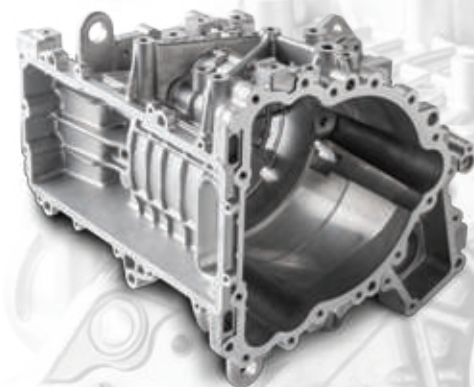

PCD FACE MILLING CUTTER

- PCD Cartridge Type
- Good Surface Roughness
- Light weight design
- Simple handling
- Easy handling
- Very high tool lives

CBN BALL CUTTER / END MILL

SPHERICAL CAGE



OUTER RACE




INNER RACE



CBN BALL CUTTER



CARBIDE ENDMILL

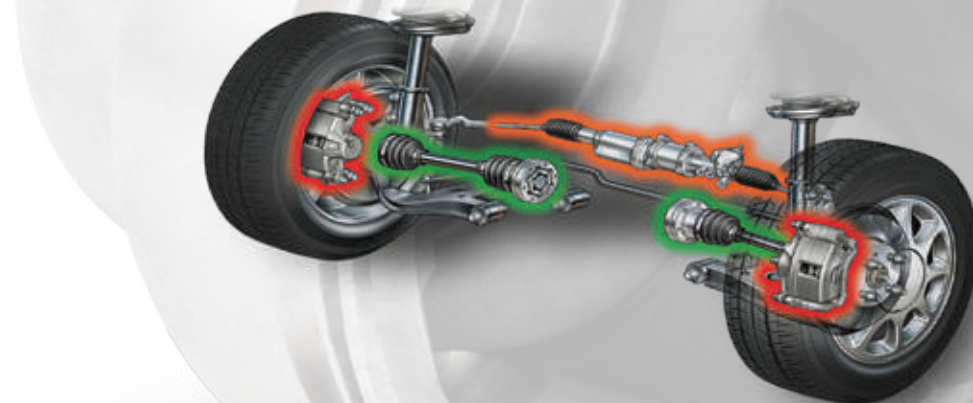

MATERIAL
CF53



MATERIAL
16MnCr5 or 25MnCr5



MATERIAL
CF53

SPECIAL TOOLS

CYLINDER BLOCK




SPECIAL TOOLS

CYLINDER BLOCK



• REAR FACE MILLING CUTTER

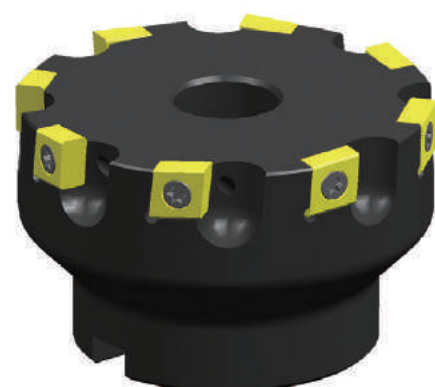

• FACE MOUNTING BOSSES
MILLING CUTTER




• OIL MAIN
CHANNEL
DRILL




• FACE HOLE
TRANSMISSION
DRILL



• SLOT SPEED SENSOR
ENDMILL

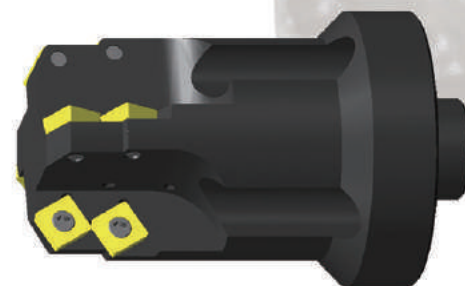


• CUT OUT STARTER
BORING TOOL



• STOP FACE SEALING CRANK
SHAFT BORING TOOL




• CRANK HONING HOLDER

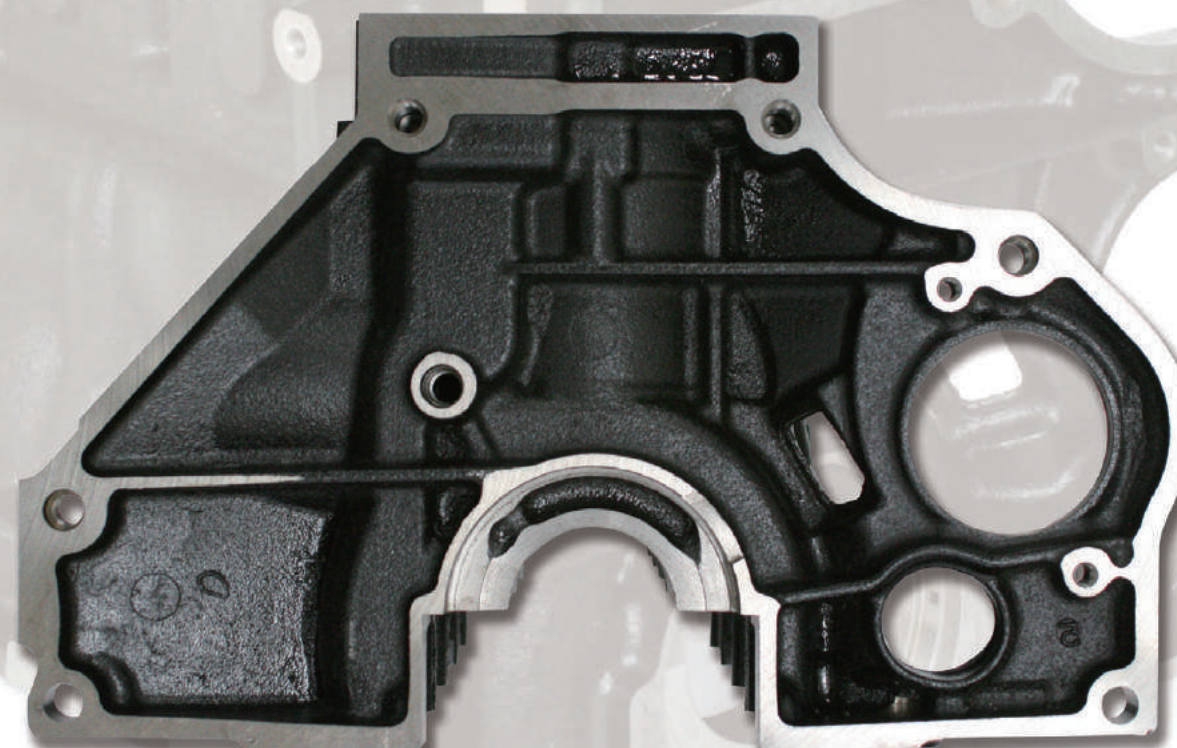


SPECIAL TOOLS

CYLINDER HEAD

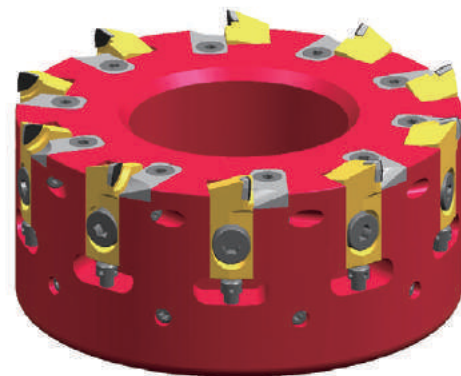

• EXHAUST FACE MILLING CUTTER

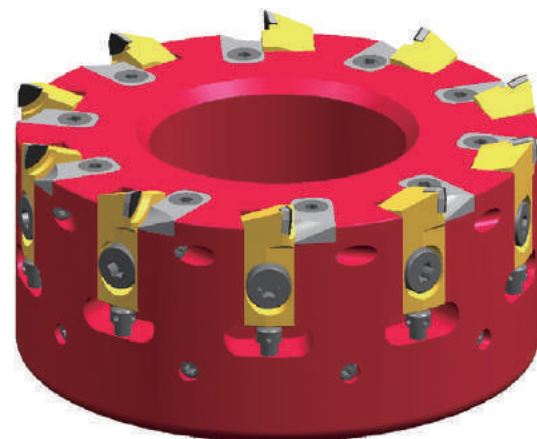

• TOP FACE MILLING CUTTER



• SEAT LIFTER-VALVE IN & EX BORING TOOL




• SEAT LIFTER-VALVE IN & EX BORING TOOL



• SPARK PLUG HOLE REAMER



• VALVE GUIDE SEAT LIFTER VALVE BORING TOOL

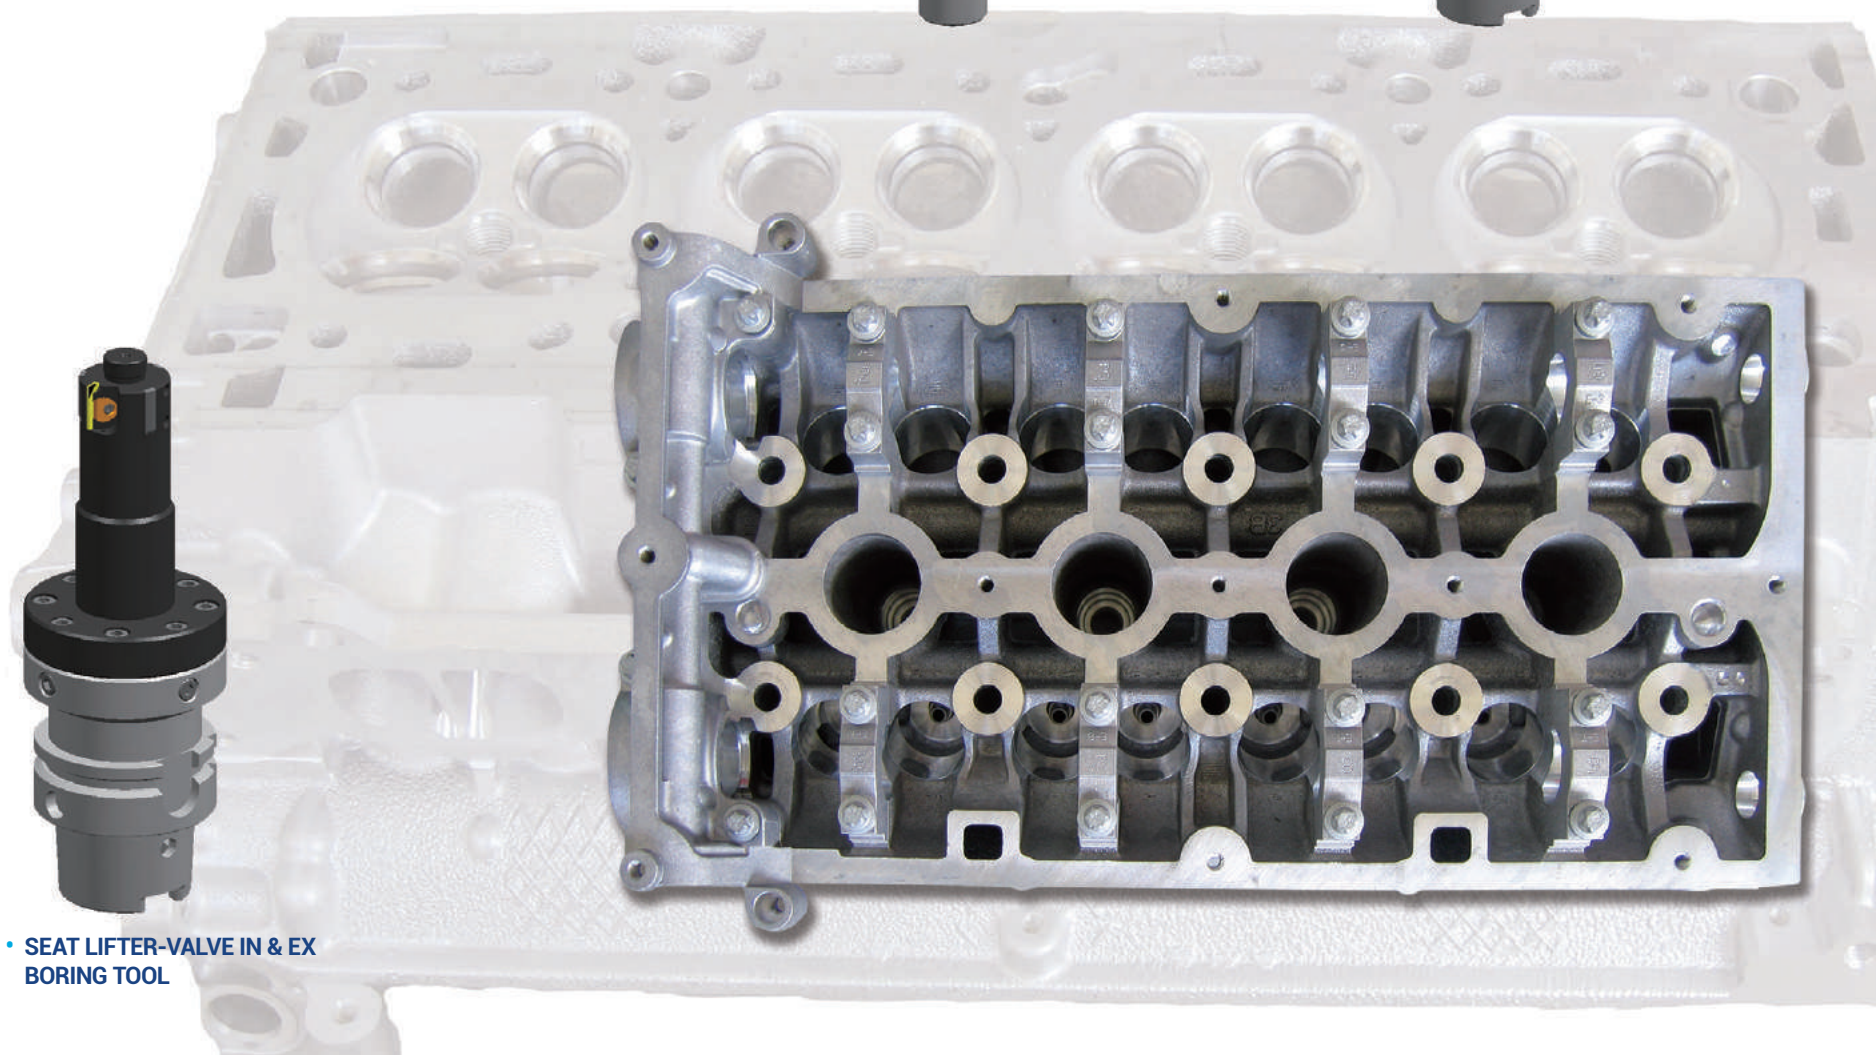


SPECIAL TOOLS

CYLINDER HEAD



• CAMSHAFT BEARING CHAMFER

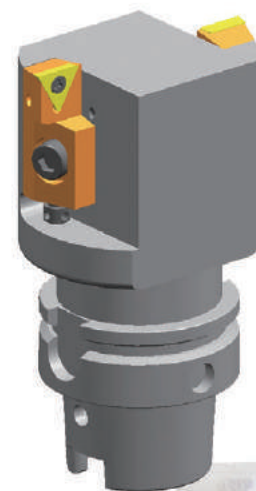


• VALVE SEAT GUIDE BORING TOOL



• CAMSHAFT BEARING FINISH BORING TOOL



• VALVE SEAT GUIDE FINISH BORING TOOL

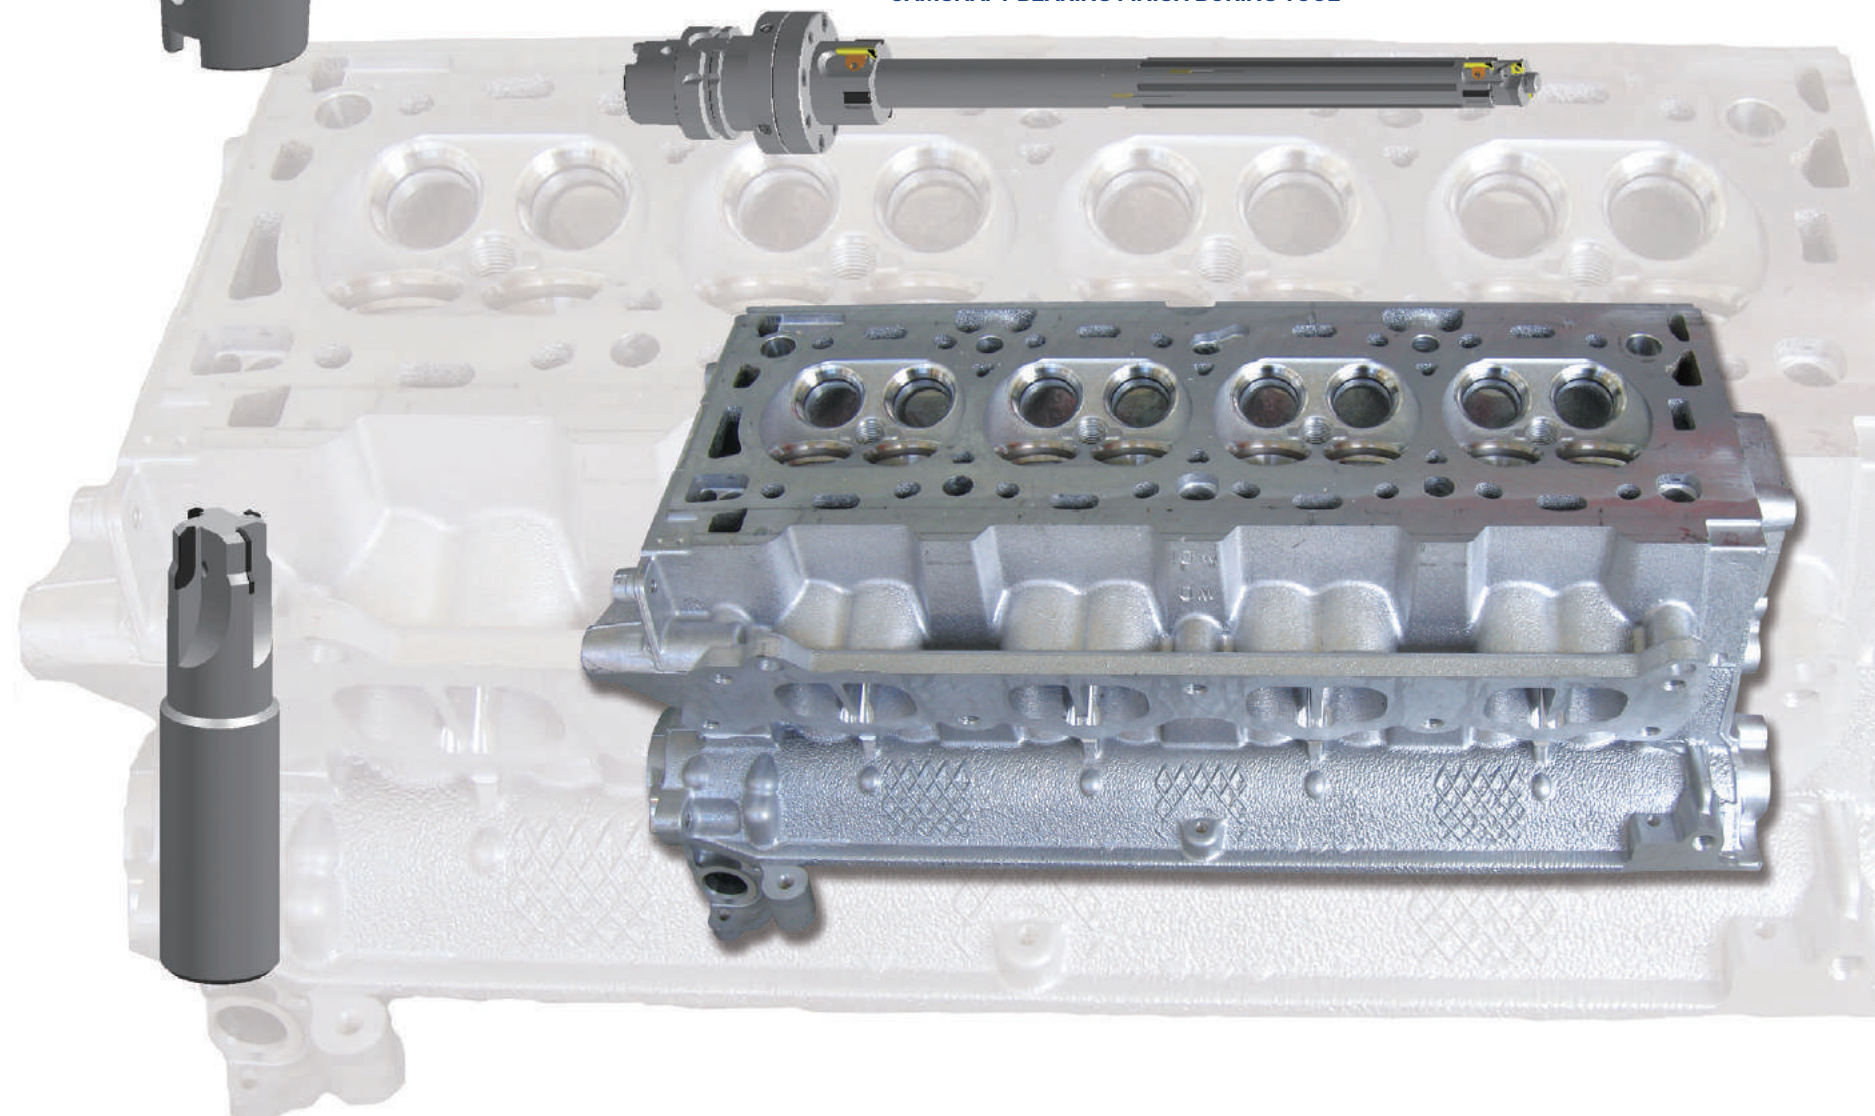


SPECIAL TOOLS


T/MISSION CASE




• GEAR SHIFT SHAFT LOCK HOLE BORING TOOL

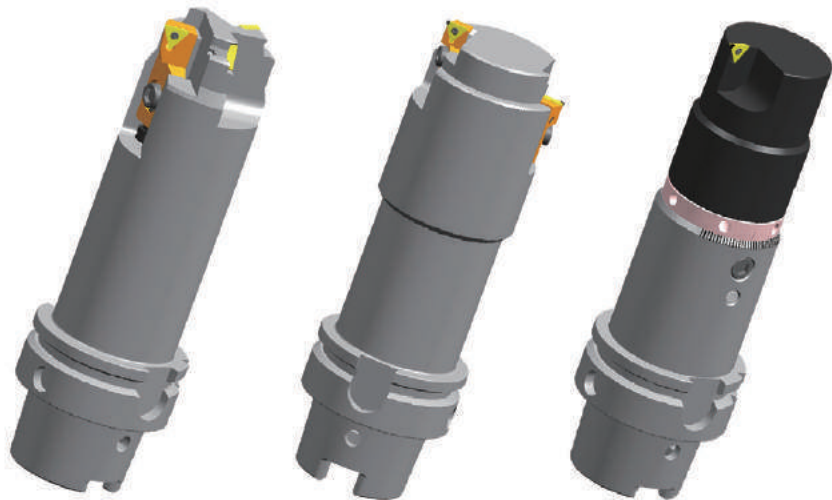


• DIFT HOUSING & OIL SEAL HOLE BORING TOOL

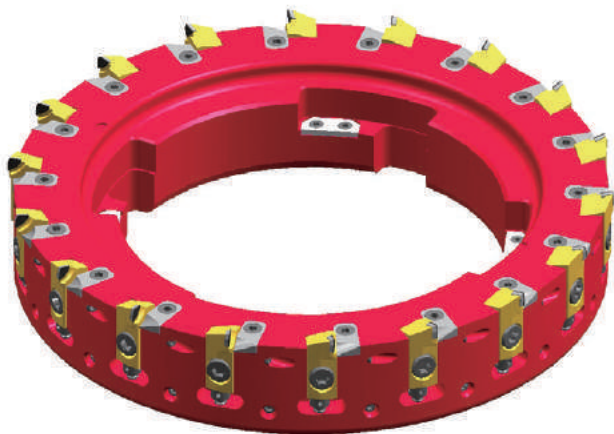

• CLUTCH RELEASE LEVER HOLE REAMER

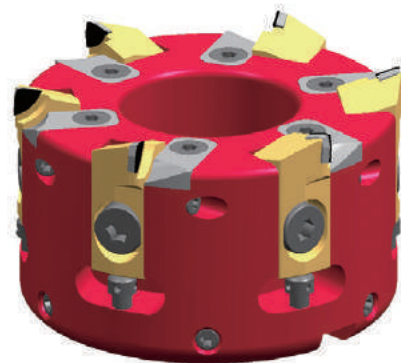

• CPS COVER ATTACHED FACE MILLING CUTTER


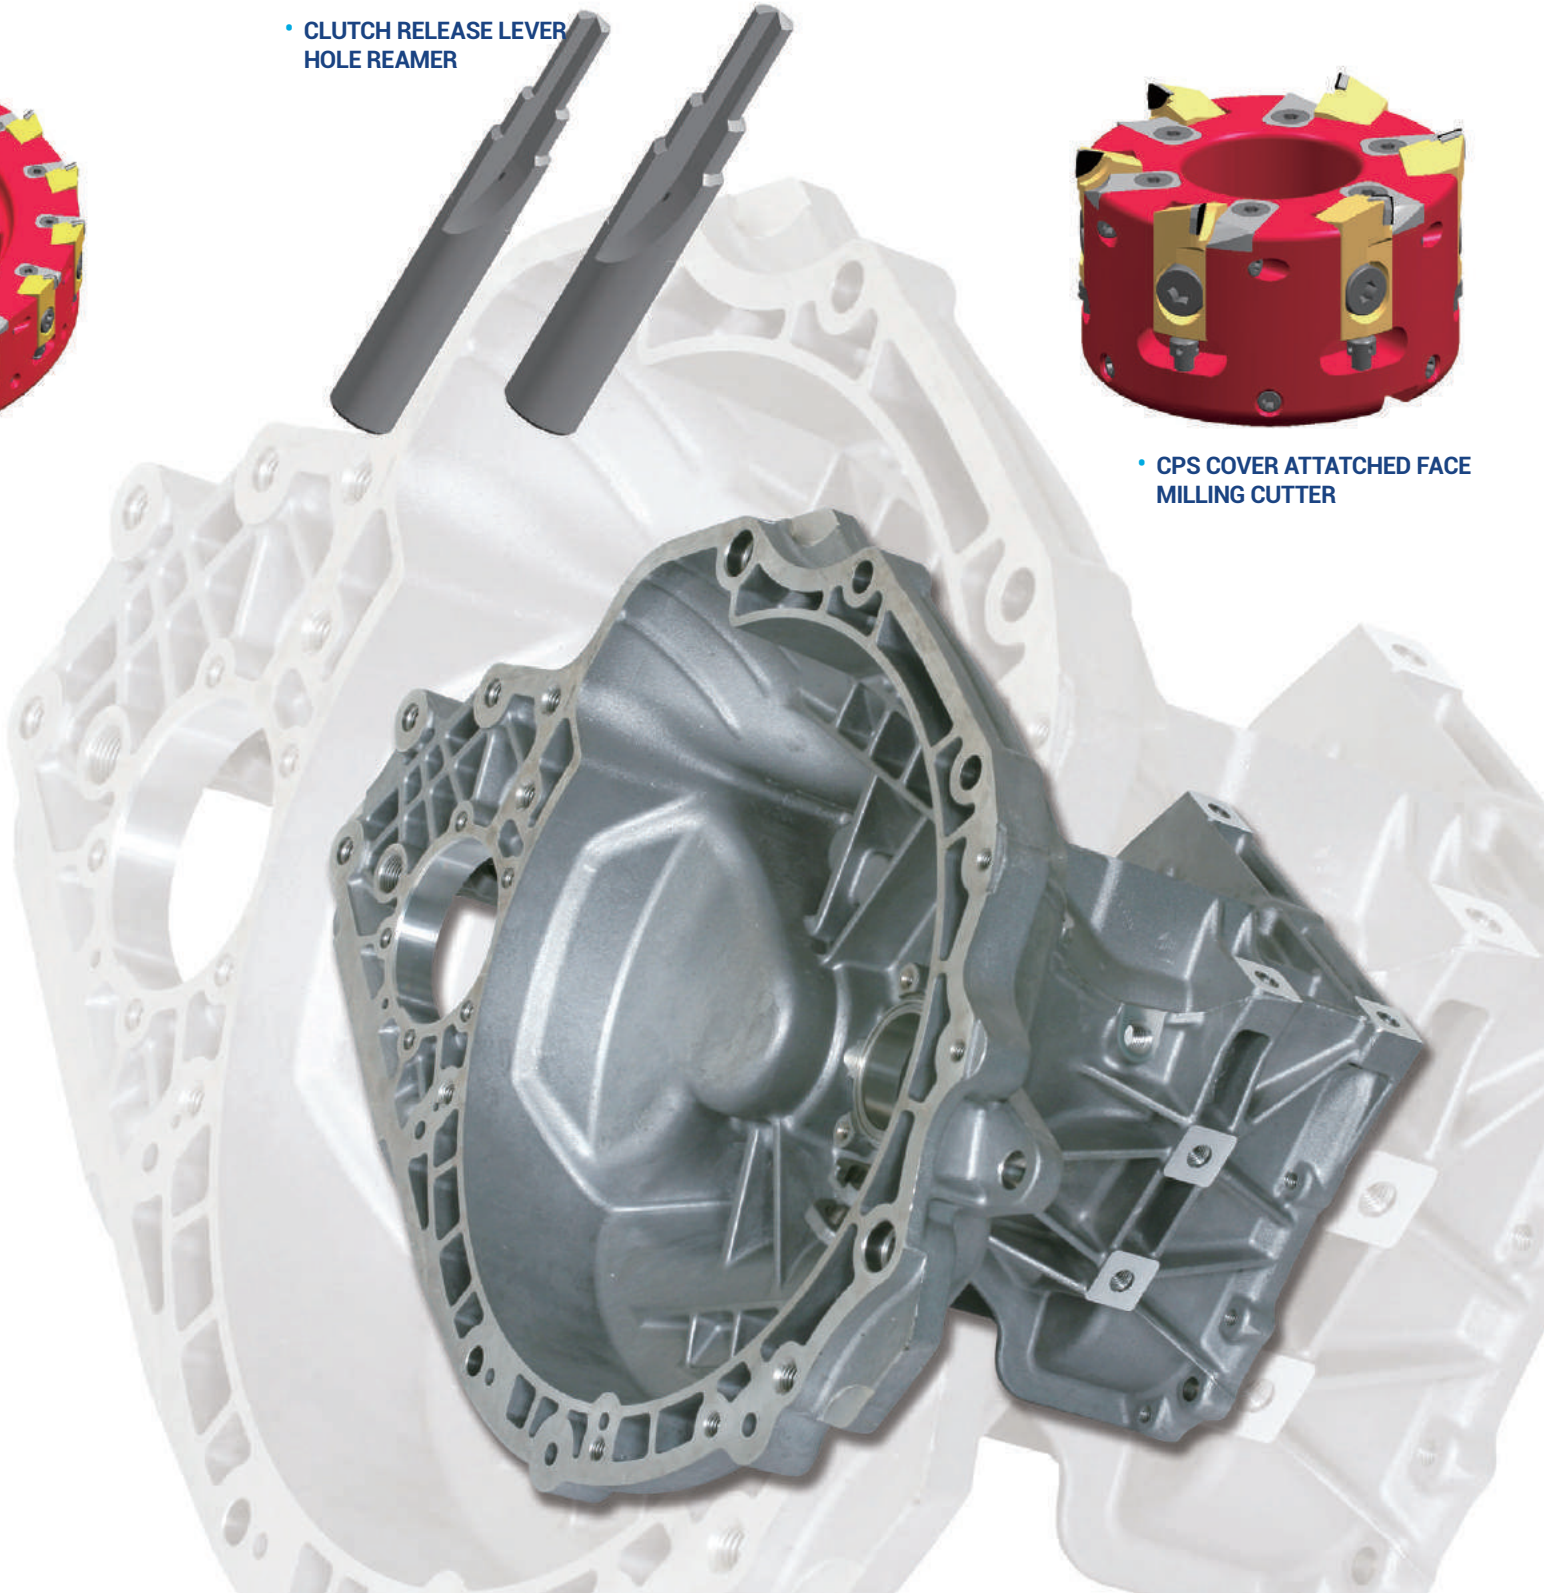


SPECIAL TOOLS


T/MISSION CASE



• COUNTER SHAFT BRG. HOLE BORING TOOL

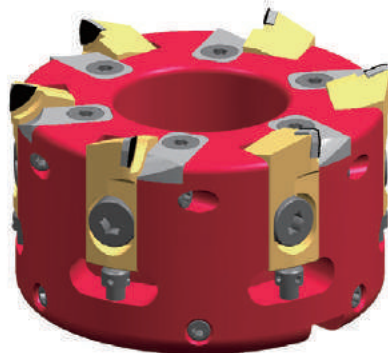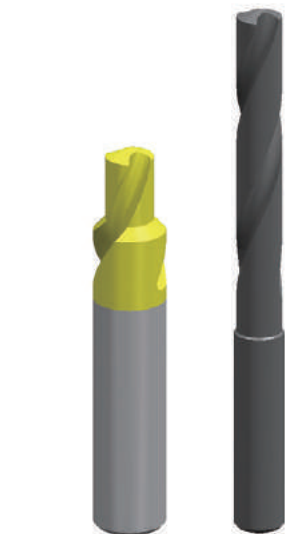

• ENGINE MOUNTING HOLE BORING TOOL

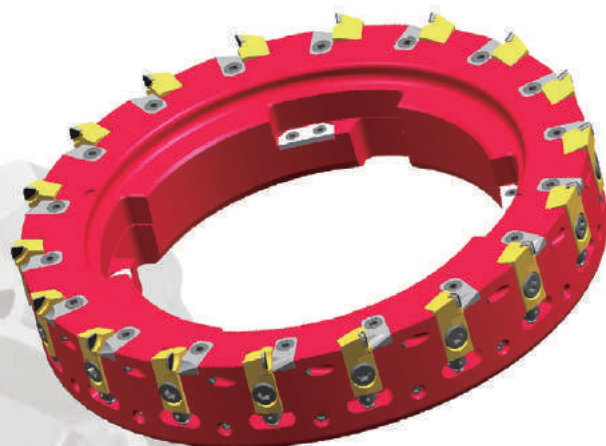

SPECIAL TOOLS

BRAKE HOUSING





BRAKE CARRIER



SPECIAL TOOLS

K N U C K L E

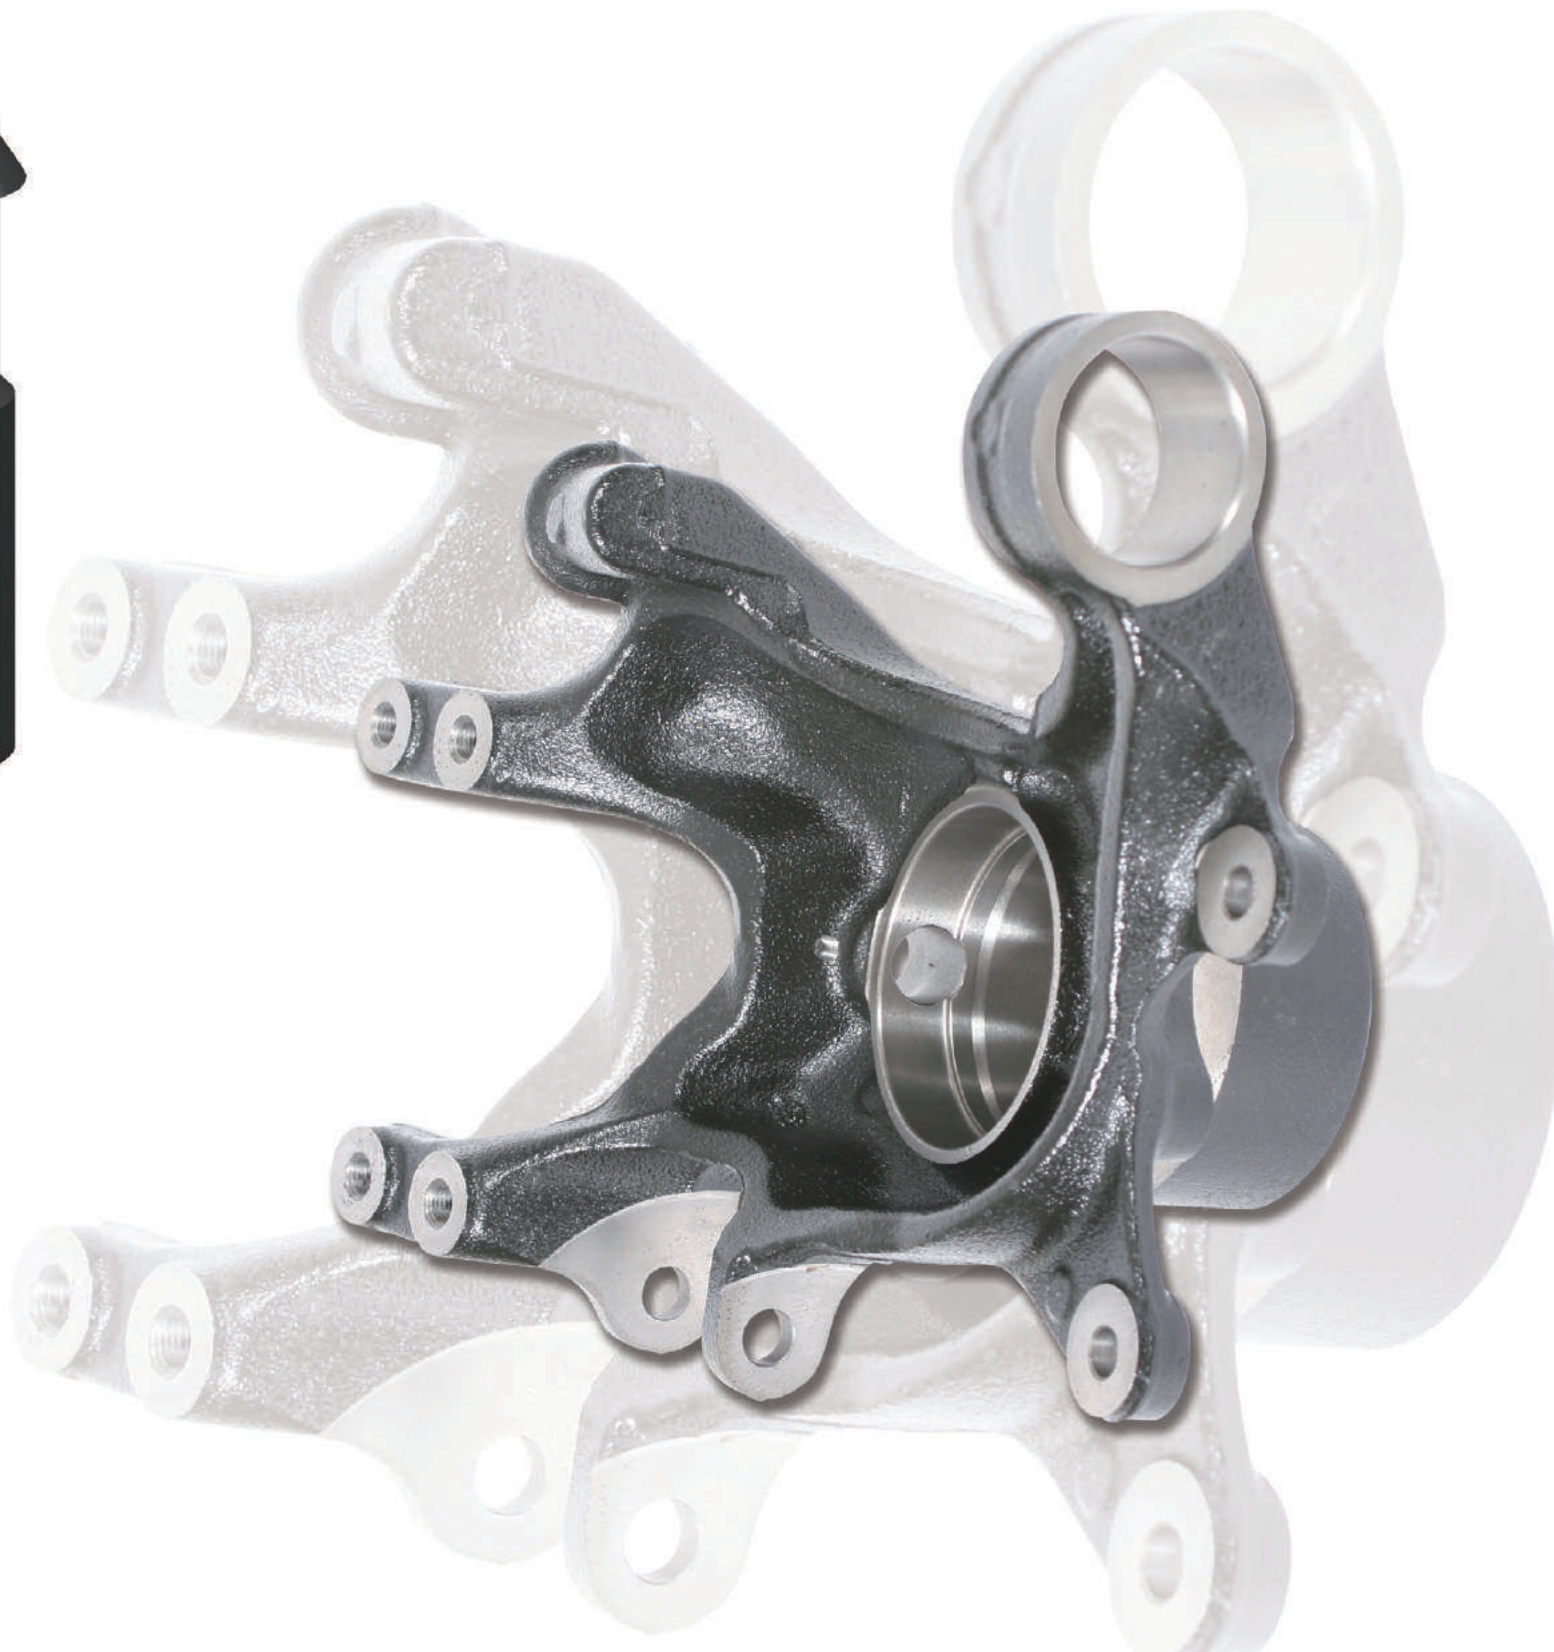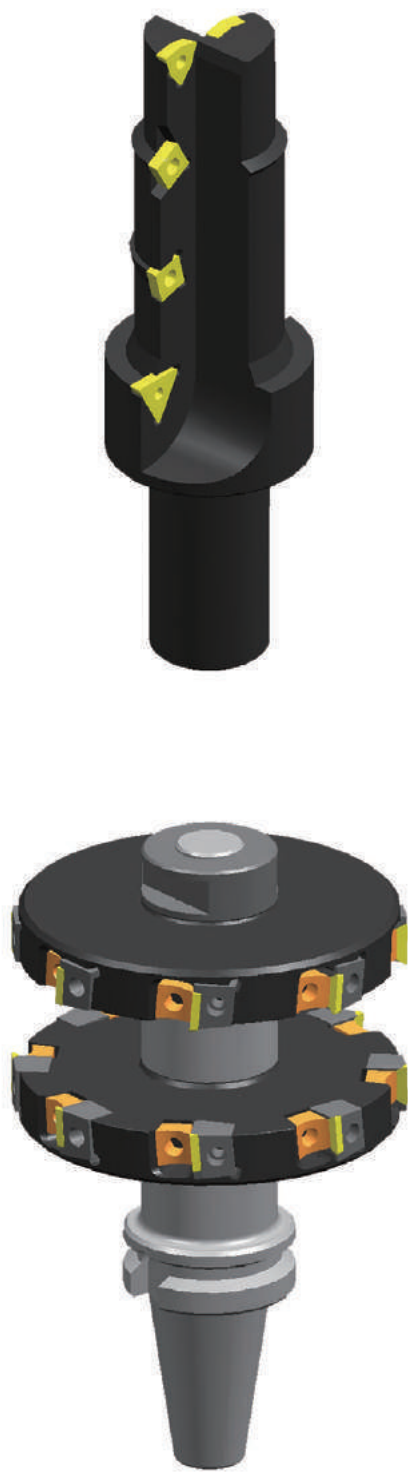

SPECIAL TOOLS

CONNECTING ROD



SPECIAL TOOLS

UF T-Slot Cutters (Solid Carbide)


T-slot cutter generally applies to edge grooving, Keyway grooving, T-slot grooving.



Dia. 2-12mm / 250mm
Note : Please inquire for special size



UF indexbale T-slot cutter : Same shank fits but various carbide inserts

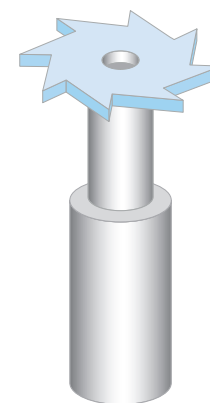


Solid carbide T-slots, the one drawback those cutters have in common is each individual cutter has their own size and single application, users must throw away the entire cutter when it was damaged.

For example, someday when they get a new project needs a cutter in Ø20mm with shack size Ø16mm; if none of their existing cutters fit the requirement, they have no choice but to buy an all-new cutter.


Therefore, we offer customization options as well, such as, T-Slot inserts with special corner radius, chamfers .. and so on.

Application

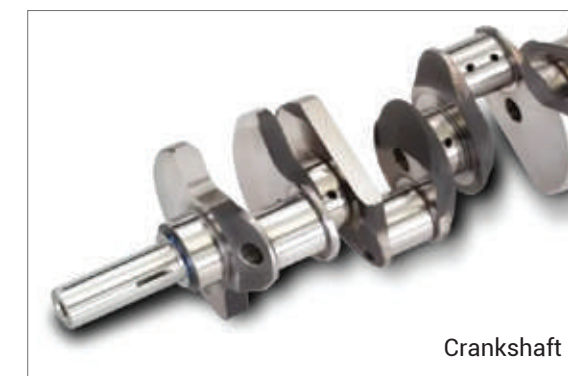


ENDMILL CUTTER

ARE01




ARE02



Type		Dimensions (mm)				
		ØD	Ød	L ₁	L	
ARE01	ARE01-016-120-AP11-2F	16	16	25	120	2
	ARE01-016-180-AP11-2F	16	16	30	180	2
	ARE01-020-120-AP11-2F	20	20	30	120	2
	ARE01-020-180-AP11-2F	20	20	30	180	2
	ARE01-025-150-AP11-3F	25	25	35	150	3
	ARE01-025-200-AP11-3F	25	25	35	200	3
	ARE01-025-150-AP16-2F	25	25	35	150	2
	ARE01-025-200-AP16-2F	25	25	35	200	2
	ARE01-032-160-AP16-3F	32	32	40	160	3
ARE02	ARE01-032-200-AP16-3F	32	32	40	200	3
	ARE02-050-A22-AP16-5F	50	22	-	40	5
	ARE02-063-A22-AP16-6F	63	22	-	50	6

Diameter ØD	Insert	Screw	Wrench	
Ø16~Ø25	AP11	DTKA 02555	T-7	-
Ø25~Ø63	AP16	DTKA 04100	-	T-15

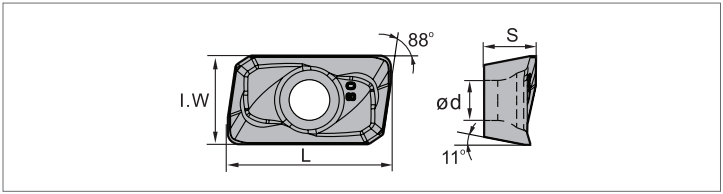


SPG200

- PVD Coating
- P20, M20

Insert shape	Type	Dimensions (mm)					Grade
		L	I.W	S	d	r	SPG200
	APMT1135PDR	11.25	6.2	3.5	2.8	0.8	
	APMT160408PDER	17.25	9.25	4.76	4.4	0.8	

● Stock

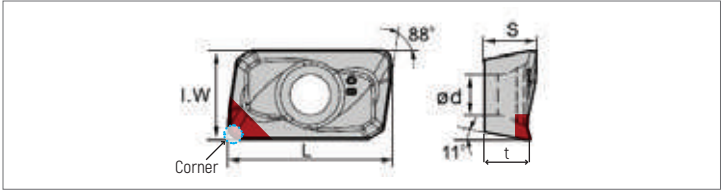


Insert shape	Type	Dimensions (mm)					Grade
		L	I.W	S	d	r	SPD4000
	APMT1135PDR	11.25	6.2	3.5	2.8	0.8	
	APMT160408PDER	17.25	9.25	4.76	4.4	0.8	

HIGH FEED CUTTER

HFC01



S type insert, straight shank

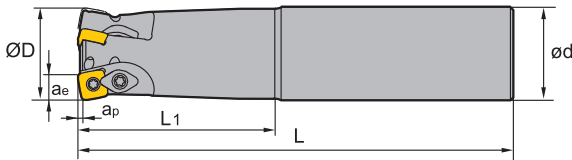


Type		Dimensions (mm)				
		ØD	Ød	L ₁	L	
HFC01	HFC01-33-200-SD12-2F	33	32	50	200	2
	HFC01-33-250-SD12-2F	33	32	50	250	2


HFC01



S type insert, Arbor mounting



Type		Dimensions (mm)				
		ØD	Ød	L ₁	L	
HFC01	HFC01-50-A22-SD12-3F	50	22	-	50	3
	HFC01-63-A22-SD12-4F	63	22	-	50	4



SPG210

- PVD Coating
- P20, M20


Insert shape	Type	Dimensions (mm)				Grade
		B	Re	S ₁	D ₁	SPG210
	SDMT09T312-DM	15°	1.2	3.97	9.525	
	SDMT120412-DM	15°	2.0	4.76	12.7	

● Stock

Tool Type	Insert Screw	Clamp Screw	Clamp	Wrench		
HFC01 □□ -SD12 □□	DTKA 04100	DS 5003-1	DYR 08	T-15	T-20	


FINISH BALL CUTTER

FBC

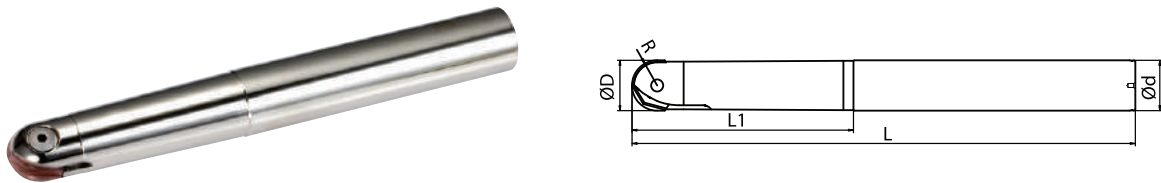

Type		Dimensions (mm)				
		R	ØD	Ød	L ₁	L
FBC	FBC 012-130	6	12	12	50	130
	FBC 012-150	6	12	12	60	150
	FBC 016-150	8	16	16	60	150
	FBC 016-180	8	16	16	80	180
	FBC 020-180	10	20	20	75	180
	FBC 020-220	10	20	20	90	220
	FBC 025-200	12.5	25	25	90	200
	FBC 025-250	12.5	25	25	110	250
	FBC 030-200	15	30	30	90	200
	FBC 030-250	15	30	30	110	250
	FBC 030-300	15	30	30	125	300

Diameter	Screw	Wrench
Ø12	DBF 1210	T-15
Ø16	DBF 1611	T-15
Ø20	DBF 20165	T-20
Ø25	DBF 2520	T-25
Ø30	DBF 3025	L-5

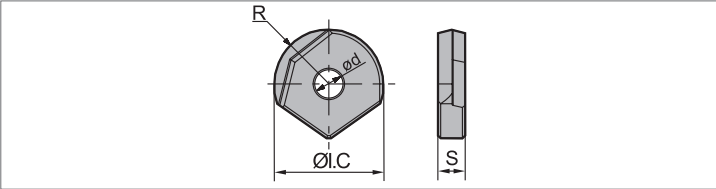

SPG250


- PVD Coating
- P20, M20, K20

Insert shape	Type	Dimensions (mm)					Grade
		R	ØI.C	S	Ød	ØD	SPG250
	DFBI1203-M/F	6	12	3	4	Ø12	●
	DFBI1604-M/F	8	16	4	5	Ø16	●
	DFBI2005-M/F	10	20	5	5	Ø20	●
	DFBI2506-M/F	12.5	25	6	6	Ø25	●
	DFBI3007-M/F	15	30	7	8.25	Ø30	●

● Stock


FACE MILL CUTTER

OMR07

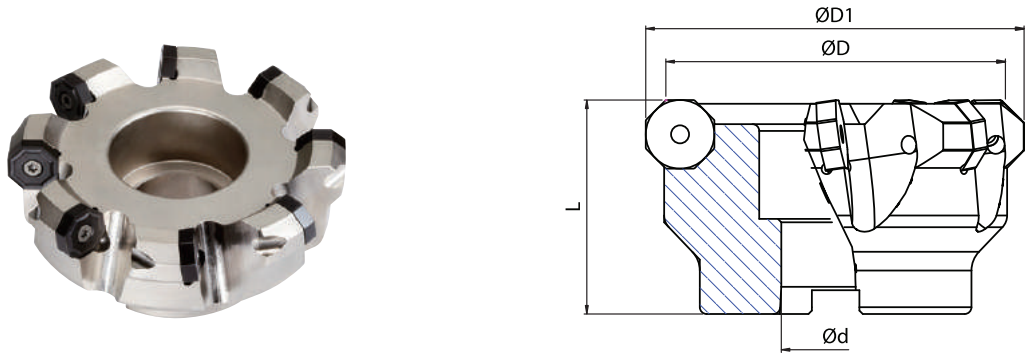

Type		Dimensions (mm)				
		ØD	Ød	L ₁	L	
OMR07	OMR07-080-B27-ON08-06	80	92	27	50	6
	OMR07-100-B32-ON08-07	100	111	32	63	7
	OMR07-125-B40-ON08-08	125	138	40	63	8

Diameter ØD	Insert	Screw	Wrench
Ø63~Ø315	ONHU 08 □□□□ -PF/PM	DTKA512-60	T-20

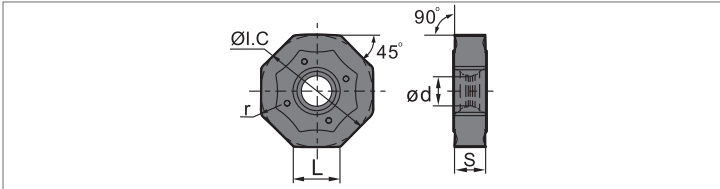

SCK150


- CVD Coating
- K15

Insert shape	Type	Dimensions (mm)					Grade
		L	ØI.C	S	Ød	r	SCK150
	ONHU08T508-PF	8.37	20.2	5.77	5.3	0.83	
	ONHU08T508-PM	8.37	20.2	5.79	5.3	0.83	●

● Stock

INDEXIBLE DRILL


JTR 2xD

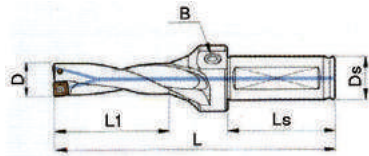

Type	D	L ₁	L	Ds	Ls	B	Insert	Screw	Wrench		
JTR-12520D	12.5	28	105	20	50	PT-1/8	SPGT050204-PM	TSB-20045	TXL-6		
JTR-13020D	13.0	29	106	20	50	PT-1/8					
JTR-13520D	13.5	30	107	20	50	PT-1/8					
JTR-14020D	14.0	31	108	20	50	PT-1/8					
JTR-14520D	14.5	32	109	20	50	PT-1/8					
JTR-15020D	15.0	33	110	20	50	PT-1/8					
JTR-15520D	15.5	34	120	25	56	PT-1/8	SPGT060204-PM	TSB-22052		TXL-6	
JTR-16020D	16.0	35	121	25	56	PT-1/8					
JTR-16520D	16.5	36	122	25	56	PT-1/8					
JTR-17020D	17.0	37	123	25	56	PT-1/8					
JTR-17520D	17.5	38	124	25	56	PT-1/8					
JTR-18020D	18.0	39	125	25	56	PT-1/8					
JTR-18520D	18.5	40	126	25	56	PT-1/8					
JTR-19020D	19.0	41	127	25	56	PT-1/8					
JTR-19520D	19.5	42	128	25	56	PT-1/8					
JTR-20020D	20.0	43	129	25	56	PT-1/8					
JTR-20520D	20.5	44	130	25	56	PT-1/8					
JTR-21020D	21.0	45	131	25	56	PT-1/8					
JTR-21520D	21.5	46	132	25	56	PT-1/8					
JTR-22020D	22.0	47	133	32	60	PT-1/4	SPGT07T308-PM	TSB-25065	TXL-8		
JTR-22520D	22.5	48	143	32	60	PT-1/4					
JTR-23020D	23.0	49	144	32	60	PT-1/4					
JTR-23520D	23.5	50	145	32	60	PT-1/4					
JTR-24020D	24.0	51	146	32	60	PT-1/4					
JTR-24520D	24.5	52	147	32	60	PT-1/4					
JTR-25020D	25.0	53	148	32	60	PT-1/4					
JTR-25520D	25.5	54	149	32	60	PT-1/4					
JTR-26020D	26.0	55	150	32	60	PT-1/4					
JTR-26520D	26.5	56	151	32	60	PT-1/4					
JTR-27020D	27.0	57	152	32	60	PT-1/4					
JTR-27520D	27.5	58	153	32	60	PT-1/4					
JTR-28020D	28.0	59	154	32	60	PT-1/4				SPGT090408-PM	TSB-35090
JTR-28520D	28.5	60	155	32	60	PT-1/4					
JTR-29020D	29.0	61	156	32	60	PT-1/4					
JTR-29520D	29.5	64	159	32	60	PT-1/4					
JTR-30020D	30.0	65	160	32	60	PT-1/4					
JTR-31020D	31.0	67	162	32	60	PT-1/4					
JTR-32020D	32.0	69	164	32	60	PT-1/4					
JTR-33020D	33.0	71	166	32	60	PT-1/4					
JTR-34020D	34.0	73	168	32	70	PT-1/4	SPGT110408-PM	TSB-40100	TXL-15		
JTR-35020D	35.0	75	170	32	70	PT-1/4					
JTR-36020D	36.0	77	172	32	70	PT-1/4					
JTR-37020D	37.0	79	189	40	70	PT-1/4					
JTR-38020D	38.0	81	191	40	70	PT-1/4					
JTR-39020D	39.0	83	193	40	70	PT-1/4					
JTR-40020D	40.0	85	195	40	70	PT-1/4					
JTR-41020D	41.0	87	197	40	70	PT-1/4					
JTR-42020D	42.0	89	199	40	70	PT-1/4	SPGT140512-PM	TSB-50125		TXL-20	
JTR-43020D	43.0	91	201	40	70	PT-1/4					
JTR-44020D	44.0	93	203	40	70	PT-1/4					
JTR-45020D	45.0	95	205	40	70	PT-1/4					
JTR-46020D	46.0	97	207	40	70	PT-1/4					
JTR-47020D	47.0	99	209	40	70	PT-1/4					
JTR-48020D	48.0	101	211	40	70	PT-1/4					
JTR-49020D	49.0	103	213	40	70	PT-1/4					
JTR-50020D	50.0	105	215	40	70	PT-1/4					

INDEXIBLE DRILL


JTR 3xD

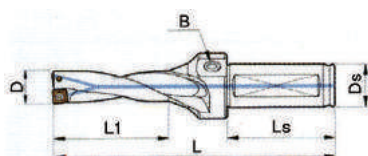

Type	D	L ₁	L	Ds	Ls	B	Insert	Screw	Wrench		
JTR-12530D	12.5	41	118	20	50	PT-1/8	SPGT050204-PM	TSB-20045	TXL-6		
JTR-13030D	13.0	42	119	20	50	PT-1/8					
JTR-13530D	13.5	44	121	20	50	PT-1/8					
JTR-14030D	14.0	45	122	20	50	PT-1/8					
JTR-14530D	14.5	47	124	20	50	PT-1/8					
JTR-15030D	15.0	48	125	20	50	PT-1/8					
JTR-15530D	15.5	50	136	25	56	PT-1/8	SPGT060204-PM	TSB-22052		TXL-6	
JTR-16030D	16.0	51	137	25	56	PT-1/8					
JTR-16530D	16.5	53	139	25	56	PT-1/8					
JTR-17030D	17.0	54	140	25	56	PT-1/8					
JTR-17530D	17.5	56	142	25	56	PT-1/8					
JTR-18030D	18.0	57	143	25	56	PT-1/8					
JTR-18530D	18.5	59	145	25	56	PT-1/8					
JTR-19030D	19.0	60	146	25	56	PT-1/8					
JTR-19530D	19.5	62	148	25	56	PT-1/8					
JTR-20030D	20.0	63	149	25	56	PT-1/8					
JTR-20530D	20.5	65	151	25	56	PT-1/8					
JTR-21030D	21.0	66	152	25	56	PT-1/8					
JTR-21530D	21.5	68	154	25	56	PT-1/8					
JTR-22030D	22.0	69	155	32	60	PT-1/4	SPGT07T308-PM	TSB-25065	TXL-8		
JTR-22530D	22.5	71	166	32	60	PT-1/4					
JTR-23030D	23.0	72	167	32	60	PT-1/4					
JTR-23530D	23.5	74	169	32	60	PT-1/4					
JTR-24030D	24.0	75	170	32	60	PT-1/4					
JTR-24530D	24.5	77	172	32	60	PT-1/4					
JTR-25030D	25.0	78	173	32	60	PT-1/4					
JTR-25530D	25.5	80	175	32	60	PT-1/4					
JTR-26030D	26.0	81	176	32	60	PT-1/4					
JTR-26530D	26.5	83	178	32	60	PT-1/4					
JTR-27030D	27.0	84	179	32	60	PT-1/4					
JTR-27530D	27.5	86	181	32	60	PT-1/4					
JTR-28030D	28.0	87	182	32	60	PT-1/4				SPGT090408-PM	TSB-35090
JTR-28530D	28.5	89	184	32	60	PT-1/4					
JTR-29030D	29.0	90	185	32	60	PT-1/4					
JTR-29530D	29.5	94	189	32	60	PT-1/4					
JTR-30030D	30.0	95	190	32	60	PT-1/4					
JTR-31030D	31.0	98	193	32	60	PT-1/4					
JTR-32030D	32.0	101	196	32	60	PT-1/4					
JTR-33030D	33.0	104	199	32	60	PT-1/4					
JTR-34030D	34.0	107	202	32	70	PT-1/4	SPGT110408-PM	TSB-40100	TXL-15		
JTR-35030D	35.0	110	205	32	70	PT-1/4					
JTR-36030D	36.0	113	208	32	70	PT-1/4					
JTR-37030D	37.0	116	226	40	70	PT-1/4					
JTR-38030D	38.0	119	229	40	70	PT-1/4					
JTR-39030D	39.0	122	232	40	70	PT-1/4					
JTR-40030D	40.0	125	235	40	70	PT-1/4					
JTR-41030D	41.0	128	238	40	70	PT-1/4					
JTR-42030D	42.0	131	241	40	70	PT-1/4	SPGT140512-PM	TSB-50125		TXL-20	
JTR-43030D	43.0	134	244	40	70	PT-1/4					
JTR-44030D	44.0	137	247	40	70	PT-1/4					
JTR-45030D	45.0	140	250	40	70	PT-1/4					
JTR-46030D	46.0	143	253	40	70	PT-1/4					
JTR-47030D	47.0	146	256	40	70	PT-1/4					
JTR-48030D	48.0	149	259	40	70	PT-1/4					
JTR-49030D	49.0	152	262	40	70	PT-1/4					
JTR-50030D	50.0	155	265	40	70	PT-1/4					

INDEXIBLE DRILL


JTR 4×D

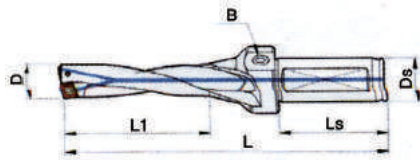

Type	D	L ₁	L	Ds	Ls	B	Insert	Screw	Wrench	
JTR-12540D	12.5	53	130	20	50	PT-1/8	SPGT050204-PM	TSB-20045	TXL-6	
JTR-13040D	13.0	55	132	20	50	PT-1/8				
JTR-13540D	13.5	57	134	20	50	PT-1/8				
JTR-14040D	14.0	59	136	20	50	PT-1/8				
JTR-14540D	14.5	61	138	20	50	PT-1/8				
JTR-15040D	15.0	63	140	20	50	PT-1/8				
JTR-15540D	15.5	65	151	25	56	PT-1/8	SPGT060204-PM	TSB-22052		TXL-6
JTR-16040D	16.0	67	153	25	56	PT-1/8				
JTR-16540D	16.5	69	155	25	56	PT-1/8				
JTR-17040D	17.0	71	157	25	56	PT-1/8				
JTR-17540D	17.5	73	159	25	56	PT-1/8				
JTR-18040D	18.0	75	161	25	56	PT-1/8				
JTR-18540D	18.5	77	163	25	56	PT-1/8				
JTR-19040D	19.0	79	165	25	56	PT-1/8				
JTR-19540D	19.5	81	167	25	56	PT-1/8				
JTR-20040D	20.0	83	169	25	56	PT-1/8				
JTR-20540D	20.5	85	171	25	56	PT-1/8	SPGT07T308-PM	TSB-25065	TXL-8	
JTR-21040D	21.0	87	173	25	56	PT-1/8				
JTR-21540D	21.5	89	175	25	56	PT-1/8				
JTR-22040D	22.0	91	177	32	60	PT-1/4				
JTR-22540D	22.5	93	188	32	60	PT-1/4				
JTR-23040D	23.0	95	190	32	60	PT-1/4				
JTR-23540D	23.5	97	192	32	60	PT-1/4				
JTR-24040D	24.0	99	194	32	60	PT-1/4				
JTR-24540D	24.5	101	196	32	60	PT-1/4				
JTR-25040D	25.0	103	198	32	60	PT-1/4				
JTR-25540D	25.5	105	200	32	60	PT-1/4	SPGT090408-PM	TSB-35090		TXL-15
JTR-26040D	26.0	107	202	32	60	PT-1/4				
JTR-26540D	26.5	109	204	32	60	PT-1/4				
JTR-27040D	27.0	111	206	32	60	PT-1/4				
JTR-27540D	27.5	113	208	32	60	PT-1/4				
JTR-28040D	28.0	115	210	32	60	PT-1/4				
JTR-28540D	28.5	117	212	32	60	PT-1/4				
JTR-29040D	29.0	119	214	32	60	PT-1/4				
JTR-29540D	29.5	123	218	32	60	PT-1/4				
JTR-30040D	30.0	125	220	32	60	PT-1/4				
JTR-31040D	31.0	129	224	32	60	PT-1/4	SPGT110408-PM	TSB-40100	TXL-20	
JTR-32040D	32.0	133	228	32	60	PT-1/4				
JTR-33040D	33.0	137	232	32	60	PT-1/4				
JTR-34040D	34.0	141	236	32	70	PT-1/4				
JTR-35040D	35.0	145	240	32	70	PT-1/4				
JTR-36040D	36.0	149	244	32	70	PT-1/4				
JTR-37040D	37.0	153	263	40	70	PT-1/4				
JTR-38040D	38.0	157	267	40	70	PT-1/4				
JTR-39040D	39.0	161	271	40	70	PT-1/4				
JTR-40040D	40.0	165	275	40	70	PT-1/4				
JTR-41040D	41.0	169	279	40	70	PT-1/4	SPGT140512-PM	TSB-50125		TXL-20
JTR-42040D	42.0	173	283	40	70	PT-1/4				
JTR-43040D	43.0	177	287	40	70	PT-1/4				
JTR-44040D	44.0	181	291	40	70	PT-1/4				
JTR-45040D	45.0	185	295	40	70	PT-1/4				
JTR-46040D	46.0	189	299	40	70	PT-1/4				
JTR-47040D	47.0	193	303	40	70	PT-1/4				
JTR-48040D	48.0	197	307	40	70	PT-1/4				
JTR-49040D	49.0	201	311	40	70	PT-1/4				
JTR-50040D	50.0	205	315	40	70	PT-1/4				

INDEXIBLE DRILL

JSFD 2×D

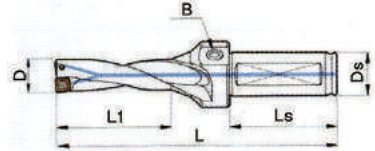


Type	D	L ₁	L	Ds	Ls	B	Insert	Screw	Wrench
JSFD-16020D	16	37	114	20	50	PT-1/8	WCMX030208R-PG	TSB-22045 (ZSB-22045)	TXL-6
JSFD-17020D	17	39	116	20	50	PT-1/8			
JSFD-18020D	18	41	118	20	50	PT-1/8			
JSFD-19020D	19	43	120	20	50	PT-1/8			
JSFD-20020D	20	45	122	20	50	PT-1/8			
JSFD-21020D	21	47	134	25	60	PT-1/8	WCMX040208R-PG	TSB-25055 (ZSB-25055)	TXL-8
JSFD-22020D	22	49	136	25	60	PT-1/8			
JSFD-23020D	23	51	138	25	60	PT-1/8			
JSFD-24020D	24	53	140	25	60	PT-1/8			
JSFD-25020D	25	55	142	25	60	PT-1/8			
JSFD-26020D	26	57	157	32	70	PT-1/4	WCMX050308R-PG	TSB-30070 (ZSB-30070)	
JSFD-27020D	27	59	159	32	70	PT-1/4			
JSFD-28020D	28	61	161	32	70	PT-1/4			
JSFD-29020D	29	63	163	32	70	PT-1/4			
JSFD-30020D	30	65	165	32	70	PT-1/4			
JSFD-31020D	31	67	167	32	70	PT-1/4	WCMX06T308R-PG	TSB-35090 (ZSB-35090)	TXL-15
JSFD-32020D	32	69	169	32	70	PT-1/4			
JSFD-33020D	33	71	171	32	70	PT-1/4			
JSFD-34020D	34	73	173	32	70	PT-1/4			
JSFD-35020D	35	75	175	32	70	PT-1/4			
JSFD-36020D	36	77	177	32	70	PT-1/4			
JSFD-37020D	37	79	179	32	70	PT-1/4			
JSFD-38020D	38	81	181	32	70	PT-1/4			
JSFD-39020D	39	83	183	32	70	PT-1/4			
JSFD-40020D	40	85	185	32	70	PT-1/4			
JSFD-41020D	41	87	187	32	70	PT-1/4	WCMX080412R-PG	TSB-40110 (ZSB-40110)	
JSFD-42020D	42	89	199	40	80	PT-1/4			
JSFD-43020D	43	91	201	40	80	PT-1/4			
JSFD-44020D	44	93	203	40	80	PT-1/4			
JSFD-45020D	45	95	205	40	80	PT-1/4			
JSFD-46020D	46	97	207	40	80	PT-1/4			
JSFD-47020D	47	99	209	40	80	PT-1/4			
JSFD-48020D	48	101	211	40	80	PT-1/4			
JSFD-49020D	49	103	213	40	80	PT-1/4			
JSFD-50020D	50	105	215	40	80	PT-1/4			
JSFD-51020D	51	107	217	40	80	PT-1/4	WCMX080412R-PG	TSB-40110 (ZSB-40110)	
JSFD-52020D	52	109	219	40	80	PT-1/4			
JSFD-53020D	53	111	221	40	80	PT-1/4			
JSFD-54020D	54	113	223	40	80	PT-1/4			
JSFD-55020D	55	115	225	40	80	PT-1/4			
JSFD-56020D	56	117	227	40	80	PT-1/4			
JSFD-57020D	57	119	229	40	80	PT-1/4			
JSFD-58020D	58	121	231	40	80	PT-1/4			

* TSB : Big screw head / ZSB : Small screw head

INDEXIBLE DRILL

JSFD 3×D

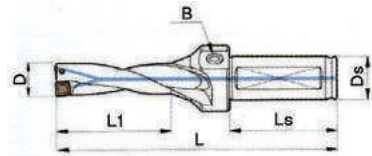


Type	D	L ₁	L	Ds	Ls	B	Insert	Screw	Wrench	
JSFD-16030D	16	53	130	20	50	PT-1/8	WCMX030208R-PG	TSB-22045 (ZSB-22045)	TXL-6	
JSFD-17030D	17	56	133	20	50	PT-1/8				
JSFD-18030D	18	59	136	20	50	PT-1/8				
JSFD-19030D	19	62	139	20	50	PT-1/8				
JSFD-20030D	20	65	142	20	50	PT-1/8				
JSFD-21030D	21	68	155	25	60	PT-1/8	WCMX040208R-PG	TSB-25055 (ZSB-25055)	TXL-8	
JSFD-22030D	22	71	158	25	60	PT-1/8				
JSFD-23030D	23	74	161	25	60	PT-1/8				
JSFD-24030D	24	77	164	25	60	PT-1/8				
JSFD-25030D	25	80	167	25	60	PT-1/8				
JSFD-26030D	26	83	183	32	70	PT-1/4	WCMX050308R-PG	TSB-30070 (ZSB-30070)		
JSFD-27030D	27	86	186	32	70	PT-1/4				
JSFD-28030D	28	89	189	32	70	PT-1/4				
JSFD-29030D	29	92	192	32	70	PT-1/4				
JSFD-30030D	30	95	195	32	70	PT-1/4				
JSFD-31030D	31	98	198	32	70	PT-1/4	WCMX06T308R-PG	TSB-35090 (ZSB-35090)		
JSFD-32030D	32	101	201	32	70	PT-1/4				
JSFD-33030D	33	104	204	32	70	PT-1/4				
JSFD-34030D	34	107	207	32	70	PT-1/4				
JSFD-35030D	35	110	210	32	70	PT-1/4				
JSFD-36030D	36	113	213	32	70	PT-1/4				
JSFD-37030D	37	116	216	32	70	PT-1/4				
JSFD-38030D	37	119	219	32	70	PT-1/4				
JSFD-39030D	39	122	222	32	70	PT-1/4				
JSFD-40030D	40	125	225	32	70	PT-1/4				
JSFD-41030D	41	128	228	32	70	PT-1/4	WCMX080412R-PG	TSB-40110 (ZSB-40110)	TXL-15	
JSFD-42030D	42	131	241	40	80	PT-1/4				
JSFD-43030D	43	134	244	40	80	PT-1/4				
JSFD-44030D	44	137	247	40	80	PT-1/4				
JSFD-45030D	45	140	250	40	80	PT-1/4				
JSFD-46030D	46	143	253	40	80	PT-1/4				
JSFD-47030D	47	146	256	40	80	PT-1/4				
JSFD-48030D	48	149	259	40	80	PT-1/4				
JSFD-49030D	49	152	262	40	80	PT-1/4				
JSFD-50030D	50	155	265	40	80	PT-1/4				
JSFD-51030D	51	158	268	40	80	PT-1/4				
JSFD-52030D	52	161	271	40	80	PT-1/4				
JSFD-53030D	53	164	274	40	80	PT-1/4				
JSFD-54030D	54	167	277	40	80	PT-1/4				
JSFD-55030D	55	170	280	40	80	PT-1/4				
JSFD-56030D	56	173	283	40	80	PT-1/4				
JSFD-57030D	57	176	286	40	80	PT-1/4				
JSFD-58030D	58	179	289	40	80	PT-1/4				

* TSB : Big screw head / ZSB : Small screw head

INDEXIBLE DRILL


JSFD 4×D

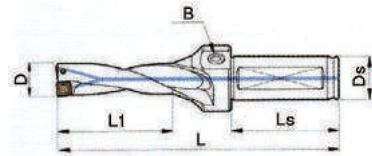

Type	D	L ₁	L	Ds	Ls	B	Insert	Screw	Wrench	
JSFD-16040D	16	69	146	20	50	PT-1/8	WCMX030208R-PG	TSB-22045 (ZSB-22045)	TXL-6	
JSFD-17040D	17	73	150	20	50	PT-1/8				
JSFD-18040D	18	77	154	20	50	PT-1/8				
JSFD-19040D	19	81	158	20	50	PT-1/8				
JSFD-20040D	20	85	162	20	50	PT-1/8				
JSFD-21040D	21	89	176	25	60	PT-1/8	WCMX040208R-PG	TSB-25055 (ZSB-25055)	TXL-8	
JSFD-22040D	22	93	180	25	60	PT-1/8				
JSFD-23040D	23	97	184	25	60	PT-1/8				
JSFD-24040D	24	101	188	25	60	PT-1/8				
JSFD-25040D	25	105	192	25	60	PT-1/8				
JSFD-26040D	26	109	209	32	70	PT-1/4	WCMX050308R-PG	TSB-30070 (ZSB-30070)		TXL-8
JSFD-27040D	27	113	213	32	70	PT-1/4				
JSFD-28040D	28	117	214	32	70	PT-1/4				
JSFD-29040D	29	121	221	32	70	PT-1/4				
JSFD-30040D	30	125	225	32	70	PT-1/4				
JSFD-31040D	31	129	229	32	70	PT-1/4	WCMX06T308R-PG	TSB-35090 (ZSB-35090)	TXL-15	
JSFD-32040D	32	133	233	32	70	PT-1/4				
JSFD-33040D	33	137	237	32	70	PT-1/4				
JSFD-34040D	34	141	241	32	70	PT-1/4				
JSFD-35040D	35	145	245	32	70	PT-1/4				
JSFD-36040D	36	149	249	32	70	PT-1/4				
JSFD-37040D	37	153	253	32	70	PT-1/4				
JSFD-38040D	37	157	257	32	70	PT-1/4				
JSFD-39040D	39	161	261	32	70	PT-1/4				
JSFD-40040D	40	165	265	32	70	PT-1/4				
JSFD-41040D	41	169	269	32	70	PT-1/4	WCMX080412R-PG	TSB-40110 (ZSB-40110)		TXL-15
JSFD-42040D	42	173	283	40	80	PT-1/4				
JSFD-43040D	43	177	287	40	80	PT-1/4				
JSFD-44040D	44	181	291	40	80	PT-1/4				
JSFD-45040D	45	185	295	40	80	PT-1/4				
JSFD-46040D	46	189	299	40	80	PT-1/4				
JSFD-47040D	47	193	303	40	80	PT-1/4				
JSFD-48040D	48	197	307	40	80	PT-1/4				
JSFD-49040D	49	201	311	40	80	PT-1/4				
JSFD-50040D	50	205	315	40	80	PT-1/4				
JSFD-51040D	51	209	319	40	80	PT-1/4				
JSFD-52040D	52	213	323	40	80	PT-1/4				
JSFD-53040D	53	217	327	40	80	PT-1/4				
JSFD-54040D	54	221	331	40	80	PT-1/4				
JSFD-55040D	55	225	335	40	80	PT-1/4				
JSFD-56040D	56	229	339	40	80	PT-1/4				
JSFD-57040D	57	233	343	40	80	PT-1/4				
JSFD-58040D	58	237	347	40	80	PT-1/4				

* TSB : Big screw head / ZSB : Small screw head

MILLING & DRILLING




SPG200

- PVD Coating
- P20, M20

Insert shape	Type	Dimensions (mm)					Grade
		L	ØI.C	s	d	r	SPG200
	WCMX030208R-PG	3.8	5.56	2.38	2.8	0.8	●
	WCMX040208R-PG	4.3	6.35	2.38	3.1	0.8	●
	WCMX050308R-PG	5.4	7.94	3.18	3.2	0.8	●
	WCMX06T308R-PG	6.5	9.525	3.97	3.7	0.8	●
	WCMX080412R-PG	8.7	12.7	4.76	4.3	1.2	●

● Stock



SPG207

- PVD Coating
- P20, M20


Insert shape	Type	Dimensions (mm)					Grade
		L	ØI.C	s	d	r	SPG200
	SPGT050204-PM	5.0	5.0	2.38	2.2	0.4	●
	SPGT060204-PM	6.0	6.0	2.38	2.6	0.4	●
	SPGT07T308-PM	7.94	7.94	3.97	2.8	0.8	●
	SPGT090408-PM	9.8	9.8	4.3	4.2	0.8	●
	SPGT110408-PM	11.5	11.5	4.76	4.4	0.8	●
	SPGT140512-PM	14.3	14.3	5.2	5.75	1.2	●

● Stock

MEMO

DRILLING

SPIDC 2D DRILL HOLDER

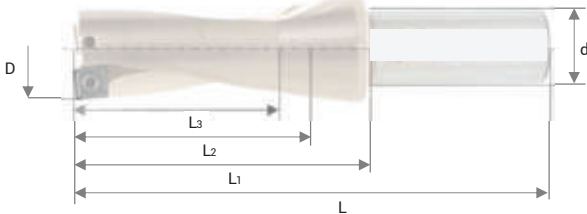

Designation	CP CODE	D	L	L ₁	L ₂	L ₃	d	Insert	Clamping screw	Wrench
SPIDC125-2D-S20-SP05	03080001	12.5	105	55	30	25	20	SPMG/SPGT 050204	M2.2X5	T6
SPIDC130-2D-S20-SP05	03080004	13	106	56	31	26				
SPIDC135-2D-S20-SP05	03080007	13.5	107	57	32	27				
SPIDC140-2D-S25-SP05	03080010	14	114	58	33	28				
SPIDC145-2D-S25-SP05	03080013	14.5	115	59	34	29				
SPIDC150-2D-S25-SP05	03080016	15	116	60	35	30				
SPIDC155-2D-S25-SP05	03080019	15.5	117	61	36	31				
SPIDC160-2D-S25-SP06	03080022	16	118	62	37	32				
SPIDC165-2D-S25-SP06	03080025	16.5	119	63	38	33	25	SPMG/SPGT 060204	M2.2X6	T7
SPIDC170-2D-S25-SP06	03080028	17	120	64	39	34				
SPIDC175-2D-S25-SP06	03080031	17.5	121	65	40	35				
SPIDC180-2D-S25-SP06	03080034	18	122	66	41	36				
SPIDC185-2D-S25-SP06	03080037	18.5	123	67	42	37				
SPIDC190-2D-S25-SP06	03080040	19	124	68	43	38				
SPIDC195-2D-S25-SP06	03080043	19.5	125	69	44	39				
SPIDC200-2D-S25-SP06	03080046	20	126	70	45	40				
SPIDC205-2D-S25-SP06	03080049	20.5	127	71	46	41				
SPIDC210-2D-S25-SP06	03080052	21	133	77	47	42				
SPIDC215-2D-S25-SP06	03080055	21.5	134	78	48	43				
SPIDC220-2D-S25-SP07	03080058	22	135	79	49	44				
SPIDC225-2D-S25-SP07	03080061	22.5	136	80	50	45				
SPIDC230-2D-S25-SP07	03080064	23	137	81	51	46				
SPIDC235-2D-S25-SP07	03080067	23.5	138	82	52	47				
SPIDC240-2D-S25-SP07	03080070	24	139	83	53	48				
SPIDC245-2D-S25-SP07	03080073	24.5	140	84	54	49				
SPIDC250-2D-S25-SP07	03080076	25	141	85	55	50	32	SPMG/SPGT 07T308	M2.5X6	T8
SPIDC255-2D-S32-SP07	03080079	25.5	146	86	56	51				
SPIDC260-2D-S32-SP07	03080082	26	147	87	57	52				
SPIDC265-2D-S32-SP07	03080085	26.5	147.5	88	58	53				
SPIDC270-2D-S32-SP07	03080088	27	149	89	59	54				
SPIDC275-2D-S32-SP07	03080091	27.5	150	90	61	55				
SPIDC280-2D-S32-SP09	03080094	28	151	91	61	56				
SPIDC285-2D-S32-SP09	03080097	28.5	152	92	62	57				
SPIDC290-2D-S32-SP09	03080100	29	153	93	63	58		SPMG/SPGT 090408	M3.5X10	T15
SPIDC295-2D-S32-SP09	03080103	29.5	154	94	64	59				
SPIDC300-2D-S32-SP09	03080106	30	155	95	65	60				

DRILLING


SPIDC 2D DRILL HOLDER



Designation	CP CODE	D	L	L ₁	L ₂	L ₃	d	Insert	Clamping screw	Wrench
SPIDC305-2D-S32-SP09	03080109	30.5	156	96	66	61	32	SPMG/SPGT 090408	M3.5X10	T15
SPIDC310-2D-S32-SP09	03080112	31	157	97	67	62				
SPIDC315-2D-S32-SP09	03080115	31.5	158	98	68	63				
SPIDC320-2D-S32-SP09	03080118	32	159	99	69	64				
SPIDC325-2D-S32-SP09	03080121	32.5	160	100	70	65				
SPIDC330-2D-S32-SP09	03080124	33	161	101	71	66				
SPIDC335-2D-S32-SP09	03080127	33.5	162	102	72	67				
SPIDC340-2D-S32-SP11	03080130	34	163	103	73	68				
SPIDC345-2D-S32-SP11	03080133	34.5	157	97	90	69		SPMG/SPGT 110408	M4X10	
SPIDC350-2D-S32-SP11	03080136	35	165	105	75	70				
SPIDC355-2D-S32-SP11	03080139	35.5	159	99	92	71				
SPIDC360-2D-S32-SP11	03080142	36	167	107	77	72				
SPIDC365-2D-S32-SP11	03080145	36.5	161	101	94	73				
SPIDC370-2D-S32-SP11	03080148	37	169	109	79	74				
SPIDC375-2D-S32-SP11	03080151	37.5	162	102	96	75				
SPIDC380-2D-S32-SP11	03080154	38	171	111	81	76				
SPIDC385-2D-S32-SP11	03080157	38.5	164	104	90	77				
SPIDC390-2D-S32-SP11	03080160	39	173	113	83	78				
SPIDC395-2D-S32-SP11	03080163	39.5	166	106	100	79				
SPIDC400-2D-S32-SP11	03080166	40	175	115	85	80				

DRILLING

SPIDC 3D DRILL HOLDER

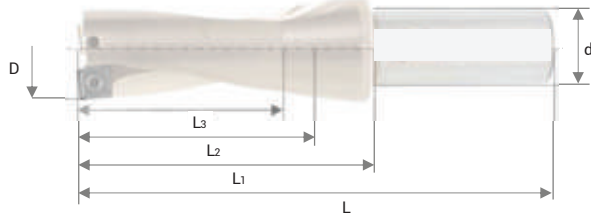

Designation	CP CODE	D	L	L ₁	L ₂	L ₃	d	Insert	Clamping screw	Wrench
SPIDC125-3D-S20-SP05	03080002	12.5	117.5	67.5	42.5	37.5	20	SPMG/SPGT 050204	M2.2X5	T6
SPIDC130-3D-S20-SP05	03080005	13	119	69	44	39				
SPIDC135-3D-S20-SP05	03080008	13.5	120.6	70.5	45.5	40.5				
SPIDC140-3D-S25-SP05	03080011	14	128	72	47	42				
SPIDC145-3D-S25-SP05	03080014	14.5	129.5	73.5	48.5	43.5				
SPIDC150-3D-S25-SP05	03080017	15	131	75	50	45				
SPIDC155-3D-S25-SP05	03080020	15.5	132.5	76.5	51.5	46.5				
SPIDC160-3D-S25-SP06	03080023	16	134	78	53	48				
SPIDC165-3D-S25-SP06	03080026	16.5	135.5	79.5	54.5	49.5	25	SPMG/SPGT 060204	M2.2X6	T7
SPIDC170-3D-S25-SP06	03080029	17	137	81	56	51				
SPIDC175-3D-S25-SP06	03080032	17.5	138.5	82.5	57.5	52.5				
SPIDC180-3D-S25-SP06	03080035	18	140	84	59	54				
SPIDC185-3D-S25-SP06	03080038	18.5	141.5	85.5	60.5	55.5				
SPIDC190-3D-S25-SP06	03080041	19	143	87	62	57				
SPIDC195-3D-S25-SP06	03080044	19.5	144.5	88.5	63.5	58.5				
SPIDC200-3D-S25-SP06	03080047	20	146	90	65	60				
SPIDC205-3D-S25-SP06	03080050	20.5	147.5	91.5	66.5	61.5				
SPIDC210-3D-S25-SP06	03080053	21	154	98	68	63				
SPIDC215-3D-S25-SP06	03080056	21.5	155.5	99.5	69.5	64.5				
SPIDC220-3D-S25-SP07	03080059	22	157	101	71	66				
SPIDC225-3D-S25-SP07	03080062	22.5	158.5	102.5	72.5	67.5				
SPIDC230-3D-S25-SP07	03080065	23	160	104	74	69				
SPIDC235-3D-S25-SP07	03080068	23.5	161.5	105.5	75.5	70.5				
SPIDC240-3D-S25-SP07	03080071	24	163	107	77	72				
SPIDC245-3D-S25-SP07	03080074	24.5	164.5	108.5	78.5	73.5				
SPIDC250-3D-S25-SP07	03080077	25	166	110	80	75	32	SPMG/SPGT 07T308	M2.5X6	T8
SPIDC255-3D-S32-SP07	03080080	25.5	171.5	111.5	81.5	76.5				
SPIDC260-3D-S32-SP07	03080083	26	173	113	83	78				
SPIDC265-3D-S32-SP07	03080086	26.5	174	114.5	84.5	79.5				
SPIDC270-3D-S32-SP07	03080089	27	176	116	86	81				
SPIDC275-3D-S32-SP07	03080092	27.5	177.5	117.5	87.5	82.5				
SPIDC280-3D-S32-SP09	03080095	28	179	119	89	84				
SPIDC285-3D-S32-SP09	03080098	28.5	180.5	120.5	90.5	85.5		SPMG/SPGT 090408	M3.5X10	T15
SPIDC290-3D-S32-SP09	03080101	29	182	122	92	87				
SPIDC295-3D-S32-SP09	03080104	29.5	183.5	123.5	93.5	88.5				
SPIDC300-3D-S32-SP09	03080107	30	185	125	95	90				

DRILLING


SPIDC 3D DRILL HOLDER



Designation	CP CODE	D	L	L ₁	L ₂	L ₃	d	Insert	Clamping screw	Wrench	
SPIDC305-3D-S32-SP09	03080110	30.5	186.5	126.5	96.5	91.5	32	SPMG/SPGT 090408	M3.5X10	T15	
SPIDC310-3D-S32-SP09	03080113	31	188	128	98	93					
SPIDC315-3D-S32-SP09	03080116	31.5	189.5	129.5	99.5	94.5					
SPIDC320-3D-S32-SP09	03080119	32	191	131	101	96					
SPIDC325-3D-S32-SP09	03080122	32.5	192.5	132.5	102.5	97.5					
SPIDC330-3D-S32-SP09	03080125	33	194	134	104	99					
SPIDC335-3D-S32-SP09	03080128	33.5	195.5	135.5	105.5	100.5		SPMG/SPGT 110408	M4X10		
SPIDC340-3D-S32-SP11	03080131	34	197	137	107	102					
SPIDC345-3D-S32-SP11	03080134	34.5	191.5	131.5	124.5	103.5					
SPIDC350-3D-S32-SP11	03080137	35	200	140	110	105					
SPIDC355-3D-S32-SP11	03080140	35.5	194.5	134.5	127.5	106.5					
SPIDC360-3D-S32-SP11	03080143	36	203	143	113	108					
SPIDC365-3D-S32-SP11	03080146	36.5	197.5	137.5	130.5	109.5					
SPIDC370-3D-S32-SP11	03080149	37	206	146	116	111					
SPIDC375-3D-S32-SP11	03080152	37.5	199.5	139.5	132.5	112.5					
SPIDC380-3D-S32-SP11	03080155	38	209	149	119	114					
SPIDC385-3D-S32-SP11	03080158	38.5	202.5	142.5	135.5	115.5					
SPIDC390-3D-S32-SP11	03080161	39	212	152	122	117					
SPIDC395-3D-S32-SP11	03080164	39.5	205.5	145.5	138.5	118.5					
SPIDC400-3D-S32-SP11	03080167	40	215	155	125	120					

DRILLING

WIDC 2D DRILL HOLDER

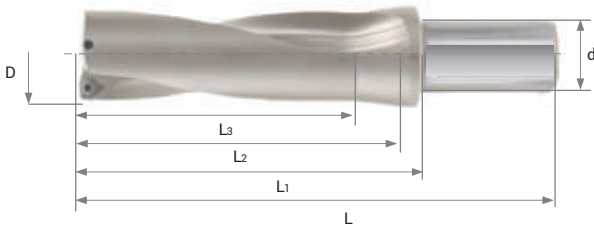

Designation	D	L	L ₁	L ₂	L ₃	d	Insert	Clamping screw	Wrench
WIDC140-2D-S25-WC03	14.0	109	53	46	28	25	WCGX 0302	M2.5X5	T7
WIDC145-2D-S25-WC03	14.5	110	54	47	29			M2.5X6	
WIDC150-2D-S25-WC03	15.0	109	53	46	30				
WIDC155-2D-S25-WC03	15.5	110	54	47	31				
WIDC160-2D-S25-WC03	16.0	111	55	48	32				
WIDC165-2D-S25-WC03	16.5	112	56	49	33				
WIDC170-2D-S25-WC03	17.0	113	57	50	34				
WIDC175-2D-S25-WC03	175.5	114	58	51	35				
WIDC180-2D-S25-WC03	18.0	115	59	52	36				
WIDC185-2D-S25-WC03	18.5	119	60	53	37				
WIDC190-2D-S25-WC03	19.0	115	59	52	38				
WIDC195-2D-S25-WC03	19.5	116	60	53	39				
WIDC200-2D-S25-WC04	20.0	117.5	61.5	54.5	40		WCGX 0402		T8
WIDC205-2D-S25-WC04	20.5	119	63	56	41				
WIDC210-2D-S25-WC04	21.0	120	64	57	42				
WIDC215-2D-S25-WC04	21.5	121	65	58	43				
WIDC220-2D-S25-WC04	22.0	122	66	59	44				
WIDC225-2D-S25-WC04	22.5	123	67	60	45				
WIDC230-2D-S25-WC04	23.0	124	68	61	46				
WIDC235-2D-S25-WC04	23.5	125	69	62	47				
WIDC240-2D-S25-WC05	24.0	126	70	63	48	32	WCGX 0503	M3.0X8	
WIDC245-2D-S25-WC05	24.5	127	71	64	49				
WIDC250-2D-S25-WC05	25.0	132	76	69	50				
WIDC255-2D-S32-WC05	25.5	137	77	70	51				
WIDC260-2D-S32-WC05	26.0	138	78	71	52				
WIDC265-2D-S32-WC05	26.5	139	79	72	53				
WIDC270-2D-S32-WC05	27.0	140	80	73	54				
WIDC275-2D-S32-WC05	27.5	141	81	74	55				
WIDC280-2D-S32-WC05	28.0	142	82	75	56				
WIDC285-2D-S32-WC05	28.5	143	83	76	57				
WIDC290-2D-S32-WC05	29.0	144	84	77	58				
WIDC295-2D-S32-WC05	29.5	145	85	78	59				
WIDC300-2D-S32-WC05	30.0	146	86	79	60				
WIDC305-2D-S32-WC05	30.5	146	86	79	61				
WIDC310-2D-S32-WC06	31.0	147	87	80	62		WCGX 06T3	M3.5X10	T15
WIDC315-2D-S32-WC06	31.5	148	88	81	63				

DRILLING


WIDC 2D DRILL HOLDER



Designation	D	L	L ₁	L ₂	L ₃	d	Insert	Clamping screw	Wrench
WIDC320-2D-S32-WC06	32.0	149	89	82	64	32	WCGX 06T3	M3.5X10	T15
WIDC325-2D-S32-WC06	32.5	150	90	83	65				
WIDC330-2D-S32-WC06	33.0	151	91	84	66				
WIDC335-2D-S32-WC06	33.5	152	92	85	67				
WIDC340-2D-S32-WC06	34.0	152	92	85	68				
WIDC345-2D-S32-WC06	34.5	153	93	86	69				
WIDC350-2D-S32-WC06	35.0	155	95	88	70				
WIDC355-2D-S32-WC06	35.5	156	96	89	71				
WIDC360-2D-S32-WC06	36.0	157	97	90	72				
WIDC365-2D-S32-WC06	36.5	158	98	91	73				
WIDC370-2D-S32-WC06	37.0	159	99	92	74				
WIDC375-2D-S32-WC06	37.5	161	101	94	75				
WIDC380-2D-S32-WC06	38.0	158.5	98.5	91.5	76				
WIDC385-2D-S32-WC06	38.5	159.5	99.5	92.5	77				
WIDC390-2D-S32-WC06	39.0	158	98	91	78				
WIDC395-2D-S32-WC06	39.5	159.5	99.5	92.5	79				
WIDC400-2D-S32-WC06	40.0	159	99	92	80				

DRILLING

WIDC 3D DRILL HOLDER

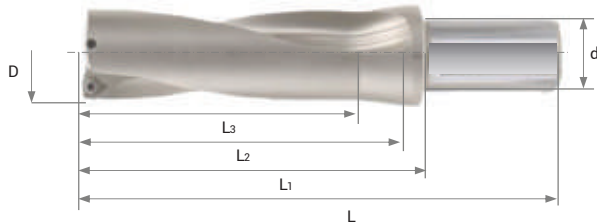

Designation	D	L	L ₁	L ₂	L ₃	d	Insert	Clamping screw	Wrench
WIDC140-3D-S25-WC03	14.0	123	67	60	42	25	WCGX 0302	M2.5X5	T7
WIDC145-3D-S25-WC03	14.5	124.5	68.5	61.5	43.5			M2.5X6	
WIDC150-3D-S25-WC03	15.0	124	68	61	45				
WIDC155-3D-S25-WC03	15.5	125.5	69.5	62.5	46.5				
WIDC160-3D-S25-WC03	16.0	127	71	64	48				
WIDC165-3D-S25-WC03	16.5	128.5	72.5	65.5	49.5				
WIDC170-3D-S25-WC03	17.0	130	74	67	51				
WIDC175-3D-S25-WC03	175.5	131.5	75.5	68.5	52.5				
WIDC180-3D-S25-WC03	18.0	133	77	70	54				
WIDC185-3D-S25-WC03	18.5	134.5	78.5	71.5	55.5				
WIDC190-3D-S25-WC03	19.0	134	78	71	57				
WIDC195-3D-S25-WC03	19.5	135.5	79.5	72.5	58.5				
WIDC200-3D-S25-WC04	20.0	137.5	81.5	74.5	60		WCGX 0402		T8
WIDC205-3D-S25-WC04	20.5	139.5	83.5	76.5	61.5				
WIDC210-3D-S25-WC04	21.0	141	85	78	63				
WIDC215-3D-S25-WC04	21.5	142.5	86.5	79.5	64.5				
WIDC220-3D-S25-WC04	22.0	144	88	81	66				
WIDC225-3D-S25-WC04	22.5	145.5	89.5	82.5	67.5				
WIDC230-3D-S25-WC04	23.0	147	91	84	69				
WIDC235-3D-S25-WC04	23.5	148.5	92.5	85.5	70.5				
WIDC240-3D-S25-WC05	24.0	150	94	87	72				
WIDC245-3D-S25-WC05	24.5	151.5	95.5	88.5	73.5				
WIDC250-3D-S25-WC05	25.0	157	101	94	75				
WIDC255-3D-S32-WC05	25.5	162.5	103	95.5	76.5				
WIDC260-3D-S32-WC05	26.0	164	104	97	78				
WIDC265-3D-S32-WC05	26.5	165.5	106	98.5	79.5				
WIDC270-3D-S32-WC05	27.0	167	107	100	81				
WIDC275-3D-S32-WC05	27.5	168.5	109	102	82.5				
WIDC280-3D-S32-WC05	28.0	170	110	103	84				
WIDC285-3D-S32-WC05	28.5	171.5	112	105	85.5				
WIDC290-3D-S32-WC05	29.0	173	113	106	87				
WIDC295-3D-S32-WC05	29.5	174.5	115	108	88.5				
WIDC300-3D-S32-WC05	30.0	176	116	109	90				
WIDC305-3D-S32-WC05	30.5	176.5	117	110	91.5	WCGX 06T3	M3.5X10	T15	
WIDC310-3D-S32-WC06	31.0	178	118	111	93				
WIDC315-3D-S32-WC06	31.5	179.5	120	113	94.5				

DRILLING

WIDC 3D DRILL HOLDER



Designation	D	L	L ₁	L ₂	L ₃	d	Insert	Clamping screw	Wrench
WIDC320-3D-S32-WC06	32.0	181	121	114	96	32	WCGX 06T3	M3.5X10	T15
WIDC325-3D-S32-WC06	32.5	182.5	123	116	97.5				
WIDC330-3D-S32-WC06	33.0	184	124	117	99				
WIDC335-3D-S32-WC06	33.5	185.5	126	119	101				
WIDC340-3D-S32-WC06	34.0	186	126	119	102				
WIDC345-3D-S32-WC06	34.5	187.5	128	121	104				
WIDC350-3D-S32-WC06	35.0	190	130	123	105				
WIDC355-3D-S32-WC06	35.5	191.5	132	125	107				
WIDC360-3D-S32-WC06	36.0	193	133	126	108				
WIDC365-3D-S32-WC06	36.5	194.5	135	128	110				
WIDC370-3D-S32-WC06	37.0	196	136	129	111				
WIDC375-3D-S32-WC06	37.5	198.5	139	132	113				
WIDC380-3D-S32-WC06	38.0	196.5	139	130	114				
WIDC385-3D-S32-WC06	38.5	198	137	131	116				
WIDC390-3D-S32-WC06	39.0	197	138	130	117				
WIDC395-3D-S32-WC06	39.5	199	137	132	119				
WIDC400-3D-S32-WC06	40.0	199	139	132	120				


TECHNICAL DATA

Test Results	A 296
Trouble Shooting	A 299
Hardness Conversion Table	A 300
Grade Comparison	A 302
Comparison of Work-piece	A 303




TECHNICAL DATA


HIGH TEMPERATURE STRENGTH

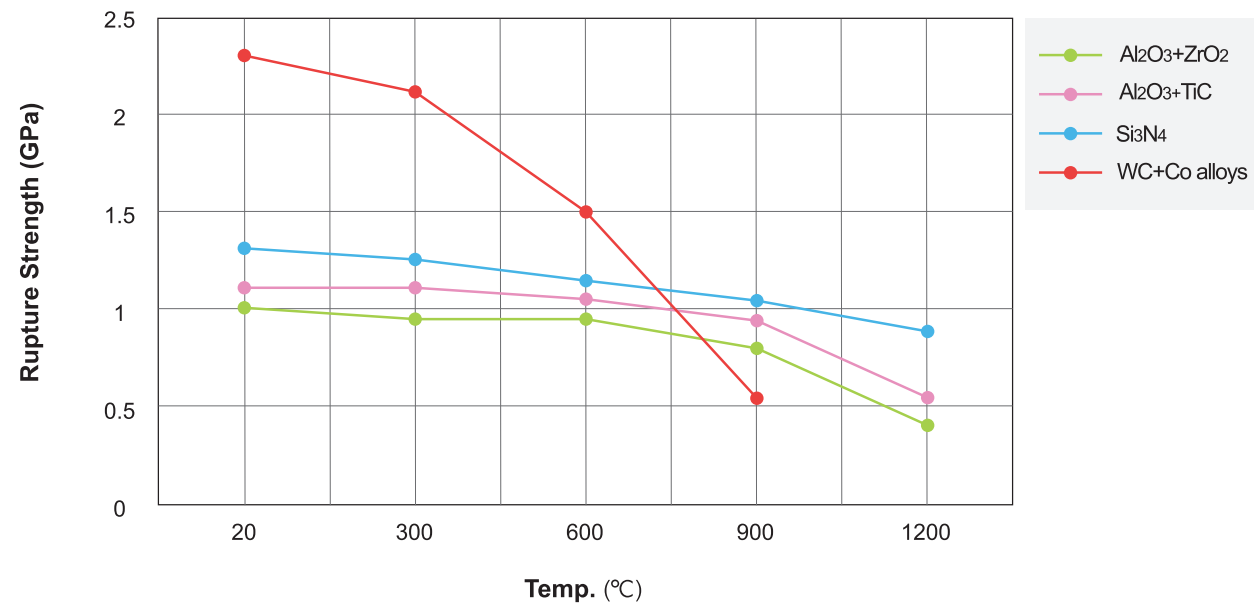


HARDNESS VS TEMPERATURE

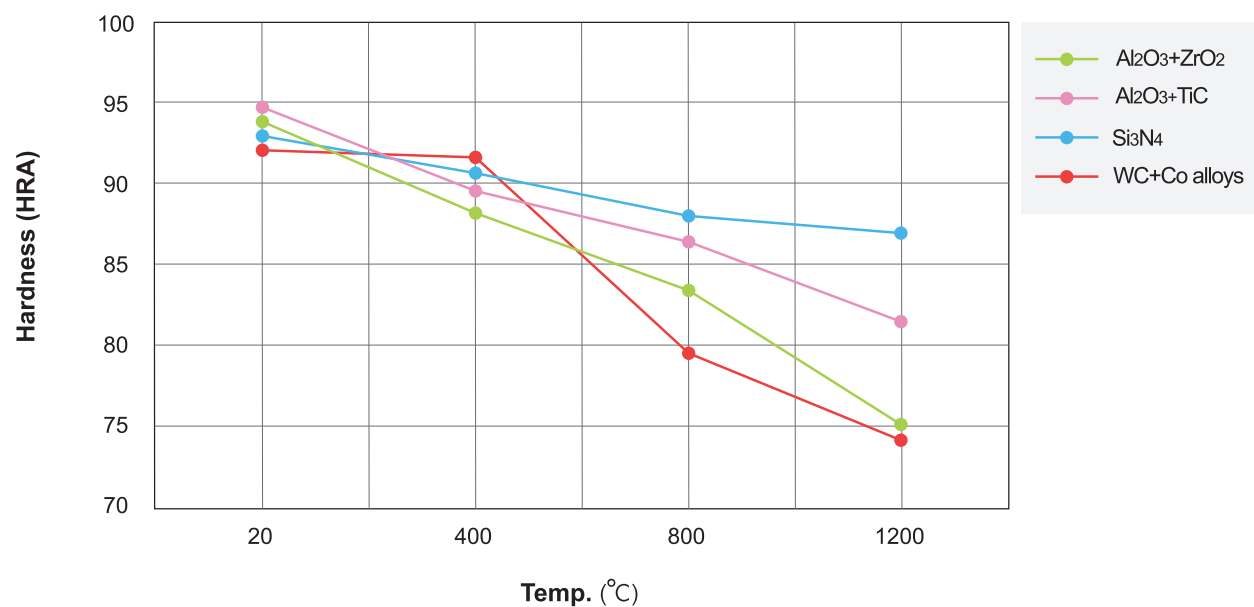

FLANK WEAR VS CUTTING DISTANCE

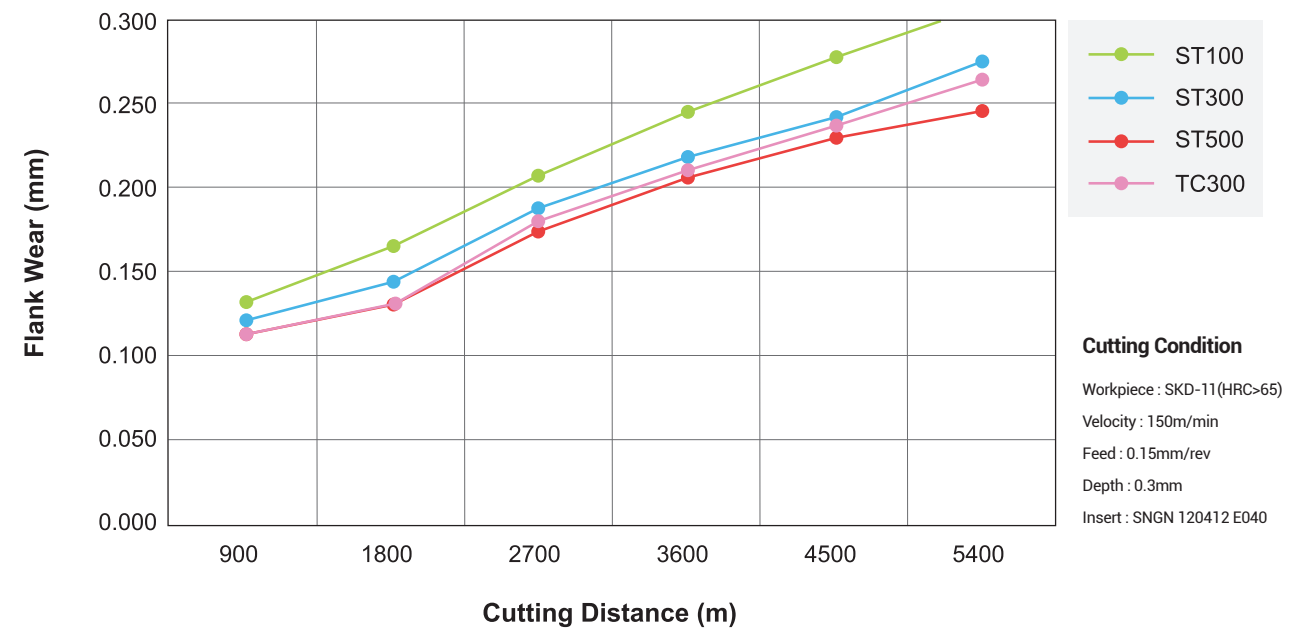


FLANK WEAR VS CUTTING DISTANCE

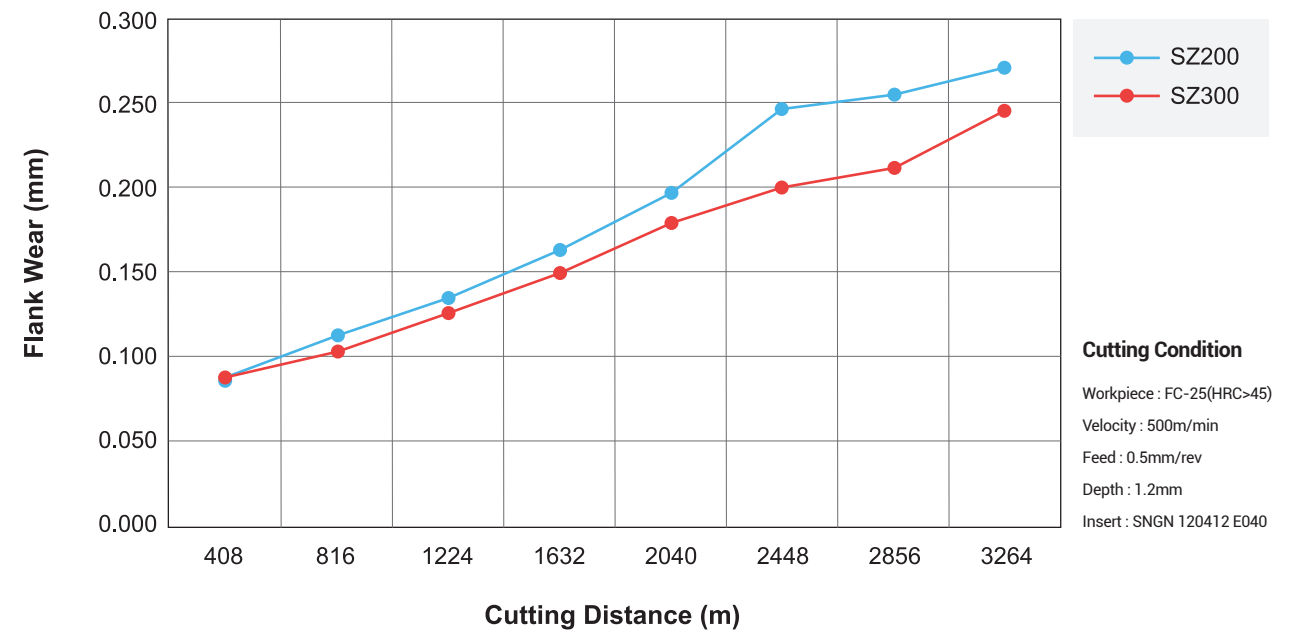


TECHNICAL DATA

FLANK WEAR VS CUTTING DISTANCE

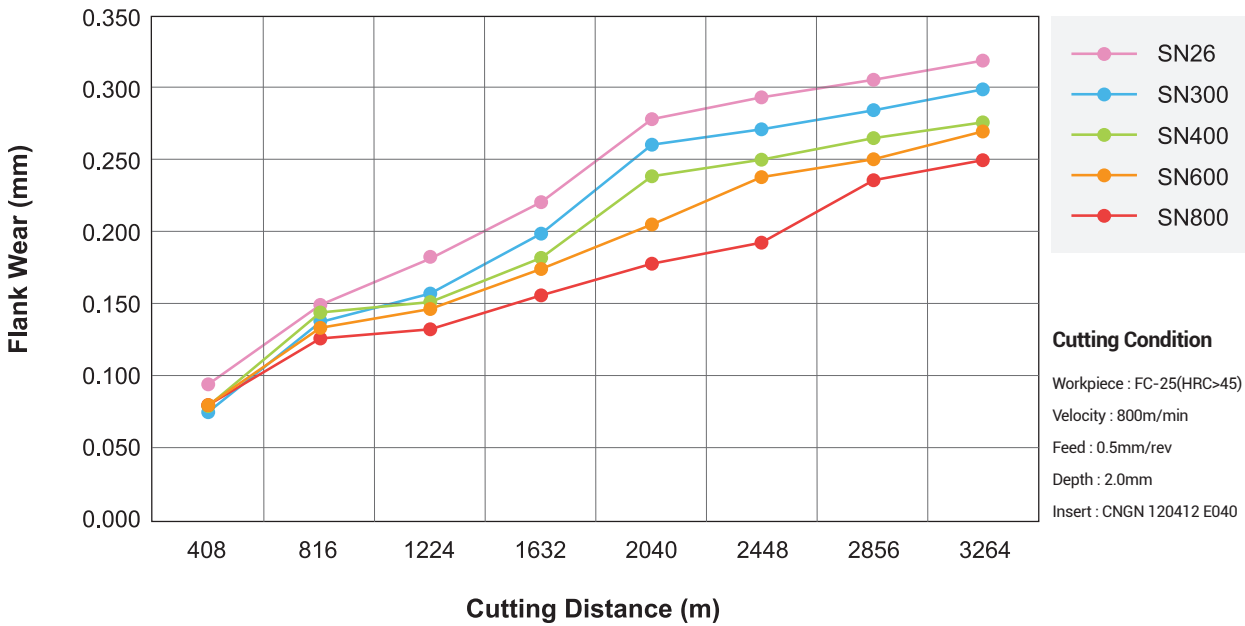

FLANK WEAR VS CUTTING DISTANCE

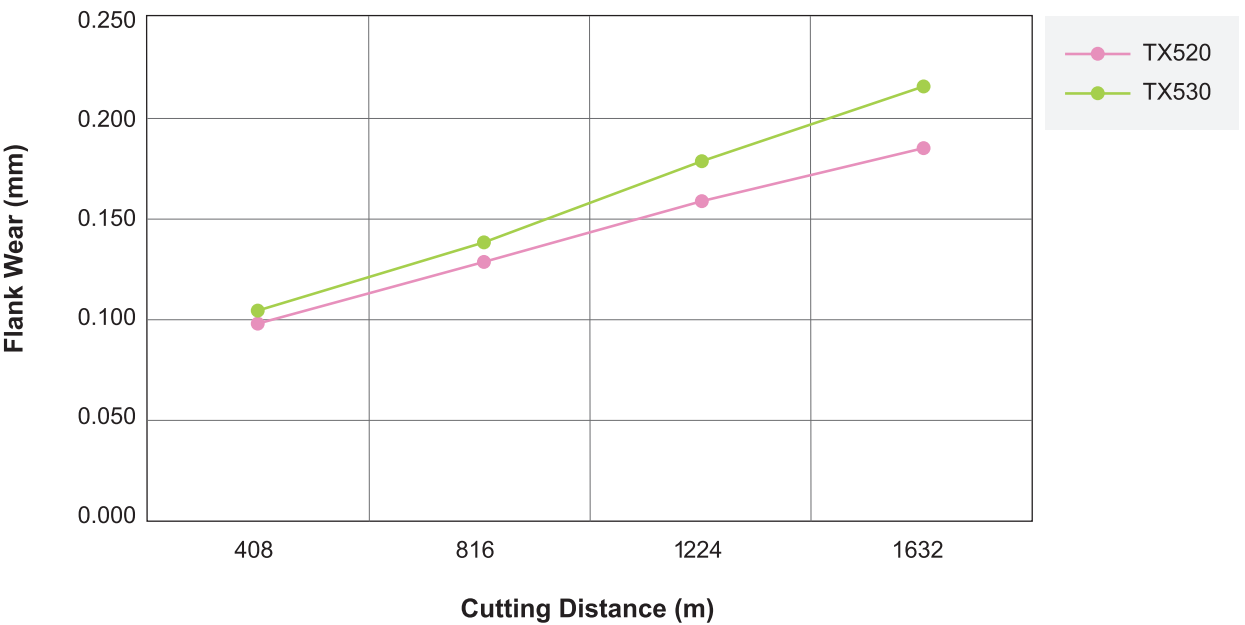

TROUBLE SHOOTING

Types	Status	Cause	Countermeasures
Flank Wear		- Variation of dimension - Deteriorated finishing surface - Increasing machining load	- Wear by grinded surface - Excessive feed rate and cutting speed - Reduce cutting Speed - Use larger corner radius - Use high wear-resistant grade
Crater Wear		- Deterioration of chip disposal - Deteriorated finishing surface	- Wear by chips (remarkable with ductile cast iron) - Excessive cutting speed - Reduce cutting Speed - Use smaller lead angle - Check edge geometry - Use high wear-resistant grade
Thermal Cracking		- Deteriorated finishing surface - Occurrence of chipping	- Severe cycle of heating & cooling during cutting - Excessive feed rate and cutting speed - Reduce cutting speed - Reduce feed rate - Change to dry machining - Use tougher grade
Notch Wear		- Deteriorated finishing surface - Increasing machining load	- Excessive feed rate and cutting depth - Reduce cutting depth - Reduce feed rate - Use tougher grade - Increase coolant supply
Edge Splintering		- Occurrence of fire flower - Occurrence of noise - Increasing Machining load	- Excessive feed rate - Falling-off of BUE - Weak cutting edge - Use tougher grade - Check edge geometry - Increase stability of the system - Use larger lead angle
Plastic Deformation		- Variation of dimension - Chipping of cutting edge	- High machining load - Use of improper grade - Reduce cutting speed - Reduce feed rate - Reduce cutting depth - Use harder grade
Built-up-Edge		- Deteriorated finishing surface - Variation of dimension - Occurrence of chipping	- High affinity with work piece - Low cutting speed - Increase cutting speed - Increase feed rate - Use tougher grade - Use larger rake angle
Breakage		- Occurrence of fire flower - Cutting impossible	- Using low toughness Insert - Using improper clamping holder - Use tougher grade - Reduce feed rate - Reduce cutting depth - Increase stability of the system

TECHNICAL DATA

HARDNESS CONVERSION TABLE

VICKERS HARDNESS NUMBER (HV)	KNOOP HARDNESS NUMBER (HK)	BRINELL HARDNESS NUMBER (HB)		ROCKWELL HARDNESS NUMBER (HR)				ROCKWELL SUPERFICIAL HARDNESS NUMBER (HR)			SHORE HARDNESS NUMBER (HS)	TENSILE STRENGTH (APPROX.)
		HBS 3000kgf LOAD 10mm STEEL BALL	HBW 3000kgf LOAD 10mm CARBIDE BALL	SCALE A 60kgf LOAD DIAMOND INDENTER	SCALE B 100kgf LOAD 1/16 STEEL BALL	SCALE C 150kgf LOAD DIAMOND INDENTER	SCALE D 100kgf LOAD DIAMOND INDENTER	SCALE 15N 15kgf LOAD DIAMOND INDENTER	SCALE 30N 30kgf LOAD DIAMOND INDENTER	SCALE 45N 45kgf LOAD DIAMOND INDENTER		
1865				92.1		80	86.5	96.5	92.0	87.0		
1787				91.6		79	85.7	96.3	91.5	86.2		
1710				91.1		78	84.9	96.1	90.9	85.4		
1633				90.6		77	84.2	95.8	90.3	84.5		
1556				90.1		76	83.4	95.5	89.7	83.6		
1478				89.6		75	82.6	95.2	89.1	82.5		
1400				89.0		74	81.8	94.9	88.5	81.6		
1323				88.5		73	81.0	94.6	87.9	80.7		
1245				88.0		72	80.1	94.3	87.2	79.7		
1160				87.1		71	79.4	94.0	86.5	78.7		
1076	972			86.8		70	78.6	93.7	85.8	77.6		
1004	946			86.2		69	77.8	93.4	85.1	76.4		
940	920			85.6		68	76.9	93.2	84.3	75.4		
900	895			85.0		67	76.1	92.9	83.6	74.2	95.2	
865	870			84.5		66	75.4	92.5	82.8	73.3	93.1	
832	846		739	83.9		65	74.5	92.2	81.9	72.0	91.0	
800	822		722	83.4		64	73.8	91.8	81.1	71.0	88.9	
772	799		705	82.8		63	73.0	91.4	80.1	69.9	87.0	
746	776		688	82.3		62	72.2	91.1	79.3	66.6	85.2	
720	754		670	81.8		61	71.5	90.7	78.4	67.7	83.3	
697	732		654	81.2		60	70.7	90.2	77.5	66.6	81.6	
674	710		634	80.7		59	69.9	89.8	76.6	65.5	79.9	
653	690		615	80.1		58	69.2	89.3	75.7	64.3	78.2	
633	670		595	79.6		57	68.5	88.9	74.8	63.2	75.6	
613	650		577	79.0		56	67.7	88.3	73.9	62.0	75.0	
595	630		560	78.5		55	66.9	87.9	73.0	60.9	73.5	212
577	612		543	78.0		54	66.1	87.4	72.0	59.8	71.9	205
560	594		525	77.4		53	65.4	86.9	71.2	58.6	70.4	199
544	576	500	512	76.8		52	64.6	86.4	70.2	57.4	69.0	192
528	558	487	496	76.3		51	63.8	85.9	69.4	56.1	67.6	186
513	542	475	481	75.9		50	63.1	85.5	68.5	55.0	66.2	179
498	526	464	469	75.2		49	62.1	85.0	67.6	53.8	64.7	172
484	510	451	455	74.7		48	61.4	84.5	66.7	52.5	63.4	167
471	495	442	443	74.1		47	60.8	83.9	65.8	51.4	62.1	161
458	480	432	432	73.6		46	60.0	83.5	64.8	50.3	60.8	156
446	466	421	421	73.1		45	59.2	83.0	64.0	49.0	59.6	151
434	452	409	409	72.5		44	58.5	82.5	63.1	47.8	58.4	146
423	438	400	400	70.0		43	57.7	82.0	62.2	46.7	57.2	141
412	426	390	390	71.5		42	56.9	81.5	61.3	45.5	56.1	136
402	414	381	381	70.9		41	56.2	80.9	60.4	44.3	55.0	132
392	402	371	371	70.4		40	55.4	80.4	59.5	43.1	53.9	127
382	391	362	362	69.9		39	54.6	79.9	58.6	41.9	52.9	124
372	380	353	353	69.4		38	53.8	79.4	57.7	40.8	51.8	120
363	370	344	344	68.9		37	53.1	78.8	56.8	39.6	50.7	118
354	360	336	336	68.4	109.0	36	52.3	78.3	55.9	38.4	49.7	114
345	351	327	327	67.9	108.5	35	51.5	77.7	55.0	37.2	48.7	110

VICKERS HARDNESS NUMBER (HV)	KNOOP HARDNESS NUMBER (HK)	BRINELL HARDNESS NUMBER (HB)		ROCKWELL HARDNESS NUMBER (HR)				ROCKWELL SUPERFICIAL HARDNESS NUMBER (HR)			SHORE HARDNESS NUMBER (HS)	TENSILE STRENGTH (APPROX.)
		HBS 3000kgf LOAD 10mm STEEL BALL	HBW 3000kgf LOAD 10mm CARBIDE BALL	SCALE A 60kgf LOAD DIAMOND INDENTER	SCALE B 100kgf LOAD 1/16 STEEL BALL	SCALE C 150kgf LOAD DIAMOND INDENTER	SCALE D 100kgf LOAD DIAMOND INDENTER	SCALE 15N 15kgf LOAD DIAMOND INDENTER	SCALE 30N 30kgf LOAD DIAMOND INDENTER	SCALE 45N 45kgf LOAD DIAMOND INDENTER		
336	342	319	319	67.4	108.0	34	50.8	77.2	54.2	36.1	47.7	108
327	334	311	311	66.8	107.5	33	50.0	76.6	53.3	34.9	46.6	105
318	326	301	301	66.3	107.0	32	49.2	76.1	52.1	33.7	45.6	102
310	318	294	294	65.8	106.0	31	48.4	75.6	51.3	32.5	44.6	100
302	311	286	286	65.3	105.5	30	47.7	75.0	50.4	31.3	43.6	97
294	304	279	279	64.7	104.5	29	47.0	74.5	49.5	30.1	42.7	95
286	297	271	271	64.3	104.0	28	46.1	73.9	48.6	28.9	41.7	93
279	290	264	264	63.8	103.0	27	45.2	73.3	47.7	27.8	40.8	90
272	284	258	258	63.3	102.5	26	44.6	72.8	46.8	26.7	39.9	88
266	278	253	253	62.8	101.5	25	43.8	72.2	45.9	25.5	39.2	86
260	272	247	247	62.4	101.0	24	43.1	71.6	45.0	24.3	38.4	84
254	266	243	243	62.0	100.0	23	42.1	71.0	44.0	23.1	37.7	82
248	261	237	237	61.5	99.0	22	41.6	70.5	43.2	22.0	36.9	80
243	256	231	231	61.0	98.5	21	40.9	69.9	42.3	20.7	36.3	79
238	251	226	226	60.5	97.8	20	40.1	69.4	41.5	19.6	35.6	77
230	243	219	219		96.7	18					34.6	75
222	236	212	212		95.5	16					33.5	72
213	229	203	203		93.9	14					32.3	69
204	220	194	194		92.3	12					31.1	66
196	212	187	187		90.7	10					30.0	63
188	204	179	179		89.5	8						61
180	196	171	171		87.1	6						59
173	189	165	165		85.5	4						56
166	181	158	158		83.5	2						54

PROPERTIES OF ELEMENTS

Element	Density (g/cm³)	Hardness (kg/mm²)	Young's Modulus (X10³ kg/mm²)	Thermal Expansion Coefficient (10 ⁻⁶ /°C)	Melting Point (°C)
WC	15.60	2,150	70	5.1	2,900
TiC	4.94	3,200	46	7.6	3,200
TaC	14.50	1,800	29	6.6	3,800
NbC	8.20	2,050	35	6.8	3,500
TiN	5.43	2,000	26	9.2	2,950
Al2O3	3.98	3,000	42	8.5	2,050
CBN	3.48	4,500	71	4.7	
Diamond	3.52 >	9,000	99	3.1	
Co	8.90		10~18	12.3	1,495
Ni	8.90		20	13.3	1,455

TECHNICAL DATA

GRADE COMPARISON

Grade	Maker	Union	NTK	Ceram Tec	Kennametal	Sandvik	Tungaloy	Greenleaf	Kyocera	Mitsubishi	Sumitomo	Taegu Tec
CERAMIC	Black	SD200	HC6	SH4								
		ST100	HC2		K090		LX21/M014A		A65	XD202	NB90S/NB90M	AB30/IN23
		ST300	HC7		KY1615 MC2	CC650	LX10	GEM6 GEM7	KT66		NB150H	AB20/IN22
		ST500 ST900	HC5	SH2								
	Coated Black	TC1/3/5/9	ZC4		KY4400 HTM85D	CC6050	LX11		A66N PT600M	XD805	NB100C	AB2010
		TM1/3/5/9	ZC7									
	White	SZ200 SZ300	HC1 HW2 HW3	SN60 SN180E SN180	K060 AC5	CC620	LXA	GEM9	AZ5000 KA30		W80	AW120
	Silicon Nitride	SN26 SN300 SN400 SN500 SN600	EC1 SX1 SX2 SX6	SL406 SL408 SL500 SL550	KY2000 KY3500	CC6090 CC6190	FX105 CX710	HSN100 GSN100	KS6000 KS6050	XE515 X520	NS260 SN2000K SN2100K	AS10
		SN700	SX5		KY3000			XSYTIN-1				AS20
	Coated Silicon Nitride	NC400 NC600	SP2	SL550C SL554C	KY3400 KYK25	GC1690	TF110	HSN200	CS7050	XE9	NS260C	SC10
	SiAlON	SN800		SL506/8 SL606/8	KYK10							AS500
		SN950	SX3 SX7		KY2100	CC6060 CC6065						
		SN1000	SX9	SL808	KY1540 KY530	CC6080 CC6160	TS200 TS300		KS6030 KS6040		SN1000S SN2000S	TC3020 TC3030
	Coated SiAlON	NC800 NC1000	SP9	SL654C SL658C SL858C	KYS25							
	Whisker	SW800	WA1		KY4300/MC3 KY1525/CW3020	CC670	TW43 (OEM)	WG300	KXW1		WX1500	TC430/IW7
		SW400	WA5									
	Coated Whisker	WT800 WT400						WG600 WG700				
CERMET	Non Coated	TX520		SC35 SC15 SC8015 SC7035 SC40	KT315 KT5020 KT125 KT150	CT5005 CT5015 CT525	NS710 NS520 NS720	TN30 TN610 TN60 TN620	AP25N NX2525 MP3025	T110A T1500A T1200A T2000Z		CT3000
				SC7015 SC60	KT1120 KT175	CT530	NS530 NS730	TN60 TN100M TC60M	VP45N NX99 NX3035	T3000Z T130Z		
		TX530			KZ20S		NS740		NX4545			CT7000
	Coated	TX920 TX930			KT513S	GC1525	GT720 GTS30 GT730		PV30 PV710 PV720 PV90	UP35N UP45N		PV3030 PV3010
	PCBN	SBN1000	B22	WBN735 WBN750	KB1345 KD120		BX950		KBN65B	MB710 MB730	BN500 BN600 BN700	
		SBN2000	B20	WBN570	KB1610 KD050/KD081	CB7015	BX310		KBN10B	MB810	BN250 BNX10	
		SBN3000	B24	WBN560	KB1625	CB7020	BX330			MB825	BN250	
		SBN4000	B36	WBN555	KB1630	CB7050	BX360 BN300 BX380 BX450		KBN25B	MB8025 MB850 MB835	BN350 BNX20 BNS25 BN250 BN80	
		SBN5000	B16	WBN100 WBN101	KD230	CB50	BX90S		KBN900	MBS140	BNS800	
PCD	SPD1000						DX120		KPD001 KPD002	MD230	DA200	
	SPD2000	PA1			KD100 KD1415	CD10	DX140		KPD010	MD220	DA150	
	SPD3000	PD1			KD100		DX160		KPD025	MD205	DA90 DA1000	
							DX180					

COMPARISON OF WORK-PIECE

ISO	Korea KS	United Kingdom BS	America AIS/SAE	German DIN	Spain UNF	Italy UNI	Sweden SS	France AFNOR	Japan JIS
P Steel	Carbon steels								
	-	4360 40 C	A570-36	RSt.37-2	-	-	1311	E24-2 Ne	STKM 12A:C
	-	4360 43 C	A573-81	S275J2G3	-	-	1412	E28-3	SM400A:B:C
	-	4360 50 B	-	S355J2G3+C2	-	Fe52BFN/Fe52CFN	2132	E36-3	SM490A:B:C:YA:YB
	-	030A04	1115	-	-	-	1325	-	-
	SM15C	080M15	1015	Ck15	C15K	C16	1350	XC12	S15C
	SM20C	070M20	1020	Ck22	F112	C20, C21	1450	CC20	-
	SM25C	-	1025	Ck25	-	-	-	-	S25C
	SM35C	060A35	1035(1037)	Ck35	-	C36	1572	XC38TS	S35C
	SM45C	080M46	1045(1046)	Ck45	C45K	C45	1672	XC42	S45C
	SM50C	060A52	1050	Ck50	-	C53	1674	XC48TS	S50C
	SM55C	070M55	1055	Ck55	C55K	C50	1655	XC55	S55C
	SM58C	080A62	1060	Ck58	-	C60	1678	XC60	S58C
	-	060A96	1095	Ck101	F5117	-	1870	XC100	-
	-	212M36	1140	35S20	F210G	-	1957	35MF4	-
	SCMn1	150M28	1330	28Mn6	-	-	-	20M5	SCMn1
	SMn433	150M36	1039	40Mn4	-	-	-	35M5	-
	-	230M07	1215	9SMn36	12SMn35	CF9Mn36	-	S300	-
	SUM22	230M07	1213	9SMn28	11SMn28	CF9SMn28	1912	S250	SUM22
	SUM22L	-	12L13	9SMnPb28	11SMnPb28	CF9SMnPb28	1914	S250Pb	SUM22L
	-	-	12L14	-SMnPb36	12SMnPb25	CF9SMnPb36	1926	S300Pb	-
	SMn438(H)	-	1355	36Mn5	36Mn5	-	2120	40M5	SMn738(H)
	STC3	BW1A	W1	C105W1	F.5118	C36KU	1880	Y105	SK3
	STS43	BW2	W210	C105W1	F.515	C120KU	2900	Y120	SUP4
	Low alloy steels								
	SNC815	655M13	3310:3415	14NiCr14	-	-	-	12NC15	SNC815(H)
	SNC415	-	3415	14NiCr10	15NiCr11	16NiCr11	-	14NC11	SNC415(H)
	SNC236	640A35	3135	36NiCr6	-	-	-	35NC6	SNC236
	SCM420,SCM430	1717DS110	41300	25CrMo4	55Cr3	25CrMo(KB)	2225	25CD4	SCM420,SCM430
	SCM432,SCCRM3	708A37	4137:4135	34CrMo4	34CrMo4	35CrMo4	2234	35CD4	SCM432,SCCRM3
	SCM415	-	-	15CrMo5	12CrMo4	12CrMo4	2216	12CD4	SCM415(H)
	SCM440	708M40	4140	42CrMo4	42CrMo4	42CrMo4	2244	42CD4	SCM440(H)
	SCM440	708M40	4140:4142	41CrMo4	42CrMo4	41CrMo4	2244	42CD4TS	SCM440
	-	820A16	-	17CrNiMo6	14CrNiMo13	-	-	18NCD6	-
	-	1503-245-420	4520	16Mo5	16Mo5	16Mo5	-	-	-
	SCr415	523M15	5015	15Cr3	-	-	-	12C3	SCr415(H)
	-	(527M20)	5115	16MnCr5	16MnCr5	16MnCr5	2511	16MC5	-
	SCr430	530A32	5132	34Cr4	35Cr4	35Cr4(KB)	-	32C4	SCr430(H)
	SCr440	530M40	5140	42Cr4	42Cr4	41Cr4	2245	42C4	SCr440(H)
	SPS	735A50	6150	50CrV4	51CrV4	50CrV4	2230	50CA4	SUP10
	SPS9	527A60	5155	55Cr3	-	-	-	55Cr3	SUP9(A)
	-	905M39	-	41CrAlMo7	41CrAlMo7	41CrAlMo7	2940	40CAD6,12	-
	SNCM220	805M20	8620	21NiCrMo22	20NiCrMo2	20NiCrMo2	2506	30NCD2	SNCM22(H)
	-	605A32	-	22Mo4	F520.S	-	2108	-	-
	SNCM240	311-Type7	8740	40NiCrMo8-4	40NiCrMo2	40NiCrMo2(KB)	-	-	SNCM240
	-	250A53	9255	55Si7	56Si7	55Si8	2085	55S7	-
	-	816M40	9840	36CrNiMo4	35CrNiMo4	38CrNiMo4(KB)	-	40NCD3	-
	-	823M30	-	50CoMo4	-	653M31	2512	-	-
	SU2	534A99	52100	100Cr6	F.131	100Cr6	2258	100C6	SU2
	-	BL3	L3	100Cr6	100Cr6	-	-	Y100C6	-
	SUM22L	-	12L13	9SMnPb28	11SMnPb28	CF9SMnPb28	1914	S250Pb	SUM22L
	-	-	12L14	-SMnPb36	12SMnPb25	CF9SMnPb36	1926	S300Pb	-
	-	-	L6	50NiCr13	F-528	-	2550	55NCDV6	-
	STF4	-	L6	55NiCrMoV6	F.520.S	-	-	55NCDV7	SKT4
	STS31	-	-	105WCr6	105WCr5	10WCr6	2140	105WC13	SKS31
	-	1501-620Gr27	ASTM A182	13CrMo44	14CrMo45	14CrMo45	-	15CD3.5 / 15CD4.5	-
	-	1501-622	ASTM A182	10CrMo910	TU.H	12CrMo9,10	2218	12CD9,10	-
	-	832M13	-	14NiCrMo134	14NiCrMo131	15NiCrMo13	-	-	-
	-	-	ASTM A350LF5	14Ni6	15Ni6	14Ni6	-	16N6	-
	-	817M40	4340	34CrNiMo6	-	35NiCrMo6(KB)	2541	35NCD6	-
	-	BS1	S1	45WCrV7	45WCrSi8	45WCrV8KU	2710	-	-
	-	1501-240	ASTM A204Gr.A	15Mo3	16Mo3	16Mo3KW	2912	15D3	-
	-	722M24	-32CrMo12	32CrMo12	F124.A	32CrMo12	2240	30CD12	-
	High alloy steels								
	STD1	BD3	D3	X210Cr12	X210Cr12	X210CrMoV13KU	-	Z200C12	SKD1
	STS12	BA2	A2	X100CrMoV5.1	X100CrMoV5	X100CrMoV51KU	2260	Z100CDV5	SKD12
	-	-	-	X210CrW12	X210CrE12	X215CRW121KU	2312	-	SKD2
	STD61	BH21	H21	X30WCrV9	X30WCrV9	X28W09KU	-	Z30WCV9	SKD5
	-	BH13	H13	X40CrMoV51	X40CrMoV5	X35CrMoVku	2242	Z40CDV5	SKD61
	-	-	-	X165CrMoV12	X160CrMoV12	X165CrMoV12KU	2310	-	-
	-	1501-509:510	ASTM A353	X8Ni9	XBNi09	X10Ni9	-	-	-
	-	4959BA2	D3	S6-5-2	-	15NiCrMo13	2715	Z40CSD10	SUH3
	-	401S45	HW3	X45GrSi93	F322	10WCr6	-	Z45CS9	SKH55
	SCMnH1	Z120M12	L3	G-X120Mn12	X120Mn12	XG120Mn12	2183	Z120M12	SCMnH/1
	SKH55	BM35	M35	S6-5-2-5	F.5613	HS6-5-2-5	2723	6-5-2-5	SKH55
	SKH3	BT4	T4	S18-1-2-5	HS18-1-1-5	X78WCo1805KU	-	Z80WKCV	SKH9
	SKH51	BM2	M2	S6-5-2	HS6-5-2-5	X82WMo0650KU	2722	Z85WDCV	SKH51
	-	-	-	M7	H2-9-2	Z100WCWHS2-9-2	2782	S2-9-2	-
	SKH2	BT1	T1	S18-0-1	HS18-0-1	X75W18KU	-	Z08WCV	SKH2

TECHNICAL DATA

COMPARISON OF WORK-PIECE

ISO	Korea KS	United Kingdom BS	America AIS/SAE	German DIN	Spain UNF	Italy UNI	Sweden SS	France AFNOR	Japan JIS
M Stainless Steel	STS301	-	301	X9CrNi18-8	F.3517	X12CrNi17 07	2331	Z12CN17.07	SUS301
	STS303	303S21	303	X8CrNiS18-9	F.3508	X10CrNiS18.09	2346	Z10CNF18.09	SUS303
	STS304	304S31	304	-	F.3504 F.3541	X5CrNi18 10	2332/2333	Z6CN18.09	SUS304
	STS304	304S15	304	X5CrNi18-10	F.3551	X5CrNi18 10	2332	Z6CN18.09	SUS304
	-	304S11:12	304L	X2CrNi19-11	-	X2CrNi18 11	2352	-	-
	-	304S13	316L	X2CrNiMo17-12-2	-	X2CrNiMo17 12	2348	Z2CND17.12	-
	SSC16, STS316L	304S13	316L	X2CrNiMo18-14-3	-	X2CrNiMo17 12	2353	Z2CND17.12	SCS16, SUS316L
	SSC17	301S21	308	X2CrNiMoN17-11-2	F.8414	-	2370	Z1NCDU25.20	SCS17
	STS304LN	304S62	304LN	X2CrNi18-10	-	-	2371	Z2CN18.10	SUS304LN
	-	401S45	HW3	X45CrS9-3-1	F322	X45CrSi8	-	Z45CS9	SUH1
	-	443S65	HNv6	X85CrMoV18-2	F320B	X80CrSiNi20	-	Z80CSN20.02	SUH4
	STR309	309S24	309	X15CrNiSi20-12	-	-	-	Z15CNS20.12	SUH309
	STR310	310S24	310S	X12CrNi2521	F.331	X60CrNi25.20	2361	Z12CN25 20	SUH310
	-	312S54	-	X1CrNiMoCuN20-18-7	-	-	2378	Z1CNDU20-18-06AZ	-
	-	316S33	316	X3CrNiMo17-3-3	-	X8CrNiMo17.13	2343, 2347	Z6CND18-12-03	-
	STS316	316S16	316	X5CrNiMo17-2-2	F.3543	X5CrNiMo17.12	2347	Z6CND17.11	SUS316
	STS316LN	-	316LN	X2CrNiMoN17-13-3	-	-	2375	Z2CND1713	SUS316LN
	STS316L	-	316L	X2CrNiMo1812	-	-	-	-	SUS316LN
	STS416	416S21	416	X12CrS13	F.3411	X12CrS13	2380	Z11CF13	SUS416
	-	320S17	316Ti	X6CrNiMoTi17-12-2	F.3535	X6CrNiMoTi17 12	2350	Z6VDT17.12	-
	STS317L	317S12	317L	X24CrNiMo18-15-4	-	X2CrNiMo1816	2367	Z2CND19.15	SUS317L
	-	-	318	X10CrNiMoNb18-12	-	X6CrNiMoNb17 13	-	Z6CNDNb17 13B	-
	-	-	S32304	"X2CrNiN,234"	-	-	2327	Z2CN23-04AZ	-
	-	-	S32900	X8CrNiMo.275	-	-	2324	-	-
	-	-	S31803	X2CrNiMoN	-	-	2377	Z2CND22-0503	-
	STS321	351S12	321	X10CrNiTi	F.3553 F.3523	X6CrNiTi18.11	2337	Z6CNT18.10	SUS321
	STS347	347S17	347	X6CrNiNb18-10	F.3552 F.3524	X6CrNiNb18.11	2338	Z6CNNb18.10	SUS347
	STS12	BA2	A2	Z100CnMoV51	Z100CnMoV51	Z100CnMoV51KU	2260	Z100CDV5	SKD12
	STS403	403S17	403	X6Cr13	F.3110	X6Cr13	2301	Z6C13	SUS403
	STS405	403S17	405	X10CrAl13	F.3110	X10CrAl13	-	Z10C13	SUS405
	STS410	410S21	410	X10Cr13	F.3401	X12Cr13	2302	Z10C14	SUS410
	STS420J2	420S45	-	X46Cr13	F.3405	X40Cr145	2304	Z4CM	SUS420J2
	STS430	430S15	430	X10CrAl18	F.3113	X8Cr17	-	Z10CAS18	SUS430
	STS430	430S15	430	X6CrAl17	F.3113	X8Cr17	2320	ZBC17	SUS430
	STS430F	-	430F	X14CrMoS17	F.3117	X10CrS17	2383	Z10CF17	SUS430F
	STS431	431S29	431	X22CrNi6	F.3427	X16CrNi16	2321	Z15CNi6.02	SUS431
	STS434	434S17	434	X6CrMo17-1	-	X8CrMo17	2325	ZBCD17.01	SUS434
	SSC5	425C11	CA6-NM	X3CrNiMo13-4	-	(G)X6CrNi304	2385	Z4CND13.4M	SCS5
	STR35,STR36	349S54	EV8	X53CrMnNiN21-9	-	X53CrMnNiNN21.09	-	Z52CMN21.09	SUH35,SUH36
	STR446	-	446	X10CrA2-4	-	X16Cr26	2322	Z10CAS24	SUH446
	HRHC15	330C11	-	G-X40NiCrSi36-18	-	XG50NiCr39 19	-	-	SCH15
	STR330	-	330	X12NiCrSi36-16	F.3313	-	-	Z12NCS35.16	SUH330
	-	3072-76	4676	NiCu30Al	-	-	-	-	-
	-	-	5390A	-	-	-	-	NC22FeD	-
	-	Mar-46	5391	S-NiCr13A16MoNb	-	-	-	NC12D	-
	-	HR8	5383	NiCr19Fe19NbMo	-	-	-	NC19rNB	-
	-	-	5537C	CoCr20W15Ni	-	-	-	KC20WN	-
	-	-	5660	NiFe35Cr14MoTi	-	-	-	ZSNCDT42	-
	-	-	5666	NiCr22Mo9Nb	-	-	-	NC22FeDNB	-
	-	-	AMS5397	NiCr15Cr10MoATi	-	-	-	-	-
	-	-	AMS5399	NiCr19Co11MoTi	-	-	-	NC19KDT	-
	-	-	AMS5544	NiCr19Fe19NbMo	-	-	-	NC20K14	-
	-	-	AMS5772	CoCr22W14Ni	-	-	-	KC22WN	-
	-	TA10-13/TA28	AMSR56400	TiAl6V4	-	-	-	T-A6V	-
	-	YA14/17	AMSR54520	TiAl5Sn2.5	-	-	-	T-A5E	-

COMPARISON OF WORK-PIECE

ISO	Korea KS	United Kingdom BS	America AIS/SAE	German DIN	Spain UNF	Italy UNI	Sweden SS	France AFNOR	Japan JIS
K Cast iron	Gray cast iron								
	GC100	-	No20B	GG10	-	FG10	0110	F110D	FC100
	GC150	Grade150	No25B	GG15	-	FG15	0115	F115D	FC150
	GC200	Grade220	No30B	GG20	-	-	0120	F120D	FC200
	GC250	Grade260	No35B	GG25	-	FG25	0125	F125D	FC250
	GC300	Grade300	GNo45B	GG30	-	FG30	0130	F130D	FC300
	GC350	Grade350	No50B	GG35	-	FG35	0135	F135D	FC350
	-	Grade400	No55B	-	-	-	0140	F140D	-
	Ductile cast iron								
	GCD400	SNG420/12	60-40-18	GGG40	FGE 38-17	GS370-12	0717-02	FCS400-12	FCD400
	GCD500	SNG500/7	80-55-06	GGG50	FGE 50-7	GS500	0727	FGS500-7	FCD500
	GCD600	SNG600/3	-	GGG60	-	-	0732-03	FGS600-3	FCD600
	GCD700	SNG700/2	100-70-03	GGG70	FGS 70-2	GS700-2	0737-01	FGS700-2	FCD700
	-	Grade S6	A43D2	XNiCr20-2	-	-	0776	S-NC 202	-
	-	8 290/6	-	-	-	-	0814	MN 32-8	FCMB310
	-	B340/12	32510	GTS-35	-	-	0815	MN35-10	FCMW330
	-	P440/7	40010	GTS-45	-	GMN 45	0852	MN450	FCMW370
	-	P510/4	50005	GTS-55	-	GMN 55	0854	MP50-5	FCMP490
	-	P570/3	70003	-	-	-	0858	MP60-3	FCMP540
	-	P570/3	A220-70003	GTS-65	-	GMN 65	0856	MN 650-3	FCMP590
	-	P690/2	A220-80002	GTS-70	-	GMN 70	0862	MN700-2	FCMP690
	Aluminium alloy								
	-	1080(1A)	-	A199.90	-	-	-	1080A	A1080
	-	1050(1B)	1050	A199.50	-	-	-	1050A	A1050
	-	NS4	5052	AlMg2.5	-	-	-	5052	A5052
	-	NB6	5056	AlMg5	-	-	-	-	A5056
	-	NG61	5456	-	-	-	-	5957	A5556
	-	-	2036	AlCu2.5Mg0.5	-	-	-	2117	A2117
	-	HF15	-	AlCuMg1	-	-	-	2017S	A2017
	-	-	2124	AlCuMg2	-	-	-	2024	A2024

TECHNICAL DATA

COMPARISON OF WORK-PIECE (NI-BASED HEAT RESISTANT ALLOYS)

Material Condition	Commercial designation	Hardness Brinell HB		Nominal composition Approximate content in %										
		Ann.	Aged	Ni	Cr	Co	Fe	Mo	C	Mn	Si	Al	Ti	Others
Ni-based Alloys	Haynes 80A	-	-	70.9	20	2	3	-	0.1	-	-	1.5	2.5	-
	Haynes 75	-	-	73.7	20	-	5	-	0.12	-	-	0.25	0.4	0.5
	Haynes 263	-	-	51.4	20	20	-	6	0.06	-	-	1	1.5	-
	Haynes 600	-	-	75.9	16	-	8	-	0.08	-	-	-	-	-
	Haynes 625	-	-	61.4	21	-	5	9	0.1	-	-	-	-	3.5
	Haynes X-750	-	-	74.9	16	-	7	-	0.08	-	-	0.8	0.25	1
	Haynes 718	-	-	53.5	18	-	19	3	0.08	-	-	0.5	0.9	5
	Inconel 781	-	-	70	16	-	8	-	0.07	2.25	0.15	0.1	3	0.2
	Inconel 783	-	-	30	3.5	26.5	27	-	0.03	0.05	-	6	0.4	-
	Inconel HX	-	-	47	22	1.5	18	9	-	-	-	-	-	0.6
	Inconel MA 754	-	-	77.5	20	-	1	-	-	-	-	0.3	0.5	0.6
	Nickel 200	-	-	99	-	-	0.4	-	0.15	0.35	0.35	-	-	0.26
	Nickel 201	-	-	99	-	-	0.4	-	0.02	0.35	0.35	-	-	0.26
	Nimocast PE10	-	-	56.4	20	-	-	6	-	-	-	-	-	9
	Nimocast PD16	-	-	43.8	16.5	-	34	3.3	0.06	-	-	1.2	1.2	-
	Nimocast PK24	-	-	61.1	9.5	15	-	3	0.17	-	-	5.5	4.7	1
	Nimocast 842	-	-	57.7	22	10	-	10	0.3	-	-	-	-	-
	Nimocast 713	-	-	72.6	13.4	-	-	4.5	0.12	-	-	6.2	1	2.3
	Nimonic 86	-	-	65	25	-	-	10	-	-	-	-	-	-
	Nimonic 95	-	-	49.9	19.5	-	5	-	0.11	-	1	2	3.5	-
	Nimonic 101	-	-	48	24.2	19.7	-	1.5	-	-	-	1.4	3	-
	Nimonic 242	-	-	58	21.5	10	-	10.5	-	-	-	-	-	-
	Nimonic PE11	-	-	39	18	-	34	5.2	-	-	-	0.8	2.3	-
	Nimonic PE13	-	-	49	21.8	1.5	18.5	9	0.1	0.5	0.5	-	-	0.6
	Nimonic PK25	-	-	49.9	19	19.5	-	4	0.08	0.8	0.8	2.9	2.9	-
	Nimonic PK31	-	-	53.8	20	14	-	4.5	-	-	-	0.4	2.3	5
	Refractaloy 26	-	-	38	19	20	16	3.2	0.03	0.8	1	0.2	2.75	-
	Multimet N155	-	-	21	22.5	21	-	3.5	0.16	2	1	-	-	4.5
	Invar 36	-	-	36	0.25	0.5	62	-	0.15	0.6	0.4	-	-	1
	Invar 42	-	-	41	-	-	56	-	0.5	0.4	-	-	-	1
	Rene 63	-	-	54.4	14	15	0.5	6	0.05	0.1	0.2	3.8	2.5	3.5
	Rene 77	-	-	57.6	15	15	0.4	4.2	0.17	0.1	0.1	4.3	3.3	-
	Rene 80	-	-	61	14	9.5	-	4	0.15	-	-	-	0	8
	Rene 95	-	-	64.5	14	8	-	3.5	0.15	-	-	-	2.5	3.5
	Rene 100	-	-	60.6	10	15	-	3	0.18	-	-	5.5	4.7	-
	Rene 125	-	-	60	8.9	10	-	2	0.1	-	-	4.7	2.5	7
	TRW 1800	-	-	70	13	-	-	-	0.1	-	-	6	0.06	10.5
	TRW V1 A	-	-	70.5	6	7.5	-	2	0.13	-	-	5.4	1	6.3
	Udimar 250	-	-	18	-	8	68	5	-	-	-	0.1	0.4	-
	Udimar 300	-	-	18.5	-	9	66	5	-	-	-	0.1	0.7	-
Udimet 520	-	-	56	19	12	-	6	-	-	-	2	3	1	
Udimet 630	-	-	41	17	-	17.5	3	0.04	-	-	0.6	1.1	4.1	
Udimet 700	-	-	54.6	15	17.5	-	-	0.1	-	-	4.4	3.4	-	
Udimet 710	-	-	55	18	15	0.5	1.5	0.07	-	-	2.5	5	1.5	
Udimet 720	-	-	56	16	14.7	-	3	-	-	-	2.5	5	1.3	
Udimet alloy D979	-	-	45	15	-	27	4	-	-	-	1	3	4	
Udimet L-605	-	-	10	20.5	50	3	-	-	1.5	-	-	-	15	
Udimet alloy R41	-	-	55	19	11	-	10	-	-	-	1.5	3.1	-	
Annealed or Solution Treated	Hastalloy B	140	-	64.3	0.6	1.25	5.5	28	0.1	0.8	0.7	-	-	-
	Hastalloy B-3	-	-	65	1.5	3	1.5	28.5	0.01	3	0.1	0.5	-	1
	Hastalloy C	200	-	54.1	16	1.25	5.75	17	0.07	0.8	0.7	-	-	4
	Hastalloy C-22	-	-	56	22	2.5	3	-	-	0.5	0.1	-	-	3.8
	Hastalloy C-22HS	-	-	74	22	1	2	-	-	-	-	-	-	0
	Hastalloy C-276	-	-	57	16	2.5	5	16	0.01	1	0.1	-	-	1
	Hastalloy N	-	-	72.2	7	0.25	3	16.5	0.06	0.4	0.25	0.5	-	0.21
	Hastalloy W	-	-	62.7	5	1.25	5.5	24.5	0.06	0.5	0.5	-	-	-
	Hastalloy X	160	-	47.1	22	1.5	18.5	9	0.1	0.6	0.6	-	-	0.6
	Incoloy A-286	-	-	25.5	15	-	56.5	-	-	-	-	-	2.1	-
	Incoloy 800	-	-	35	23	-	39.5	-	0.1	-	-	0.6	0.6	1.8
	Incoloy 804	-	-	41	29.5	-	26	-	0.1	1	0.75	0.25	0.6	0.5
	Incoloy 825	180	-	42	21	-	30	3	0.04	-	-	-	1	2
	Inconel 600	170	-	75	15.5	-	8	-	0.05	-	-	-	-	-
	Inconel 601	150	-	60	23	-	14	-	0.05	-	-	1.4	-	-
	Inconel 604	180	-	74.4	15.8	-	7.2	-	0.04	0.2	0.2	-	-	0.1
	Inconel 625	180	-	61	21.5	-	2.5	9	0.04	0.5	0.5	0.4	0.4	3.6
	Inconel 625 CLF	-	-	61	21.5	-	2.5	9	-	-	-	-	-	3.6
	Monel 400	110	-	64	-	-	1.5	-	0.12	1	-	-	-	32
	Monel R-405	110	-	66	-	-	1.2	-	0.15	1	-	-	-	31.06
Nimonic 75	170	-	75	19.5	-	4	-	0.12	-	-	-	0.4	-	

USA		UK	France	Germany		Others
SAE	AMS	BS	AFNOR	Werkst.-Nr	DIN1706	
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	5542	-	NC15TNbA	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	5536	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	NiFe33Cr17Mo	-
-	5397	-	NK15CAT	LW2.4674	-	-
5391A	-	HC204	NC13AD	2.467	S-NiCr13Al6MoNb	-
-	-	3146	-	-	-	-
-	-	HC6,204	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
5536E	5754E	-	NC22FeD	2.4665	NiCr22Fe18Mo	-
5751A	5753	-	NKOD20ATU	2.4666	NiCr18CoMo	-
-	-	-	-	-	-	-
-	-	-	Z6NKCdT38	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	NC14K8	-	-	-
-	-	-	-	-	NiCo15Cr10MoAlTi	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	NiTa9Co8W6CrAl	-
-	6512	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	2.4668	NiCr19NbMo	-
-	-	-	NCKD20AT	2.4636	NiCo15CrMoAlTi	-
-	-	-	NC18TDA	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	5759	-	-	-	-	-
-	-	-	-	-	-	-
5396A	5596	-	NC37FeV	2.4800	S-NiMo30	M10001
-	-	-	-	-	-	-
5388C	5388	-	-	2.4602	NiCr17Mo17FeW	M10002
-	-	-	-	-	-	-
-	-	-	-	-	-	-
5771	5607	-	-	-	-	M10003
-	5786	-	-	-	-	M10004
5390A	5390	3072-76	NC22FeD	2.4603	-	N06002
-	-	-	-	-	-	-
-	-	3072-76	-	-	-	-
-	-	-	NC21FeDU	2.4858	NiCr21Mo	N08825
5540	5580	-	NC15Fe	2.4816	NiCr15Fe	N06600
-	5715	-	-	2.4851	NiCr23Fe	N06601
-	-	3072-76	-	-	-	-
-	5666	-	NC22FeDNB	2.4856	NiCr22Mo9Nb	N06625
-	5879	-	-	-	-	-
4544	4574	HR5,203-4	NU30	2.436	NiCu30Fe	N04400
4674	7234	-	-	-	-	N04405
-	-	-	NC20T	2.463	NiCr20Ti	-

TECHNICAL DATA

COMPARISON OF WORK-PIECE (NI-BASED HEAT RESISTANT ALLOYS)

Material Condition	Commercial designation	Hardness Brinell HB		Nominal composition Approximate content in %										
		Ann.	Aged	Ni	Cr	Co	Fe	Mo	C	Mn	Si	Al	Ti	Others
Aged or Solution Treated and Aged	Astrolay	-	-	56.9	15	15	-	5.25	0.06	-	-	4	3.5	0.05
	Hastelloy R235	-	-	61	15	2.5	10	5.5	0.15	0.25	0.6	3	2	-
	AerMet 100	-	-	11.1	3.1	13.4	70	1.2	0.23	-	-	-	0.05	-
	Incoloy 901	180	300	44.3	12.5	-	34	6	0.05	0.24	0.12	0.15	2.7	0.15
	Incoloy 903	-	380	39	-	15	41	-	0.02	-	-	0.7	1.4	3
	Incoloy 909	-	-	38	-	13	42	1.25	-	-	0.4	0	1.5	4.7
	Incoloy MA 956	-	-	-	20	-	74	-	-	-	-	4.5	0.5	0.5
	Inconel 700	-	350	46	15	23.5	0.7	3.75	0.12	0.1	0.3	3	2.2	-
	Inconel 702	-	-	79.6	15.6	-	0.35	-	0.04	0.05	0.2	3	0.7	-
	Inconel 706	-	-	42	16	-	40	-	0.03	0.2	0.3	0.4	1.75	-
	Inconel 713	-	-	75	12.5	-	-	4.2	0.12	-	-	6.1	0.8	-
	Inconel 718	180	380	52.5	19	-	19	3	0.04	0.35	0.35	0.9	0.9	0.1
	Inconel 718 SPF	-	-	54	18	-	18.5	3	-	-	-	-	1	5
	Inconel 722	-	380	74.8	15	-	6.5	-	0.04	0.55	0.2	0.6	2.4	-
	Inconel X-750	-	390	73	15.5	-	7	-	0.04	0.35	0.35	0.7	2.5	-
	Inconel 751	-	-	70	15.5	-	7	-	0.1	1	0.5	1.5	2.6	0.5
	Jethete M-152	-	-	2.5	16.8	-	-	1.8	0.12	0.7	0.18	-	-	0.6
	Jethete M-252	-	320	55.3	20	10	-	10	0.15	0.5	0.5	1	2.6	-
	MAR-M 246	-	270	59.5	9	10	0.2	2.5	0.15	-	-	5.5	1.5	11.5
	MAR-M 421	-	-	62.3	15.5	10	-	1.7	0.15	-	-	4.3	1.75	5.3
	MAR-M 432	-	-	52.3	15.5	20	-	-	0.15	-	-	2.8	4.3	5
	Monel K-500	120	290	64	-	-	1	-	0.13	0.8	-	2.8	0.6	30
	Nimocast 80	-	-	69.9	20	2	5	-	0.1	-	-	1	2	-
	Nimocast 90	-	-	52.9	20	18	5	-	0.1	-	-	1.5	2.5	-
	Nimonic 80A	-	350	75	19.5	-	-	-	0.08	-	-	1.4	2.4	-
	Nimonic 90	-	346	59	19.5	16.5	-	-	0.08	-	-	1.5	2.5	-
	Nimonic 105	-	320	53	15	20	-	5	0.12	-	-	4.7	1.2	-
	Nimonic 115	-	350	59	14.2	13.2	-	4	0.16	-	-	5	4	-
	Nimonic 901	-	350	44	12.5	-	35	5.7	0.04	-	-	0.3	2.9	-
	Nimonic 263/C263	-	275	51.5	20.2	20	-	6	0.06	-	-	0.5	2	-
	Nimonic PE16	-	250	43.5	16.5	-	34	3.3	0.06	-	-	1.2	1.2	-
	Nimonic PK33	-	350	55.9	18	14	0.5	7	0.05	0.25	0.25	2.1	2.2	-
	R-235	-	-	63.3	15	1.2	10	5.5	0.12	0.1	0.3	2	2.5	-
	Rene 41	-	-	53.1	19	11	1.8	10.5	0.09	0.3	0.3	1.5	3.1	-
	Udimet 500	-	-	51.7	19	19	-	4	0.4	0.1	0.1	3	3	-
	Udimet 718	180	380	52.5	18	-	18	3	0.05	-	-	0.6	0.1	5.2
	Waspaloy	-	HRC35-42	56.9	19.8	13.5	0.8	4.45	0.07	0.1	0.1	1.4	3	-
Cast or Cast and Aged	GMR 235	-	-	63.3	15.5	-	10	5.2	0.15	0.25	0.6	3	2	0.06
	GMR 235D	-	-	63	15.5	-	4.5	5	0.15	0.1	0.3	3.5	2.5	0.05
	IN-100	-	-	61.6	10	15	-	3	0.18	1.2	0.5	5.5	4.75	-
	Jessop G39	130	-	67.5	19.5	-	5	3	0.5	-	-	-	-	4.5
	Jessop G64	220	-	60.7	11	-	2	3	0.15	-	-	6	-	4
	Jessop G81	-	300	79.3	20	13	-	-	0.05	-	-	1.3	2.3	-
	MAR-M200	-	-	69.4	9	10	-	-	0.15	-	-	5	2	13.5

USA		UK	France	Germany		Others
SAE	AMS	BS	AFNOR	Werkst.-Nr	DIN1706	
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	5660	-	ZSSNCDT42	LW2.4662	NiFe35Cr14MoTi	N09901
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	NK27CADT	-	NiCo29Cr15MoAlTi	-
-	5550	-	-	-	-	N07702
-	5702	-	-	-	-	N09707
-	5391	Mar-46	NC12AD	LW2.4670	S-NiCr13Al6MoNb	-
5383	5589	HR8	NC19FeNB	LW2.4668	NiCr19Fe19NbMo	N07713
-	5596G	-	-	-	-	-
-	5541	-	NC16FeTi	-	NiCr16FeTi	N07722
5542G	5582	-	NC16FeTNb	2.4669	NiCr16FeTi	N07750
-	-	-	-	-	-	N07751
-	-	-	-	-	-	-
-	5551	-	-	2.4916	S-NiCr19Co	N07252
-	-	-	-	2.4675	NiCo10W10Cr9AlTi	-
-	-	-	-	-	NiCr16Co10WAlTi	-
-	-	-	-	-	NiCo20Cr16WAlTi	-
4676	-	3072-76	-	2.4375	NiCu30Al	N05500
-	-	3146	-	-	-	-
-	-	-	-	-	-	-
-	-	Hr401,601	NC20TA	2.4631	NiCr20TiAl	N07080
-	-	Hr2,202	NC20TAV	2.4632	NiCr20Co18Ti	N07090
-	-	HR3	NCKD20ATV	2.4634	NiCo20C15MoAlTi	-
-	-	HR4	NCK15ATD	2.4636	NiCo15C15MoAlTi	-
5660C	5661A	-	ZSNCDT42	2.4662	NiCr15MoTi	-
-	-	HR10	NCK20D	2.465	NiCr15Co19MoTi	-
-	-	HR207	NW11AC	-	NiFe33Cr17Mo	-
-	-	-	NC19KDUV	-	NiCr20Co16MoTi	-
-	-	-	-	-	-	-
-	5399	-	NC19KDT	2.4973	NiCr19Co11MoTi	N07041
-	5751	-	NCK19DAT	2.4983	NiCr18Co11MoTi	N07500
5383	5589	HR8	NC19FeN	LW2.4668	NiCr19Co19NbMo	N07718
-	5544	-	NC20K14	LW2.4668	NiCr19Co19NbMo	N07001
-	-	-	-	-	-	AISI:686
-	-	-	-	-	NiCr16MoAl	-
-	5397	-	-	LW2.4674	NiCo15Cr10MoAlTi	N13100
-	-	-	-	-	NiCr20MoW	-
-	-	-	-	-	NiCr11AlWNb	-
-	-	-	-	-	NiCr20Co18Ti	-
-	-	-	-	-	NiW13Co10Cr9AlTi	-

TECHNICAL DATA

COMPARISON OF WORK-PIECE (NI-BASED HEAT RESISTANT ALLOYS)

Material Condition	Commercial designation	Hardness Brinell HB		Nominal composition Approximate content in %										
		Ann.	Aged	Ni	Cr	Co	Fe	Mo	C	Mn	Si	Al	Ti	Others
Co-based Alloys	Air Resist 13	-	-	1	-	79.6	2.5	-	11	-	-	3.5	-	4.12
	Air Resist 213	-	-	-	19	65.8	-	-	4.7	-	-	3.5	-	6.68
	Altemp S 816	-	-	20	20	47.6	-	4	4	-	-	-	-	0.4
	STELLITE 6	-	-	-	26	72	-	-	5	-	-	-	-	-
	FSX 414	-	-	10	29	52.8	1	-	7	-	-	-	-	0.25
	Haynes 36	-	-	10	18.5	52.8	2	-	14.5	1.2	0.6	-	-	0.4
	Haynes 151	-	-	-	20	65.6	-	-	12.8	0.5	0.5	-	0.15	0.47
	HS 25	-	-	10	20	48.4	3	-	15	1.5	2	-	-	0.1
	HS 30	-	-	16	24	51.4	1	6	-	0.6	0.6	-	-	0.4
	HS 31	-	-	10	25	53.8	1.5	-	8	0.6	0.8	-	-	0.4
	HS 36	-	-	10	18	53.1	2	-	15	1.5	-	-	-	0.4
	Inconel 783	-	-	28.5	3	34	26	-	-	-	-	5.4	0.1	3
	Jessop 832	-	-	12	19	44	17	2	-	0.8	0.3	-	-	3.5
	Jessop 834	-	-	12	19	42	20	2	-	-	-	-	-	6.5
	Jessop 865	-	-	10.5	25.5	53	2	-	7.5	0.6	0.6	-	-	0.45
	Jessop 875	-	-	-	21	66	-	-	11	-	-	-	-	2.45
	Jessop 887	-	-	10	20	50	3	-	15	0.5	1.5	-	-	0.1
	Jetalloy 209	-	-	10	20	52	1	-	15	-	-	-	2	0.02
	L-251	-	-	10	19	56	1	-	14	-	-	-	-	0.4
	L-605	-	-	10	20	51	1.6	-	15	1.5	0.6	-	-	0.1
	M 203	-	-	25	20	38	1.6	-	12	0.8	1	0.7	2	1.67
	M 204	-	-	25	18	42	1.6	-	12	-	-	-	-	1.27
	M 205	-	-	25	18	40	1.6	-	12	-	-	2.7	-	1.67
	ME16	-	-	-	15	23	2	5	-	-	-	5	-	22.25
	MP35N	-	-	37	21	29.2	1	10.5	-	0.15	0.15	-	1	0.04
	NF3	-	-	-	14.3	22.4	-	3.9	-	-	-	4.8	4.6	17.9
	MAR-M 302	-	-	-	21.5	57	0.75	-	10	0.1	0.2	-	-	10
	MAR-M 322	-	-	-	21.5	60	0.75	-	9	0.1	0.1	-	0.75	7.7
	MAR-M 509	-	-	10	23	55	-	-	7	0.05	0.05	-	0.2	4.6
	MAR-M 905	-	-	20	20	55	-	-	-	-	-	-	0.5	7.65
	MAR-M 918	-	-	20	20	52	0.4	-	-	0.1	0.1	-	0.5	7.65
	Refractaloy 70	-	-	20	21	46	0.5	8	4	-	-	-	-	0.08
	Udimet 188	-	-	22	22	38	3	-	14	1.25	-	-	-	-
	V-36	-	-	20	25	43.2	2.4	4	2	0.6	0.5	-	-	2.29
	WI-52	-	-	0.5	21	62.6	2	-	11	0.25	0.25	-	-	2.45
	Jessop X-40	-	-	10.5	25.5	53	1.5	-	7.5	0.75	0.75	-	-	0.5
	Jessop X-45	-	-	10.5	25.5	54.7	2	-	7	-	-	-	-	0.25
	Jessop X-50	-	-	20.5	25.5	40.3	4	-	12	-	-	-	-	0.75
	Jessop X-63	-	-	10	25	57.6	1	6	-	-	-	-	-	0.45
Annealed or Solution Treated	J 1650	-	-	27	19	38	-	-	12	-	-	-	-	0.2
In Aged Condition	Haynes 25	-	-	10	20	49	3	-	15	0.5	0.5	-	-	0.1
	Haynes 188	-	-	22	22	38	2.5	-	14	0.4	0.4	-	-	0.1
	HS 6	-	-	2.5	28	60.5	3	-	5	-	-	-	-	1
	HS 21	-	-	3	27	62.6	2	5	-	0.6	0.6	-	-	0.25
	J 1570	-	-	28	19	39	2	-	7	-	-	-	-	-

USA		UK	France	Germany		Others
SAE	AMS	BS	AFNOR	Werkst.-Nr	DIN 1706	
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	(5534)	-	-	LW2.4989	CoCr20Ni20W	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	CoCr19W14NiB	-
-	-	-	-	-	CoCr20W13	-
-	5759	-	KC20WN	LW2.4964	CoCr20W15Ni	-
5380	-	-	-	-	CoCr25NiW	R30030
5382	-	3146	-	LW2.4670	CoCr25NiW	R30031
-	-	-	-	-	CoCr19W14NiB	-
-	5940	-	-	-	-	-
-	-	-	-	-	CoCr19Fe16NiMoVNB	-
-	-	-	-	-	CoCr19Fe20NiMoVNB	-
-	-	-	-	-	CoCr25NiW	-
-	-	-	-	-	CoCr21W11Nb	-
-	-	-	-	-	CoCr20W15Ni	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	5759	-	-	2.4964	CoCr20W15Ni	R30605
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	5844	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	CoCrW10TaZrB	-
-	-	-	-	-	CoCr22W9TaZrNb	-
-	-	Mar-46	-	-	CoCr24Ni10WTaZrB	-
-	-	-	-	-	-	-
-	-	-	-	-	CoCr20Ni20Ta	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	CoCr25NiMoWNB	-
-	-	-	-	-	CoCr12MoW	-
-	5382	3156-2	-	LW2.4670	CoCr25NiW	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
5537C	5759	-	KC20WN	LW2.4954	CoCr20W15Ni	-
-	5772	-	KC22WN	-	CoCr22W14Ni	-
-	5373	-	-	-	-	R30006
-	5385	3531	-	-	CoCr29Mo	R30021
-	-	-	-	-	-	-

INDEX

A/B

ARE01	MILLING & DRILLING	266
ARE02	MILLING & DRILLING	266
BSN	CERMET	102
BTN	CERMET	102

C

CCBN	TOOL HOLDER	145
CCGW	CERAMIC	30
CCGW	PCBN	110
CCGW	PCD	114
CCGX	CERAMIC	29
CCKN	TOOL HOLDER	146
CCLN	TOOL HOLDER	144
CCMT	CERMET	91
CDH	CERAMIC	52
CDHN	TOOL HOLDER	147
CDJN	TOOL HOLDER	148
CDNN	TOOL HOLDER	149
CEFN	TOOL HOLDER	150
CEGN	TOOL HOLDER	151
CEJN	TOOL HOLDER	152
CFLN	TOOL HOLDER	182
CGVN	TOOL HOLDER	184
CINN	TOOL HOLDER	185
CLKN	TOOL HOLDER	181
CNGA	CERAMIC	24
CNGA	PCBN	110
CNGA	PCBN	114
CNGA	PCD	120
CNGN ..AZ	CERAMIC	74
CNGN	CERAMIC	26
CNGN	PCBN	118
CNGX	CERAMIC	28
CNMA	CERAMIC	25
CNMG	CERMET	86
CNMN	CERAMIC	27
CNMX ..RD	CERAMIC	29
CNMX	CERAMIC	29
CNVX	CERAMIC	28
CPGN	CERAMIC	31
CPGT	CERMET	91
CPGW	PCD	120
CRDB	TOOL HOLDER	155
CRDC	TOOL HOLDER	156
CRDN	TOOL HOLDER	153
CRGN	TOOL HOLDER	154
CSBF	TOOL HOLDER	173
CSBN	TOOL HOLDER	157
CSBR	TOOL HOLDER	174

CSC	MILLING CUTTER	234
CSDN	TOOL HOLDER	158
CSGF	TOOL HOLDER	175
CSGR	TOOL HOLDER	176
CSKN	TOOL HOLDER	159
CSRC	TOOL HOLDER	166
CSRN	TOOL HOLDER	160
CSSC	TOOL HOLDER	167
CSSF	TOOL HOLDER	177
CSSN	TOOL HOLDER	161
CSSR .. N	TOOL HOLDER	179
CSSR	TOOL HOLDER	178
CSTP	TOOL HOLDER	168
CSVN	TOOL HOLDER	183
CSYN	TOOL HOLDER	162
CTFN	TOOL HOLDER	163
CTFP	TOOL HOLDER	169
CTGN	TOOL HOLDER	164
CVJN	TOOL HOLDER	171
CVVN	TOOL HOLDER	172
CWF/R	TOOL HOLDER	180
CWLN	TOOL HOLDER	165

D

DCGW	CERMET	91
DCGW	PCBN	114
DCGW	PCBN	110
DCGW	PCD	121
DCGX	CERAMIC	34
DNGA	CERAMIC	32
DNGA	PCBN	115
DNGA	PCBN	110
DNGA	PCD	120
DNGG	CERMET	94
DNGN	CERAMIC	33
DNGX	CERAMIC	34
DNMA	CERAMIC	32
DNMG	CERMET	87
DNMX	CERAMIC	34

E/F

ENGN	CERAMIC	35
FBC	MILLING & DRILLING	270
F-Series	CERAMIC	53
F-Series	CERAMIC	53
F-Series	CERAMIC	54
F-Series	CERAMIC	54

G/H

GVGN	CERAMIC	77
HFC01	MILLING & DRILLING	268

HFC01	MILLING & DRILLING	268
HNEN	CERAMIC	66
HPA - H	MILLING CUTTER	238
HPA - I	MILLING CUTTER	237
HPA - M	MILLING CUTTER	239
HRCd	TOOL HOLDER	170

I/J

INGN	CERAMIC	80
INGN	CERMET	103
JSFD 2×D	MILLING & DRILLING	275
JSFD 3×D	MILLING & DRILLING	276
JSFD 4×D	MILLING & DRILLING	277
JTR 2×D	MILLING & DRILLING	272
JTR 3×D	MILLING & DRILLING	273
JTR 4×D	MILLING & DRILLING	274

L/O/Q

LNE	CERAMIC	66
LNJ	CERAMIC	55
OEGB	CERAMIC	67
OMR07	MILLING & DRILLING	271
OPEN	CERAMIC	67
QCB - H	MILLING CUTTER	244
QCB - I	MILLING CUTTER	243

R

RBGN	CERAMIC	39
RBGX	CERAMIC	56
RCGN	CERAMIC	39
RCGX	CERAMIC	56
RCGX	PCBN	117
RCGX	PCBN	117
RNGA	PCBN	119
RNGN	CERAMIC	36
RNGN	PCBN	117
RNGN	PCBN	118
RNGX .. DP	CERAMIC	38
RPGA	CERAMIC	37
RPGN	CERAMIC	37
RPGN	PCBN	117
RPGX .. DP	CERAMIC	38
RPGX	CERAMIC	57
RXGX	CERAMIC	57

S

SBAR	CERMET	106
SBE .. 1C	PCBN/PCD	134
SBE .. 2C	PCBN/PCD	134
SCGN .. MZ	CERAMIC	77
SCGN .. WZ	CERAMIC	76

SCGN .. XZ	CERAMIC	76
SCGN .. ZZ	CERAMIC	76
SCGN	CERAMIC	43
SCGW .. FS	PCBN	113
SCGW	CERAMIC	43
SCGW	PCBN	111
SCGW	PCBN	115
SCGW	PCD	121
SCGX	CERAMIC	43
SDCN .. T	CERAMIC	69
SDCN	CERAMIC	69
SDCN	CERMET	97
SDCW	CERAMIC	69
SDEN	CERMET	97
SDEW	CERMET	98
SDKN	CERMET	97
SEAN .. NW	CERAMIC	70
SEAN .. T	CERAMIC	70
SEAN	CERAMIC	70
SEHW	CERMET	98
SEKN .. R	CERMET	99
SEKN	CERMET	99
SEXP	MILLING CUTTER	232
SFAN .. 75	MILLING CUTTER	206
SFAN .. 88	MILLING CUTTER	204
SFCN .. 00 .. R	MILLING CUTTER	220
SFCP .. 00 .. R	MILLING CUTTER	222
SFE .. 1C	PCBN/PCD	133
SFE .. 2C	PCBN/PCD	133
SFKN .. 45	MILLING CUTTER	196
SFKN .. 75	MILLING CUTTER	194
SFKN .. 88	MILLING CUTTER	192
SFKN .. HX	MILLING CUTTER	214
SFKP .. 45	MILLING CUTTER	202
SFKP .. 75	MILLING CUTTER	200
SFKP .. 88	MILLING CUTTER	198
SFKP .. MF	MILLING CUTTER	216
SFMS .. LRF	MILLING CUTTER	218
SFSP .. OT	MILLING CUTTER	212
SFSX .. 00 .. EC	MILLING CUTTER	208
SFSX .. 70 .. EC	MILLING CUTTER	210
SFXN	MILLING CUTTER	224
SFXP	MILLING CUTTER	226
SGF	CERAMIC	59
SGR	CERAMIC	59
SNCN .. ENTN	CERAMIC	68
SNCN .. GZ	CERAMIC	75
SNCN .. KZ	CERAMIC	75
SNCN .. ZZT	CERAMIC	75
SNCN	CERAMIC	68
SNGA	CERAMIC	40

INDEX

SNGA	PCBN	114
SNGA	PCBN	111
SNGA	PCD	119
SNGF	CERAMIC	80
SNGG	CERMET	94
SNGL	CERMET	94
SNGN .. ING	CERAMIC	68
SNGN3812R	CERAMIC	55
SNGN	CERAMIC	41
SNGN	PCBN	111
SNGN	PCBN	118
SNGN	PCD	121
SNGX	CERAMIC	42
SNK	CERMET	98
SNMA	CERAMIC	40
SNMG	CERMET	88
SNMX .. RD	CERAMIC	42
SNMX	CERAMIC	42
SNMX	CERAMIC	79
SPCN .. T	CERAMIC	71
SPCW	CERAMIC	71
SPEN	CERAMIC	71
SPGN	CERAMIC	44
SPGN	PCD	122
SPGT	CERMET	92
SPGW	PCD	122
SPHX	CERAMIC	72
SPKN .. SP	CERAMIC	72
SPKN	CERAMIC	72
SPKN	CERMET	99
SPMW	CERMET	93
SSF	CERAMIC	60
SSR	CERAMIC	60
SVW	CERAMIC	78
SYBF	CERAMIC	58
SYBR	CERAMIC	58
SZT 5810	CERAMIC	79
SPIDC	DRILLING	280

T

TBGW	PCD	122
TCGW	PCBN	112
TCGW	PCD	123
TCUN	CERAMIC	47
TEKN	CERAMIC	73
TEKN	CERMET	100
TNCN	CERAMIC	73
TNGA	CERAMIC	45
TNGA	PCBN	119
TNGA	PCBN	115
TNGA	PCD	122

TNGG .. F	CERMET	95
TNGG .. FS	CERMET	95
TNGG	CERMET	95
TNGN	CERAMIC	46
TNGN	PCBN	118
TNMG .. 2G	CERMET	96
TNMG	CERMET	89
TPGB	PCBN	112
TPGB	PCD	123
TPGN	CERAMIC	48
TPGN	PCBN	112
TPGN	PCD	123
TPGR	CERMET	93
TPGT .. KC	CERMET	92
TPGT	CERMET	92
TPGT	PCD	124
TPGW	PCBN	115
TPGW	PCBN	112
TPGW	PCD	124
TPKN	CERAMIC	73
TPKN	CERMET	100
TPUN	CERAMIC	48

V

VBGW	PCBN	116
VBGW	PCBN	113
VBGW	PCD	124
VCGW	PCBN	113
VCGW	PCD	125
VNGA	CERAMIC	49
VNGA	PCBN	116
VNGA	PCBN	113
VNGA	PCD	124
VNGN	CERAMIC	49
VNGX	CERAMIC	50

W/X/Y

WFC	CERAMIC	61
WFP	CERAMIC	63
WNGA	CERAMIC	51
WNGX	CERAMIC	51
WNMG	CERMET	90
WRC	CERAMIC	62
WRP	CERAMIC	64
WIDC	DRILLING	284
XCET	CERMET	100
YCE	CERMET	100

MEMO

MEMO



Best Choice for High Productivity by Union





OCI building 12FL. #94, Sogong-Ro, Jung-Gu, Seoul 04532, Korea

Domestic TEL. (82)2-2251-4152, 4158 FAX. (82)2-318-1995

Int'l TEL. (82)2-2251-4142~4149 FAX. (82)2-318-1995

E-mail ceramic@unionmaterials.com

www.unionmaterials.com

www.cerabit.com

AD-2212-JC