


UTILIS
multidec[®]
swiss type tools

ENGLISH 

multidec[®]-CUT

G-LINE INSERTS

THE PERFORMANCE BOOST IN MACHINING!

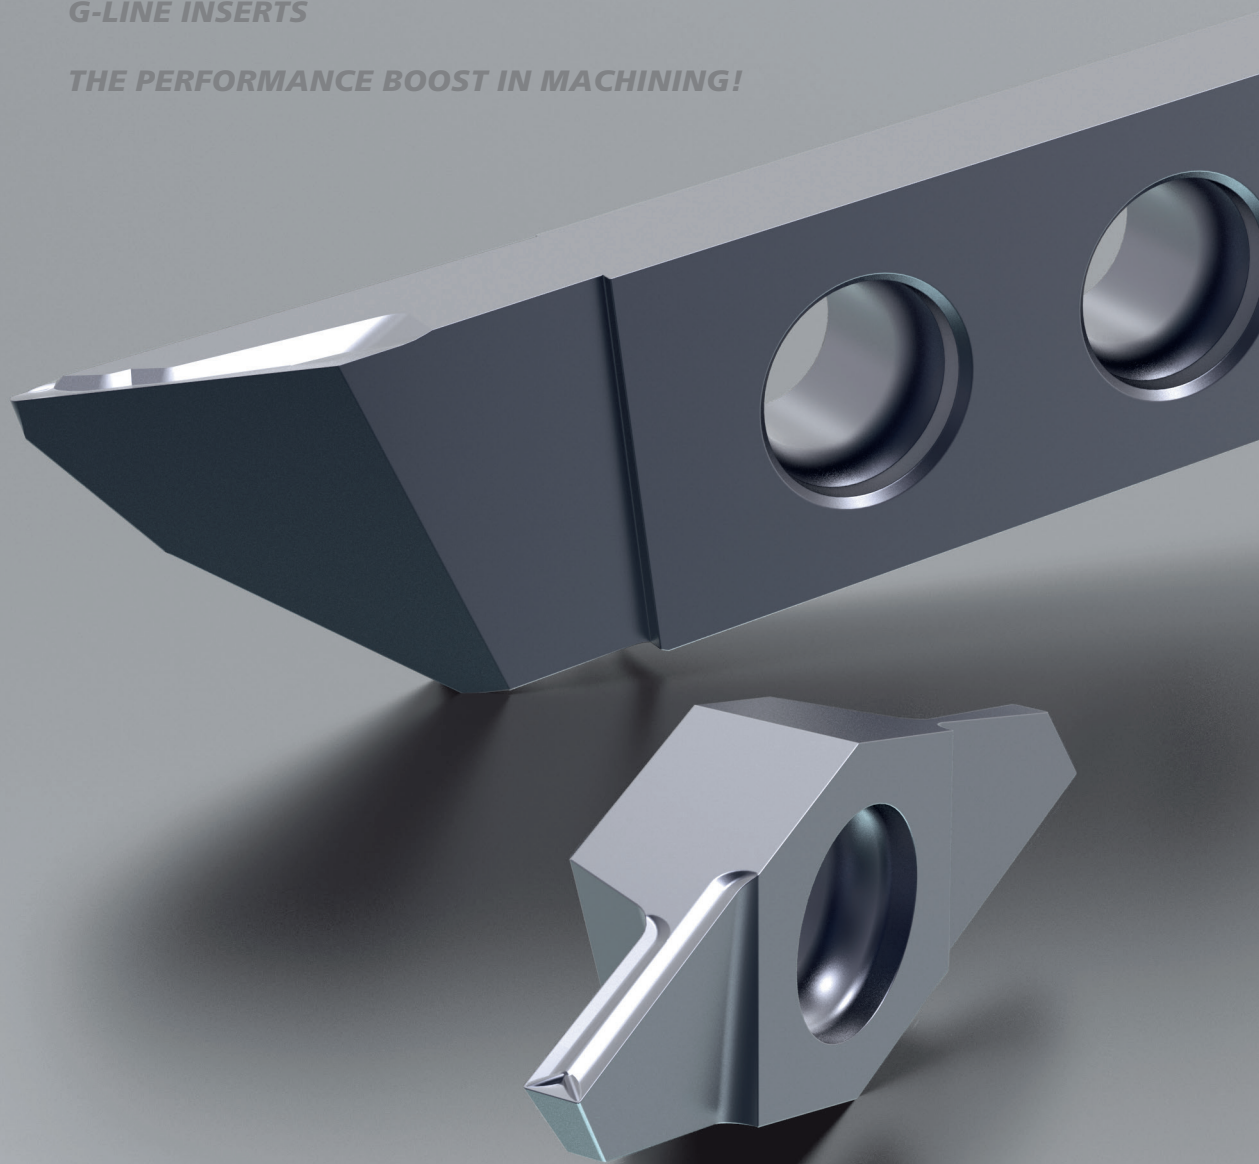

INNOVATION

future since **1915**

UTILIS[®]
Tooling for High Technology



Free form chip breakers for small part manufacturing and micro cutting

With a focus on high productivity, process reliability, and the longest possible tool life, perfect chip control becomes a central issue in all modern production. These requirements are often difficult to fulfill with traditionally ground chip breakers because of insufficient chip break and removal.

In comparison to traditional grinding technologies, new manufacturing technologies have increased the degree of design free form tremendously, providing the ability to generate any three-dimensional shape. The new G-Line from multidec® has adopted the use of this new free form design technology, resulting in well thought-out chip breaking geometries that are fitted to the well-tried multidec®-CUT 3000 series of turning inserts, providing maximum performance.

Free form modeled chip breakers achieve significant improvements in a wide range of materials when compared to ground chip breakers. This advantage is particularly evident with difficult to machine materials such as super-alloys. In addition to significantly improved chip control, multidec®-G-Line inserts can achieve up to 30 % higher cutting values and up to 50 % longer tool life.



Advantages:

- improved chip control
- better cutting values
- longer tool life
- smaller chip volume
- better process reliability
- wear-resistant and tough carbide substrate with two heavy-duty coatings
- sharp and rounded cutting edges
- can be used on all multidec®-CUT 1600 and multidec®-CUT 3000 holders

Legend	4
--------	---

Application overview	6
----------------------	---

Use of the chip breakers	7
--------------------------	---

Success stories	8–9
-----------------	-----

G-LINE inserts 1600	
---------------------	--

1602... F. GT20	10
-----------------	----

1602... F.V GT20	11
------------------	----

1602... F.N GT20	12
------------------	----

1603... F. GA20	13
-----------------	----

NEW 1603... F. GM20	14
----------------------------	----

1604... F. GB20	15
-----------------	----

1604... F.V GB20	16
------------------	----

1605... F. GC20	17
-----------------	----

G-LINE inserts 3000	
---------------------	--

3002... F. GS12	18
-----------------	----

3002... F.V GS12	19
------------------	----

3002... F.N GS12	20
------------------	----

3002... E. GT20	21
-----------------	----

3002... E.V GT20	22
------------------	----

3002... E.N GT20	23
------------------	----

3003... E. GA20	24
-----------------	----

NEW 3003... E. GM20	25
----------------------------	----

3004... F... GB20	26
-------------------	----

3004... F.V ... GB20	27
----------------------	----

3005... F/E. GC20	28
-------------------	----

G-LINE cutting specification	29–30
------------------------------	-------

Different information about multidec® application refer to certain machining methods. In addition, simple symbols inform of the product assortment and where additional products and technical information can be found.

Dimensions

All dimensions are in millimeter (mm); native dimensions in inch are calculated into millimeter.

Page information

□ 12... See page 12 and the following (example)

Recommended usage

- Preferred application
- Possible application
- Application not recommended

Availability

- Standard articles
- Standard articles, new in this catalogue
- Discontinued articles

Categorization of materials

The information on using multidec® tools refers to certain materials.

The materials to be machined are categorized in the same color throughout the entire catalog:

Steel (non-alloyed, low alloyed and high alloyed)
Stainless steel
Titanium and Ti-alloys
Non-ferrous metals (gold, aluminum and brass)
Hard materials

Order designation

To the designation of the selected type of product, the desired cutting material code must be added.

Supplementing information to the grades can be found according to the page references (□ ...).


Order designation		Carbide □ 20		
L	R	○	●	●
		○	●	●
		○	●	●
		●	○	—
		—	—	○
		UHM 20	UHM 20 HPX	UHM 20 TX+
1605-0.5-1.5 L ...	1605-0.5-1.5 R ...	■	■	■
1605-1.0-2.5 L ...	1605-1.0-2.5 R ...	■	■	■
1605-1.5-3 L ...	1605-1.5-3 R ...	■	■	■

Example: 1605-0.5-1.5 L UHM 20

Packaging information

The product labels illustrate the content of the packaging and also show the materials on which the cutting insert can be used. For this purpose, UTILIS uses the ISO standard coding.

The UTILIS article number is generally also printed as a barcode on the UTILIS (multidec®) product packaging.

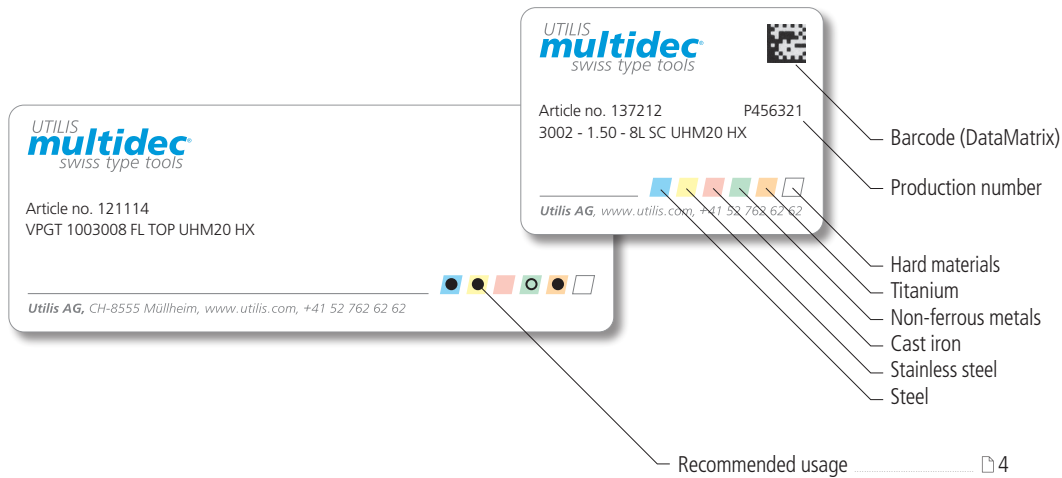


Execution of holder/insert

The side on which the insert is located determines whether it is a "left-" or "right-hand" holder. For this purpose, the holder is viewed with the insert pointing towards the observer.

Pictures

The right-hand version of the tools is usually shown. (Exceptions are possible). The tool colours illustrated here are not binding.

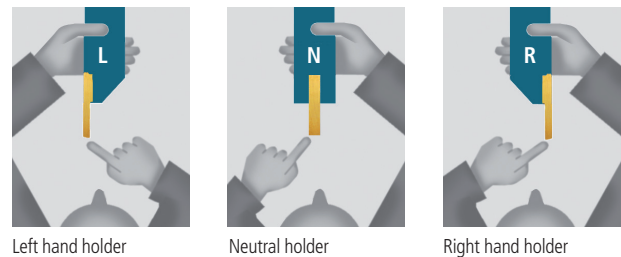

Product lines

To meet today's requirements of modern production it is not necessary to use the most accurate – but to use the tools adapted to the requirements. This means, the more accurate and sophisticated the process, the higher must be the accuracy of the produced tools. Therefore, the product range has been divided into three different accuracy classes. Your advantage: you buy the quality, which is effectively required.

Product line	Description
PREMIUM-LINE	The PREMIUM-LINE includes UTILIS tools with the highest accuracy requirements, especially for the production of micro parts. Tightest dimensional tolerances, precisely executed, highest surface quality and high repeatability are the features of this line. The manufacturing of these high-class tools requires considerable additional cost in production, which justifies the higher price of this product line.
STANDARD-LINE	The STANDARD-LINE meets the highest demands on the quality, which is demanded for Swiss type tools in production of small parts. Tight dimensional tolerances and high surface quality are implemented. These are quality standard tools, which are very well positioning this line in a wide range of applications.
VALUE-LINE	The VALUE-LINE is based on the known positions of our STANDARD-LINE. The most important functional elements – such as inserts and holders – are manufactured with the normal dimensional tolerances seen in the industry. Designed for the production of low-cost components, this line offers optimal quality standards. The greater tolerances and the reduced surface quality lower the production costs considerably, which also lowers the price in comparison to the standard product line.

multidec®-CUT 1600

Front turning, facing, back turning

1603...

Grooving and turning


1605...

Back copy turning

1604...

Cut off

1602...

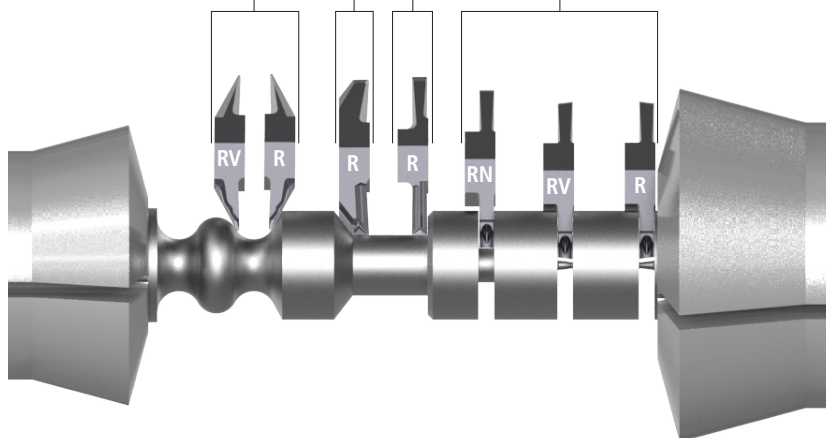

multidec®-CUT 3000

Front turning, facing, back turning

3003...

Grooving and turning


3005...

Back copy turning



3004...

Cut off

3002...

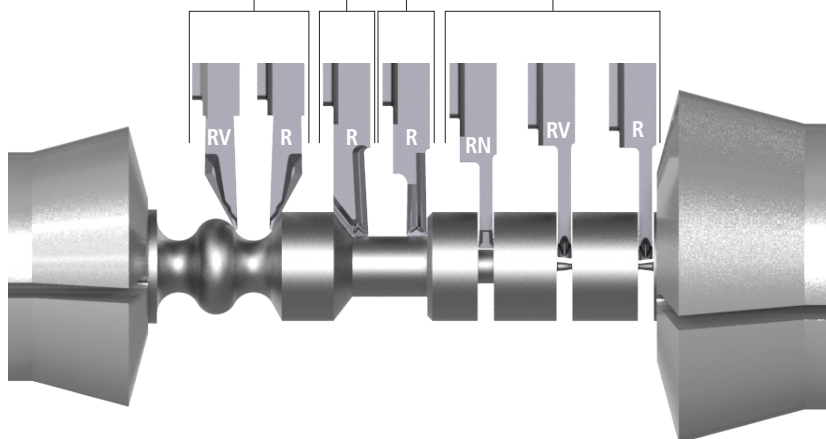


CUT 1600 & CUT 3000

**Cutting off with the GS12 chip breaker**



The "GS12" geometry combines the advantages of the well-tried chip breaker of the "GS" product line with the accuracy of a ground parting-off insert. The sharp cutting edge provides excellent cutting ability. This makes it the number one choice in a wide range of applications in which a soft cut and good chip control are required, also with lower feed rates.

CUT 1600 & CUT 3000


**Cutting off with the GT20 chip breaker**

The "GT20" geometry is another parting-off geometry which is available with a sharp and a slightly rounded cutting edge in comparison to the "GS12". The special design of this chip breaker guarantees excellent chip flow, short chips and generates smooth surfaces on the workpiece, even with higher feed rates.

CUT 1600 & CUT 3000





CUT 1600


**Front turning, facing and back turning with chip breaker GA20**

With the "GA20" geometry, the proven chip breaker of the multidec®-TOP insert was taken as the basis and optimised. A circumferential chip breaker enables turning in three directions. Perfect chip control is guaranteed during facing, turning, grooving solid material and back turning. The cutting edge "TOP" also enables up to 100% high feed.

CUT 1600 & CUT 3000




CUT 1600


**Front turning, facing, back turning and copy turning with chip breaker GM20**

Chip-breaker similar to the "GA20", but without the "TOP" cutting edge, with the advantage of also being able to carry out copying operations and radial clearance turning.

CUT 1600 & CUT 3000





CUT 1600


**Copy turning (rear) with chip breaker GB20**

The "GB20" geometry provides optimum and process-reliable chip formation with both low and higher cutting depths and feed rates with an extremely sharp cutting edge in combination with multi-stage chip breakers.

CUT 1600 & CUT 3000



CUT 1600

**Grooving and turning with chip breaker GC20**

The "GC20" geometry was tailored for facing, grooving and turning operations. Turning in three directions with extremely low and high cutting depths and feed rates requires a very sophisticated chip breaker in order to achieve optimum chip control.


This geometry provides a good solution in almost any material. This geometry even achieves excellent results in lead-free brass, a material with which chip control is difficult.

Operation grooving and turning with the "GC20" chip breaker

In a comparison between the new G-LINE "GC20" chip breaker and a ground chip breaker which has been established for a long time, perfect rolled chips and an extremely neat finish were achieved on the workpiece with consistent cutting data. The tool life was increased by 200 %, from 3000 to 9000 parts.

CHIP REMOVAL COMPARISON


Machine model	Star SR 10 type C
Material number	1.4435
Material specification	X2CrNiMo 18-14-3 (316 L)
Bar diameter (mm)	4
Operation	Grooving and turning
Cooling	Oil

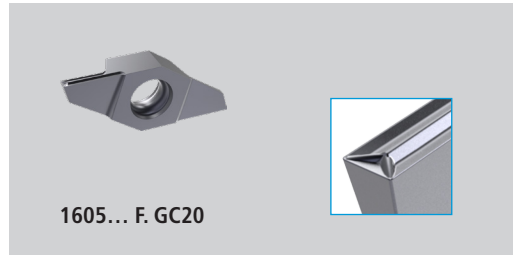**CURRENT**

Insert designation	Ground grooving and turning insert	Brand	Competitor
Cutting speed (Vc)	75 m/min		
Cutting depth (ap)	1.00 mm		
Feed rate (f)	0.01 mm/rev		
Number of workpieces	3000		

UTILIS (multidec-CUT, G-LINE)

Insert designation	1605-1.0-1.5 FL GC20 R05 UHM20 HPX	Brand	UTILIS
Cutting speed (Vc)	75 m/min		
Cutting depth (ap)	1.00 mm		
Feed rate (f)	0.01 mm/rev		
Number of workpieces	9000		

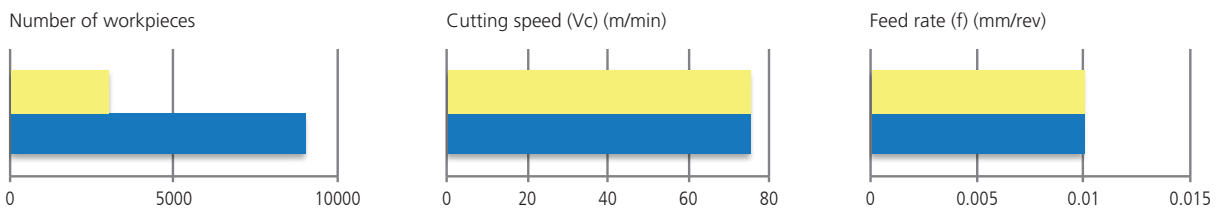SUMMARY

Operation cutting off with chip breaker "GS12"

Here a comparison was made between the "GS12" chip breaker and a competitor chip breaker which had already been successfully used in this material. Because of the better chip flow and short chips, it was possible to increase the tool life considerably with the new G-LINE insert with higher cutting values.

CHIP REMOVAL COMPARISON


Machine model	Citizen M 32
Material number	1.4104
Material specification	X12CrMoS17 (SUS430F)
Bar diameter (mm)	16
Operation	CUT off
Cooling	Oil

**CURRENT**


Insert designation	Sintered CUT off insert	Brand	Competitor
Cutting speed (Vc)	85 m/min		
Cutting depth (ap)	8.00 mm		
Feed rate (f)	0.03 mm/rev		
Number of workpieces	310		

UTILIS (multidec-CUT, G-LINE)

Insert designation	3002-2-10 FLN GS12 UHM20 TX+	Brand	UTILIS
Cutting speed (Vc)	120 m/min		
Cutting depth (ap)	8.00 mm		
Feed rate (f)	0.05 mm/rev		
Number of workpieces	480		

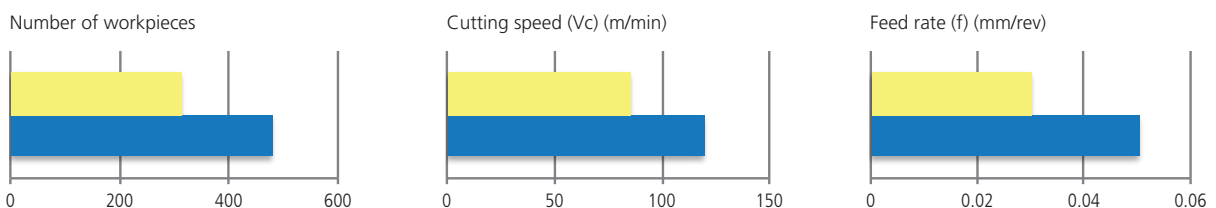SUMMARY


10

UTILIS
multidec
swiss type toolsCUT off
chip breaker "GT20"

1602... F. GT20




F: Insert with sharp cutting edge

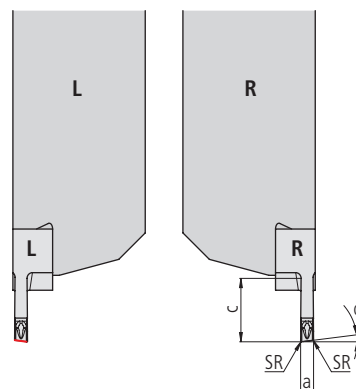

Order designation		Carbide**						Dimensions					Holders**
L	R	-	-	●	○	●	●	a					
		-	●	●	○	●	●						
		○	●	●	○	○	●						
		●	○	-	●	○	-						
		-	-	●	-	-	-						
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+	c	α	SR*			
PREMIUM-LINE													
1602-0.8-5 FL GT20 ...	1602-0.8-5 FR GT20 ...			■	■	■		0.8	5	7°	0.05		1600...
1602-1.0-5 FL GT20 ...	1602-1.0-5 FR GT20 ...			■	■	■		1	5	7°	0.05		1600...
1602-1.5-5 FL GT20 ...	1602-1.5-5 FR GT20 ...			■	■	■		1.5	5	7°	0.05		1600...

* SR: Protection radius


G-LINE cutting specification 29

CUT off (offset)
chip breaker "GT20"


1602... F.V GT20



F: Insert with sharp cutting edge



V: offset

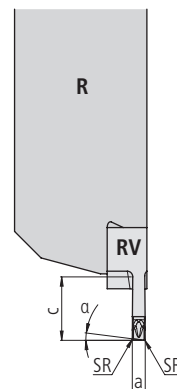

Order designation		Carbide**						Dimensions					Holders**
L	R	-	-	●	○	●	●						
		-	●	●	○	●	●						
		○	○	-	○	○	○						
		●	○	-	●	○	-						
		-	-	●	-	-	-						
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+	a	c	α	SR*		
PREMIUM-LINE													
1602-0.8-5 FLV GT20 ...	1602-0.8-5 FRV GT20 ...				■	■	■	0.8	5	7°	0.05		1600...
1602-1.0-5 FLV GT20 ...	1602-1.0-5 FRV GT20 ...				■	■	■	1	5	7°	0.05		1600...
1602-1.5-5 FLV GT20 ...	1602-1.5-5 FRV GT20 ...				■	■	■	1.5	5	7°	0.05		1600...

* SR: Protection radius

G-LINE cutting specification 29



Item 300362


** Can be found in general catalogue 2022/23



- Technical information
- Holder multidec®-CUT 1600

9-29

90-104

www.utilis.com




CUT off (neutral)
chip breaker "GT20"

1602... F.N GT20



F: Insert with sharp cutting edge


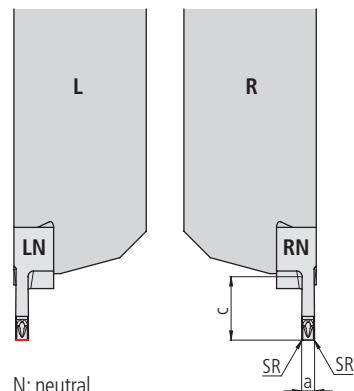


N: neutral



Order designation		Carbide**						Dimensions					Holders**
L	R	-	-	●	○	●	●	a					
		-	●	●	○	●	●						
		○	●	●	○	○	●						
		●	○	-	●	○	-						
		-	-	●	-	-	-						
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+	c			SR*		
PREMIUM-LINE													
1602-0.8-5 FLN GT20 ...	1602-0.8-5 FRN GT20 ...				■	■	■	0.8	5		0.05		1600...
1602-1.0-5 FLN GT20 ...	1602-1.0-5 FRN GT20 ...				■	■	■	1	5		0.05		1600...
1602-1.5-5 FLN GT20 ...	1602-1.5-5 FRN GT20 ...				■	■	■	1.5	5		0.05		1600...

* SR: Protection radius


G-LINE cutting specification 29

Front turning, facing, back turning
chip breaker "GA20"

1603... F. GA20



F: Insert with sharp cutting edge

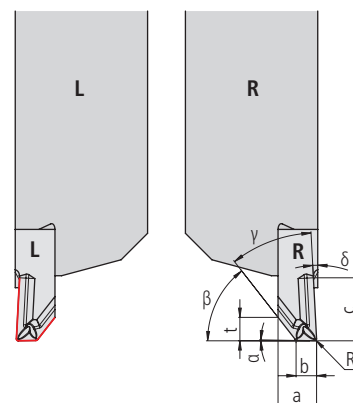

Order designation		Carbide**						Dimensions									Holder**
L	R	-	-	●	○	●	●	a	b	c	β	γ	δ	R	t		
		-	●	●	○	●	●										
		○	●	●	○	○	○										
		●	○	-	●	○	-										
		-	-	●	-	-	-										
		UHM 10	UHM 10 HX	UHM 10 TX+	UHM 20	UHM 20 HPX	UHM 20 TX+										
PREMIUM-LINE																	
1603-3.0-5 FL GA20 TOP ZZ ...	1603-3.0-5 FR GA20 TOP ZZ ...			■	■	■	■	3	1.6	5	52°	35°	3°	-	1.5	1600...	
1603-3.0-5 FL GA20 TOP R03...	1603-3.0-5 FR GA20 TOP R03...			■	■	■	■	3	1.6	5	52°	35°	3°	0.03	1.5	1600...	
1603-3.0-5 FL GA20 TOP R05...	1603-3.0-5 FR GA20 TOP R05...			■	■	■	■	3	1.6	5	52°	35°	3°	0.05	1.5	1600...	
1603-3.0-5 FL GA20 TOP R15...	1603-3.0-5 FR GA20 TOP R15...			■	■	■	■	3	1.6	5	52°	35°	3°	0.15	1.5	1600...	

G-LINE cutting specification 30




Item 300362


** Can be found in general catalogue 2022/23

- Technical information
- Holder multidec®-CUT 16009-29
90-104


www.utilis.com




Legend 4...




Front turning, facing, back turning and copy turning
chip breaker "GM20"



1603... F. GM20





F: Insert with sharp cutting edge

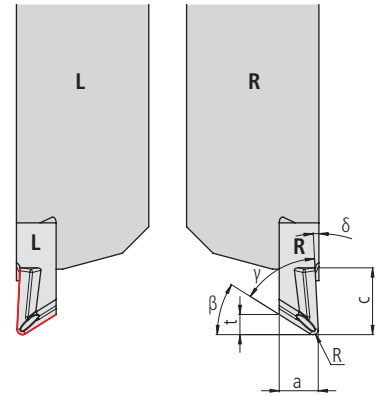


Order designation		Carbide*						Dimensions							Holders*
L	R	-	-	●	○	●	●	a	c	β	γ	δ	R	t	
		-	●	●	○	●	●								
		○	●	●	○	○	○								
		●	○	○	-	-	-								
		-	-	●	-	-	○								
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+								
PREMIUM-LINE															
1603-3.0-5 FL GM20 R40...	1603-3.0-5 FR GM20 R40...				■	■	■	3	5	32°	55°	3°	0.4	1.2	1600...


G-LINE cutting specification 30

Copy turning (back)
chip breaker "GB20"

1604... F. GB20



F: Insert with sharp cutting edge

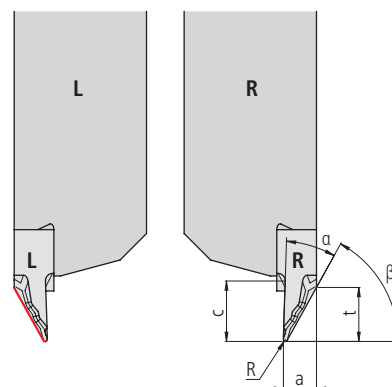

Order designation		Carbide*						Dimensions							Holder*
L	R	-	-	●	○	●	●	a	c	α	β	R	t		
		○	●	●	○	○	●								
		○	○	○	○	○	○								
		-	-	●	-	●	-								
		-	-	●	-	●	-								
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+								
PREMIUM-LINE															
1604-2.5-4-5 FL 29005 GB20 ...	1604-2.5-4-5 FR 29005 GB20 ...				■	■	■	2.5	4.5	27°	61°	0.05	4		1600...
1604-2.5-4-5 FL 29015 GB20 ...	1604-2.5-4-5 FR 29015 GB20 ...				■	■	■	2.5	4.5	27°	61°	0.15	4		1600...

G-LINE cutting specification 30



Item 300362


* Can be found in general catalogue 2022 / 23

- Technical information
- Holder multidec®-CUT 1600


9-29

90-104

www.utilis.com





Legend 4...




Copy turning (back, offset)
chip breaker "GB20"




1604... F.V GB20





F: Insert with sharp cutting edge

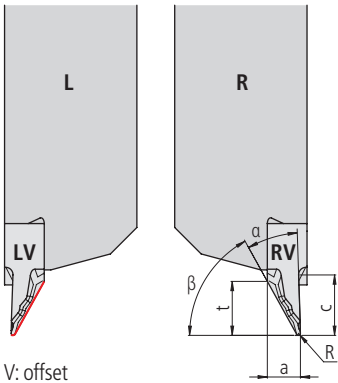


Order designation		Carbide**						Dimensions							Holder**
L	R	-	-	●	○	●	●	a	c	α	β	R	t		
		-	●	●	○	●	●								
		○	●	●	○	○	●								
		●	○	-	●	○	-								
		-	-	●	-	-	-								
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+								
PREMIUM-LINE															
1604-2.5-4-5 FLV 29005 GB20 ...	1604-2.5-4-5 FRV 29005 GB20 ...				■	■	■	2.5	4.5	27°	61°	0.05	4		1600...
1604-2.5-4-5 FLV 29015 GB20 ...	1604-2.5-4-5 FRV 29015 GB20 ...				■	■	■	2.5	4.5	27°	61°	0.15	4		1600...

Grooving and turning
chip breaker "GC20"

1605... F. GC20



F: Insert with sharp cutting edge

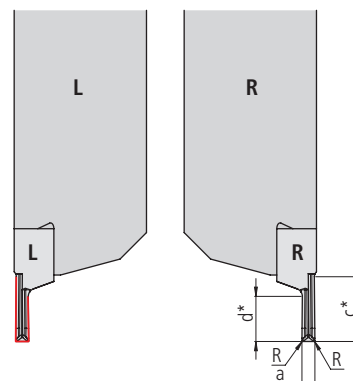

Order designation		Carbide**						Dimensions					Holder**
L	R	-	-	●	○	●	●	a	c*	d*	R		
		-	●	●	○	●	●						
		○	●	●	○	●	●						
		●	○	-	●	○	-						
		-	-	●	-	-	-						
		-	-	●	-	-	-						
JHM 10	JHM 10HX	JHM 10TX+	JHM 20	JHM 20HPX	JHM 20TX+								

PREMIUM-LINE

1605-0.5-1.5 FL GC20 ZZ...	1605-0.5-1.5 FR GC20 ZZ...				■	■	■	0.5	1.5	1.5		-		1600...
1605-0.5-1.5 FL GC20 R02...	1605-0.5-1.5 FR GC20 R02...				■	■	■	0.5	1.5	1.5		0.02		1600...
1605-0.8-1.5 FL GC20 ZZ...	1605-0.8-1.5 FR GC20 ZZ...				■	■	■	0.8	1.5	1.5		-		1600...
1605-0.8-1.5 FL GC20 R02...	1605-0.8-1.5 FR GC20 R02...				■	■	■	0.8	1.5	1.5		0.02		1600...
1605-0.8-1.5 FL GC20 R05...	1605-0.8-1.5 FR GC20 R05...				■	■	■	0.8	1.5	1.5		0.05		1600...
1605-1.0-1.5 FL GC20 ZZ...	1605-1.0-1.5 FR GC20 ZZ...				■	■	■	1	1.5	1.5		-		1600...
1605-1.0-1.5 FL GC20 R02...	1605-1.0-1.5 FR GC20 R02...				■	■	■	1	1.5	1.5		0.02		1600...
1605-1.0-1.5 FL GC20 R05...	1605-1.0-1.5 FR GC20 R05...				■	■	■	1	1.5	1.5		0.05		1600...
1605-1.0-3.5 FL GC20 ZZ...	1605-1.0-3.5 FR GC20 ZZ...				■	■	■	1	5	3.5		-		1600...
1605-1.0-3.5 FL GC20 R05...	1605-1.0-3.5 FR GC20 R05...				■	■	■	1	5	3.5		0.05		1600...
1605-1.5-4.5 FL GC20 R05...	1605-1.5-4.5 FR GC20 R05...				■	■	■	1.5	5	4.5		0.05		1600...
1605-2.0-5 FL GC20 R05...	1605-2.0-5 FR GC20 R05...				■	■	■	2	5	5		0.05		1600...
1605-2.0-5 FL GC20 R15...	1605-2.0-5 FR GC20 R15...				■	■	■	2	5	5		0.15		1600...

* c: maximal turning capacity
d: maximal grooving capacity

G-LINE cutting specification 30



Item 300362


** Can be found in general catalogue 2022/23

- Technical information
- Holder multidec®-CUT 1600


9-29

90-104


www.utilis.com



Legend 4...

CUT off
chip breaker "GS12"

F: Insert with sharp cutting edge


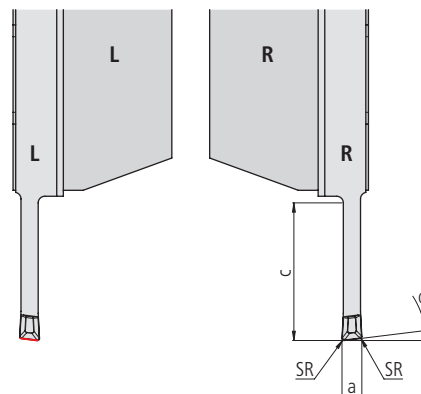


3002... F GS12


Order designation		Carbide**						Dimensions						Holders**	
L	R	-	-	●	○	●	●	a	c	α	SR*				
		-	●	●	○	●	●								
		○	●	●	○	●	●								
		●	○	-	●	○	-								
		-	-	●	-	-	-								
		UHM 10	UHM 10 HX	UHM 10 TX+	UHM 20	UHM 20 HPX	UHM 20 TX+								
PREMIUM-LINE															
3002-1.5-10 FL GS12 ...	3002-1.5-10 FR GS12 ...					■	■	1.5	10	7°		0.15			3000...
3002-1.5-16 FL GS12 ...	3002-1.5-16 FR GS12 ...					■	■	1.5	16	7°		0.15			3000...
3002-2.0-10 FL GS12 ...	3002-2.0-10 FR GS12 ...					■	■	2	10	7°		0.2			3000...
3002-2.0-16 FL GS12 ...	3002-2.0-16 FR GS12 ...					■	■	2	16	7°		0.2			3000...
3002-2.5-13 FL GS12 ...	3002-2.5-13 FR GS12 ...					■	■	2.5	13	7°		0.2			3000...
3002-2.5-16 FL GS12 ...	3002-2.5-16 FR GS12 ...					■	■	2.5	16	7°		0.2			3000...
3002-3.0-16 FL GS12 ...	3002-3.0-16 FR GS12 ...					■	■	3	16	7°		0.2			3000...

* SR: Protection radius


G-LINE cutting specification 29

CUT off (offset)
chip breaker "GS12"

3002... F.V GS12



F: Insert with sharp cutting edge

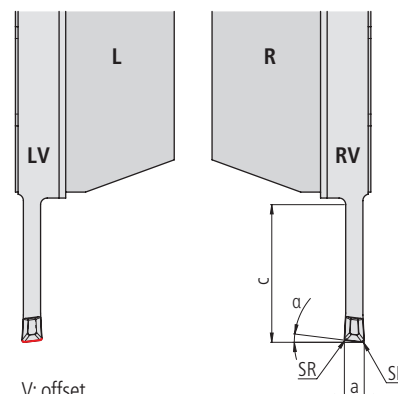

V: offset

Order designation		Carbide**						Dimensions					Holder**
L	R	-	-	●	○	●	●	a	c	α	SR*		
		○	●	●	○	●	●						
		○	○	●	○	○	●						
		●	○	-	●	○	-						
		-	-	●	-	-	-						
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+						

PREMIUM-LINE

3002-1.5-10 FLV GS12 ...	3002-1.5-10 FRV GS12 ...					■	■	1.5	10	7°	0.15		3000...
3002-1.5-16 FLV GS12 ...	3002-1.5-16 FRV GS12 ...					■	■	1.5	16	7°	0.15		3000...
3002-2.0-10 FLV GS12 ...	3002-2.0-10 FRV GS12 ...					■	■	2	10	7°	0.2		3000...
3002-2.0-16 FLV GS12 ...	3002-2.0-16 FRV GS12 ...					■	■	2	16	7°	0.2		3000...
3002-2.5-13 FLV GS12 ...	3002-2.5-13 FRV GS12 ...					■	■	2.5	13	7°	0.2		3000...
3002-2.5-16 FLV GS12 ...	3002-2.5-16 FRV GS12 ...					■	■	2.5	16	7°	0.2		3000...
3002-3.0-16 FLV GS12 ...	3002-3.0-16 FRV GS12 ...					■	■	3	16	7°	0.2		3000...

* SR: Protection radius


G-LINE cutting specification 29




Item 300362

www.utilis.com


** Can be found in general catalogue 2022/23

- Technical information
- Holder multidec®-CUT 30009-29
172-180

Legend 4...

CUT off (neutral)
chip breaker "GS12"

F: Insert with sharp cutting edge

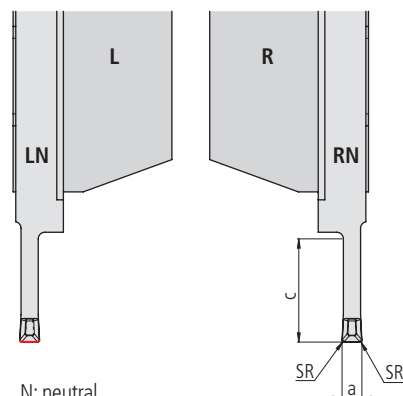

N: neutral

3002... F.N GS12



Order designation		Carbide**						Dimensions					Holder**
L	R	-	-	●	○	●	●	a	c		SR*		
		-	●	●	○	●	●						
		○	○	●	○	●	●						
		●	○	-	●	○	-						
		-	-	●	-	-	-						
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+						

PREMIUM-LINE


3002-0.8-10 FLN GS12 ...	3002-0.8-10 FRN GS12 ...					■	■	0.8	10			0.05		3000...
3002-1.0-10 FLN GS12 ...	3002-1.0-10 FRN GS12 ...					■	■	1	10			0.05		3000...
3002-1.0-16 FLN GS12 ...	3002-1.0-16 FRN GS12 ...					■	■	1	16			0.05		3000...
3002-1.5-10 FLN GS12 ...	3002-1.5-10 FRN GS12 ...					■	■	1.5	10			0.15		3000...
3002-1.5-16 FLN GS12 ...	3002-1.5-16 FRN GS12 ...					■	■	1.5	16			0.15		3000...
3002-2.0-10 FLN GS12 ...	3002-2.0-10 FRN GS12 ...					■	■	2	10			0.2		3000...
3002-2.0-16 FLN GS12 ...	3002-2.0-16 FRN GS12 ...					■	■	2	16			0.2		3000...
3002-2.5-13 FLN GS12 ...	3002-2.5-13 FRN GS12 ...					■	■	2.5	13			0.2		3000...
3002-2.5-16 FLN GS12 ...	3002-2.5-16 FRN GS12 ...					■	■	2.5	16			0.2		3000...
3002-3.0-16 FLN GS12 ...	3002-3.0-16 FRN GS12 ...					■	■	3	16			0.2		3000...

* SR: Protection radius


G-LINE cutting specification 29

CUT off
chip breaker "GT20"

3002... E. GT20



E: Insert with rounded cutting edge

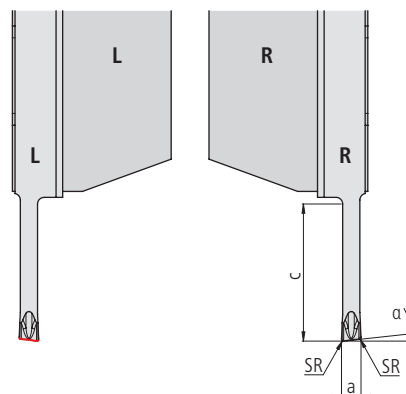

Order designation		Carbide**						Dimensions					Holders**
L	R	-	-	●	○	●	●	a	c	α	SR*		
		○	●	●	○	●	●						
		○	○	○	○	○	○						
		●	○	-	●	○	-						
		-	-	●	-	-	-						
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+						
PREMIUM-LINE													
3002-1.5-10 EL GT20 ...	3002-1.5-10 ER GT20 ...				■	■	■	1.5	10	7°	0.15		3000...
3002-2.0-10 EL GT20...	3002-2.0-10 ER GT20...				■	■	■	2	10	7°	0.2		3000...
3002-2.0-16 EL GT20 ...	3002-2.0-16 ER GT20 ...				■	■	■	2	16	7°	0.2		3000...

* SR: Protection radius

G-LINE cutting specification 29




Item 300362

** Can be found in general catalogue 2022/23


– Technical information
– Holder multidec®-CUT 3000

9–29
172–180


www.utilis.com



Legend 4...

CUT off (offset)
chip breaker "GT20"

E: Insert with rounded cutting edge

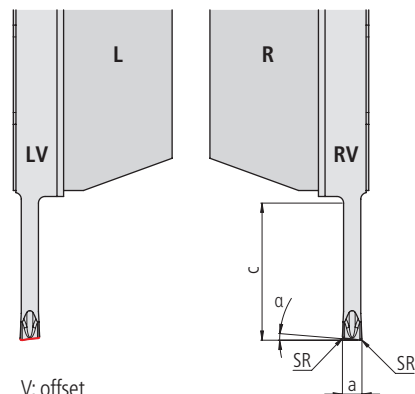

V: offset



Order designation		Carbide**						Dimensions						Holder**
L	R	-	-	●	○	●	●	a	c	α	SR*			
		-	●	●	○	●	●							
		○	●	●	○	●	●							
		●	○	-	●	○	-							
		-	-	●	-	-	-							
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+							
		PREMIUM-LINE												
3002-1.5-10 ELV GT20 ...	3002-1.5-10 ERV GT20 ...				■	■	■	1.5	10	7°	0.15			3000...
3002-2.0-10 ELV GT20 ...	3002-2.0-10 ERV GT20 ...				■	■	■	2	10	7°	0.2			3000...
3002-2.0-16 ELV GT20 ...	3002-2.0-16 ERV GT20 ...				■	■	■	2	16	7°	0.2			3000...

* SR: Protection radius


G-LINE cutting specification 29

CUT off (neutral)
chip breaker "GT20"


3002... E.N GT20



E: Insert with rounded cutting edge



N: neutral

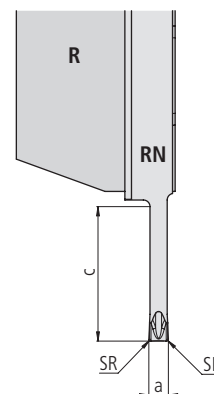

Order designation		Carbide**						Dimensions				Holders**	
L	R	-	-	●	○	●	●						
		○	●	●	○	●	●						
		○	○	-	○	○	-						
		-	-	●	-	-	-						
		-	-	●	-	-	-						
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+	a	c		SR*		

PREMIUM-LINE

3002-1.0-10 ELN GT20 ...	3002-1.0-10 ERN GT20 ...				■	■	■	1	10		0.05		3000...
3002-1.0-16 ELN GT20 ...	3002-1.0-16 ERN GT20 ...				■	■	■	1	16		0.05		3000...
3002-1.5-10 ELN GT20 ...	3002-1.5-10 ERN GT20 ...				■	■	■	1.5	10		0.15		3000...
3002-2.0-10 ELN GT20...	3002-2.0-10 ERN GT20...				■	■	■	2	10		0.2		3000...
3002-2.0-16 ELN GT20 ...	3002-2.0-16 ERN GT20 ...				■	■	■	2	16		0.2		3000...
3002-2.5-13 ELN GT20...	3002-2.5-13 ERN GT20...				■	■	■	2.5	13		0.2		3000...
3002-2.5-16 ELN GT20...	3002-2.5-16 ERN GT20...				■	■	■	2.5	16		0.2		3000...

* SR: Protection radius

G-LINE cutting specification 29



Item 300362

** Can be found in general catalogue 2022/23


- Technical information

9-29


- Holder multidec®-CUT 3000

172-180


www.utilis.com




Legend 4...



Front turning, facing, back turning
chip breaker "GA20"




E: Insert with rounded cutting edge

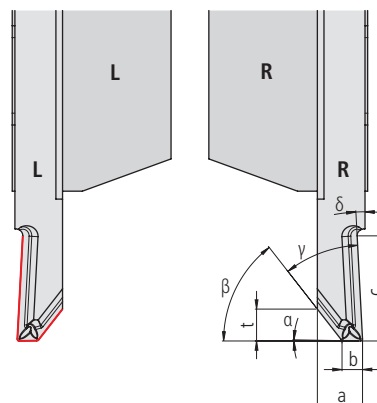



3003... E. GA20

Order designation		Carbide*						Dimensions								Holder*
L	R	-	-	●	○	●	●	a	b	c	β	γ	δ	R	t	
		-	●	●	○	○	●									
		○	●	●	○	○	●									
		●	○	-	○	○	-									
		-	-	●	-	-	-									
		UHM 10	UHM 10 HX	UHM 10 TX+	UHM 20	UHM 20 HPX	UHM 20 TX+									
PREMIUM-LINE																
3003-3.4-8 EL GA20 TOP ZZ ...	3003-3.4-8 ER GA20 TOP ZZ ...				■	■	■	3.4	1.6	8	52°	35°	3°	-	2.0	3000...
3003-3.4-8 EL GA20 TOP R08 ...	3003-3.4-8 ER GA20 TOP R08 ...				■	■	■	3.4	1.6	8	52°	35°	3°	0.08	2.0	3000...
3003-3.4-8 EL GA20 TOP R15 ...	3003-3.4-8 ER GA20 TOP R15 ...				■	■	■	3.4	1.6	8	52°	35°	3°	0.15	2.0	3000...


G-LINE cutting specification 30



Front turning, facing, back turning and copy turning
chip breaker "GM20"



E: Insert with rounded cutting edge

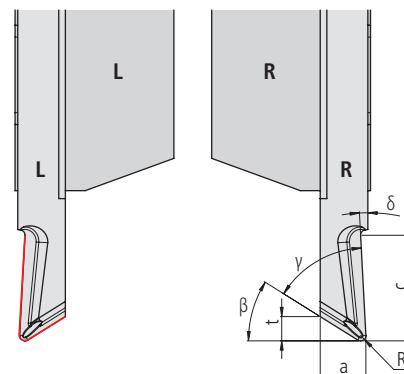

3003... E. GM20

Order designation		Carbide*						Dimensions							Holder*
L	R	-	-	●	○	●	●	a	c	β	γ	δ	R	t	
		○	●	●	○	○	●								
		○	●	●	○	○	●								
		●	○	-	-	-	-								
		-	-	●	-	-	○								
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+								
PREMIUM-LINE															
3003-3.4-8 EL GM20 R40...	3003-3.4-8 ER GM20 R40...				■	■	■	3.4	8	32°	55°	3°	0.4	1.5	3000...

G-LINE cutting specification 30




Item 300362

* Can be found in general catalogue 2022 / 23


- Technical information
- Holder multidec®-CUT 3000

9-29
172-180

www.utilis.com




Legend 4...



Copy turning (back)
chip breaker "GB20"




F: Insert with sharp cutting edge

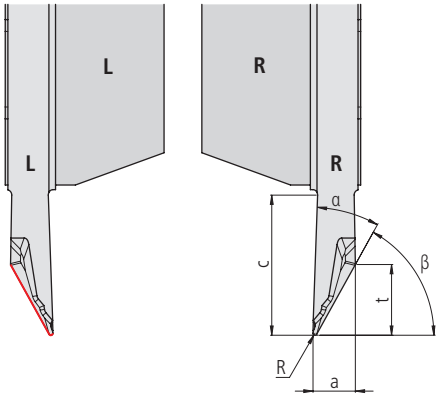


3004... F... GB20

Order designation		Carbide*						Dimensions							Holders*	
L	R	-	-	●	○	●	●	a	c	α	β	R	t			
		-	●	●	○	●	●									
		○	●	●	○	●	●									
		●	○	-	●	○	-									
		-	-	●	-	-	-									
		UHM 10	UHM 10 HX	UHM 10 TX+	UHM 20	UHM 20 HPX	UHM 20 TX+									
PREMIUM-LINE																
3004-3.2-6 FL 29008 GB20 ...	3004-3.2-6 FR 29008 GB20 ...				■	■	■	3.2	11	27°	61°	0.08	5.5		3000...	
3004-3.2-6 FL 29015 GB20 ...	3004-3.2-6 FR 29015 GB20 ...				■	■	■	3.2	11	27°	61°	0.15	5.3		3000...	
3004-3.2-6 FL 29035 GB20 ...	3004-3.2-6 FR 29035 GB20 ...				■	■	■	3.2	11	27°	61°	0.35	4.7		3000...	


G-LINE cutting specification 30

Copy turning (back, offset)
chip breaker "GB20"


3004... F.V ... GB20



F: Insert with sharp cutting edge



V: offset

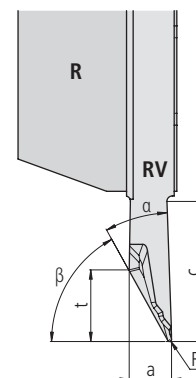

Order designation		Carbide*						Dimensions						Holders*	
L	R	-	-	●	○	●	●	a	c	α	β	R	t		
		○	●	●	○	●	●								
		○	●	●	○	●	●								
		●	○	-	●	○	-								
		-	-	●	-	-	-								
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+								
PREMIUM-LINE															
3004-3.2-6 FLV 29008 GB20 ...	3004-3.2-6 FRV 29008 GB20 ...				■	■	■	3.2	11	27°	61°	0.08	5.5		3000...
3004-3.2-6 FLV 29015 GB20 ...	3004-3.2-6 FRV 29015 GB20 ...				■	■	■	3.2	11	27°	61°	0.15	5.3		3000...
3004-3.2-6 FLV 29035 GB20 ...	3004-3.2-6 FRV 29035 GB20 ...				■	■	■	3.2	11	27°	61°	0.35	4.7		3000...

G-LINE cutting specification 30




Item 300362

* Can be found in general catalogue 2022 / 23


- Technical information
- Holder multidec®-CUT 3000

9-29
172-180

www.utilis.com



Legend 4...

Grooving and turning
chip breaker "GC20"


3005... F/E. GC20



E: Insert with rounded cutting edge



F: Insert with sharp cutting edge

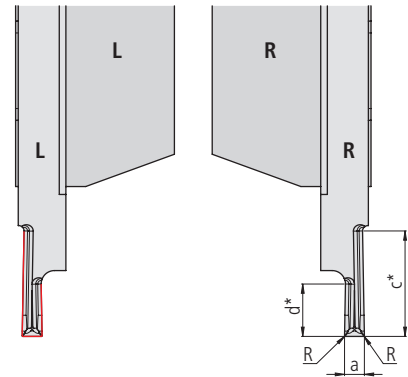

Order designation		Carbide**						Dimensions				Holder**
L	R	-	-	●	○	●	●	a	c*	d*	R	
		-	●	●	○	●	●					
		○	●	●	○	○	●					
		○	○	-	-	○	-					
		-	-	●	-	-	-					
		-	-	●	-	-	-					
		UHM 10	UHM 10HX	UHM 10TX+	UHM 20	UHM 20HPX	UHM 20TX+					

PREMIUM-LINE

3005-1.0-8 FL GC20 ZZ ...	3005-1.0-8 FR GC20 ZZ ...				■	■	■	1	8	3.5	-	3000...
3005-1.0-8 FL GC20 R02 ...	3005-1.0-8 FR GC20 R02 ...				■	■	■	1	8	3.5	0.02	3000...
3005-1.0-8 FL GC20 R05 ...	3005-1.0-8 FR GC20 R05 ...				■	■	■	1	8	3.5	0.05	3000...
3005-1.5-8 FL GC20 ZZ ...	3005-1.5-8 FR GC20 ZZ ...				■	■	■	1.5	8	4	-	3000...
3005-1.5-8 FL GC20 R02 ...	3005-1.5-8 FR GC20 R02 ...				■	■	■	1.5	8	4	0.02	3000...
3005-1.5-8 FL GC20 R05 ...	3005-1.5-8 FR GC20 R05 ...				■	■	■	1.5	8	4	0.05	3000...
3005-2.0-8 EL GC20 R05 ...	3005-2.0-8 ER GC20 R05 ...				■	■	■	2	8	5	0.05	3000...
3005-2.0-8 EL GC20 R15 ...	3005-2.0-8 ER GC20 R15 ...				■	■	■	2	8	5	0.15	3000...
3005-2.5-8 EL GC20 R05 ...	3005-2.5-8 ER GC20 R05 ...				■	■	■	2.5	8	5	0.05	3000...
3005-2.5-8 EL GC20 R05 ...	3005-2.5-8 ER GC20 R05 ...				■	■	■	2.5	8	8	0.05	3000...
3005-2.5-8 EL GC20 R15 ...	3005-2.5-8 ER GC20 R15 ...				■	■	■	2.5	8	5	0.15	3000...
3005-2.5-8 EL GC20 R15 ...	3005-2.5-8 ER GC20 R15 ...				■	■	■	2.5	8	8	0.15	3000...
3005-2.5-8 EL GC20 R35 ...	3005-2.5-8 ER GC20 R35 ...				■	■	■	2.5	8	5	0.35	3000...
3005-2.5-8 EL GC20 R35 ...	3005-2.5-8 ER GC20 R35 ...				■	■	■	2.5	8	8	0.35	3000...
3005-3.0-8 EL GC20 R08 ...	3005-3.0-8 ER GC20 R08 ...				■	■	■	3	8	6	0.08	3000...
3005-3.0-8 EL GC20 R08 ...	3005-3.0-8 ER GC20 R08 ...				■	■	■	3	8	8	0.08	3000...
3005-3.0-8 EL GC20 R15 ...	3005-3.0-8 ER GC20 R15 ...				■	■	■	3	8	6	0.15	3000...
3005-3.0-8 EL GC20 R15 ...	3005-3.0-8 ER GC20 R15 ...				■	■	■	3	8	8	0.15	3000...
3005-3.0-8 EL GC20 R35 ...	3005-3.0-8 ER GC20 R35 ...				■	■	■	3	8	6	0.35	3000...
3005-3.0-8 EL GC20 R35 ...	3005-3.0-8 ER GC20 R35 ...				■	■	■	3	8	8	0.35	3000...

* c: maximal turning capacity
d: maximal grooving capacity

G-LINE cutting specification 30




Item 300362

www.utilis.com

** Can be found in general catalogue 2022/23

- Technical information
- Holder multidec®-CUT 3000

9-29
172-180



Legend 4...

CUT off*

Materials (category) Hardness value (HB) / (HRC)	Carbide	Cutting speeds v_c (m/min)			Feeds f (mm/rev)					
		▼			▼					
Steel non-alloyed (I) 125–300 HB	UHM 20	40–120			0.03–0.1					
	UHM 20 HPX	60–160			0.03–0.1					
	UHM 20 TX+	60–180			0.03–0.1					
Steel low alloyed (II) 180–250 HB	UHM 20	40–110			0.03–0.1					
	UHM 20 HPX	60–170			0.03–0.1					
	UHM 20 TX+	60–160			0.03–0.1					
Steel high alloyed (III) 200–350 HB	UHM 20	40–110			0.01–0.1					
	UHM 20 HPX	60–150			0.01–0.1					
	UHM 20 TX+	60–140			0.01–0.1					
Stainless steel (V) 180–220 HB	UHM 20	40–100			0.01–0.1					
	UHM 20 HPX	80–150			0.01–0.1					
	UHM 20 TX+	70–140			0.01–0.1					
Stainless steel (VI) 220–330 HB	UHM 20	30–70			0.005–0.03					
	UHM 20 HPX	70–90			0.005–0.03					
	UHM 20 TX+	60–80			0.005–0.03					
Titanium (IV) –	UHM 20	40–60			0.01–0.07					
	UHM 20 HPX	50–80			0.02–0.07					
	UHM 20 TX+	50–70			0.02–0.08					
Aluminum (VII) 60–130 HB	UHM 20	100–1500			0.08–0.3					
	UHM 20 HPX	110–1650			0.1–0.3					
	UHM 20 TX+	–			0.1–0.3					
Brass / lead-free brass (VIII) –	UHM 20	80–200			0.08–0.3					
	UHM 20 HPX	88–220			0.1–0.3					
	UHM 20 TX+	90–200			0.1–0.3					
Synthetics reinforced/composites (IX) –	UHM 20	–			–					
	UHM 20 HPX	–			–					
	UHM 20 TX+	–			–					
Hard materials (X) 45–70 HRC	UHM 20	–			–					
	UHM 20 HPX	–			–					
	UHM 20 TX+	–			–					

* Reduce the feed rate by 30 % when feeding in until the insert fully engages and when moving out the final 0.3 mm.

Note

- In order to achieve good results, oil cooling is recommended, preferably at high pressure, with approx. 60 bar. Too much pressure can have a negative influence on chip formation.
- With stable conditions, the use of holders with integrated cooling "IC" and optimum cooling can generally increase the cutting data by up to 30 %.

Grooving and Turning / copy turning*

30

Materials (category) Hardness value (HB) / (HRC)	Carbide	Cutting speeds v_c (m/min)			Feeds f (mm/rev)			Depths of cut a_p (mm)		
		▼	▼▼	▼▼▼	▼	▼▼	▼▼▼	▼	▼▼	▼▼▼
Steel non-alloyed (I) 125–300 HB	UHM 20	40–110	60–120	60–140	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 HPX	150–200	180–220	180–220	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 TX+	130–170	160–194	170–210	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
Steel low alloyed (II) 180–250 HB	UHM 20	50–110	50–120	44–132	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 HPX	90–170	90–180	176–220	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 TX+	80–150	80–160	176–198	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
Steel high alloyed (III) 200–350 HB	UHM 20	40–80	40–80	40–100	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 HPX	60–150	60–160	80–160	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 TX+	60–140	60–150	70–150	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
Stainless steel (V) 180–220 HB	UHM 20	40–100	40–110	40–120	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 HPX	80–150	100–180	120–200	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 TX+	70–130	100–160	120–180	0.03–0.1	0.03–0.15	0.01–0.15	0.5–4	0.1–2.5	0.05–1.5
Stainless steel (VI) 220–330 HB	UHM 20	30–70	30–80	30–80	0.002–0.095	0.002–0.014	0.005–0.014	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 HPX	70–90	80–120	80–150	0.002–0.095	0.002–0.014	0.005–0.014	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 TX+	60–80	70–110	70–130	0.002–0.095	0.002–0.014	0.005–0.014	0.5–4	0.1–2.5	0.05–1.5
Titanium (IV) –	UHM 20	40–60	50–70	60–80	0.002–0.095	0.002–0.014	0.005–0.014	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 HPX	50–100	60–120	60–140	0.002–0.095	0.002–0.014	0.005–0.014	0.5–4	0.1–2.5	0.05–1.5
	UHM 20 TX+	40–80	60–120	60–120	0.002–0.095	0.002–0.014	0.005–0.014	0.5–4	0.1–2.5	0.05–1.5
Aluminum (VII) 60–130 HB	UHM 20	100–500	120–500	160–500	0.1–0.3	0.02–0.25	0.005–0.20	0.5–5	0.1–3	0.05–1.5
	UHM 20 HPX	110–170	130–600	170–600	0.1–0.3	0.02–0.25	0.005–0.20	0.5–5	0.1–3	0.05–1.5
	UHM 20 TX+	100–160	130–600	160–600	0.1–0.3	0.02–0.25	0.005–0.20	0.5–5	0.1–3	0.05–1.5
Brass / lead-free brass (VIII) –	UHM 20	80–200	90–200	140–500	0.1–0.3	0.02–0.15	0.005–0.10	0.5–5	0.1–3	0.05–1.5
	UHM 20 HPX	90–220	100–250	130–600	0.1–0.3	0.02–0.15	0.005–0.10	0.5–5	0.1–3	0.05–1.5
	UHM 20 TX+	90–210	100–240	120–600	0.1–0.3	0.02–0.15	0.005–0.10	0.5–5	0.1–3	0.05–1.5
Synthetics reinforced/composites (IX) –	UHM 20	–	–	–	–	–	–	–	–	–
	UHM 20 HPX	–	–	–	–	–	–	–	–	–
	UHM 20 TX+	–	–	–	–	–	–	–	–	–
Hard materials (X) 45–70 HRC	UHM 20	–	–	–	–	–	–	–	–	–
	UHM 20 HPX	–	–	–	–	–	–	–	–	–
	UHM 20 TX+	–	–	–	–	–	–	–	–	–


* With radial infeed, reduce the feed rate by 30–50 %.

Note

- In order to achieve good results, oil cooling is recommended, preferably at high pressure, with approx. 60 bar. Too much pressure can have a negative influence on chip formation.
- With stable conditions, the use of holders with integrated cooling "IC" and optimum cooling can generally increase the cutting data by up to 30 %.

multidec® General catalog 2022/23

With the slogan **"The reference in micro machining"**, UTILIS presents the multidec® general catalogue 2022/23. The general catalogue contains a wide product range with efficient tools for your needs.

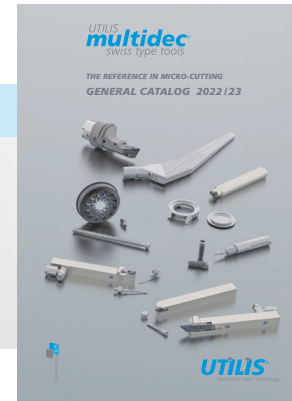

Article 300362


UTILIS
multidec®
swiss type tools

multidec®-LUB – Tool plates, complete

multidec®-LUB tool plate with an integrated coolant system and a tool stop system, which can be quickly and easily replaced with the existing one.

Increase the performance of your machine!

CITIZEN **star** TORNOS



Article 400882

multidec®-MICRO TOOLS & -MILL – Solid carbide precision tools

multidec®-MICRO TOOLS contain various solid carbide micro tools for drilling, milling and TORX® milling. You will find a wide range of universal milling tools in the multidec®-MILL product range.



Article 400925

multidec®-CARE – From the idea to the machine

You have an order or an idea, and you want to know how to implement it? Together, we can realise a cost-effective solution for you.



Article 400885



■ **UTILIS AG, Precision Tools**

Kreuzlingerstrasse 22, 8555 Müllheim, Switzerland
Phone +41 52 762 62 62, Fax +41 52 762 62 00
info@utilis.com, www.utilis.com